


## SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER (SDLVA) 1 - 20 GHz

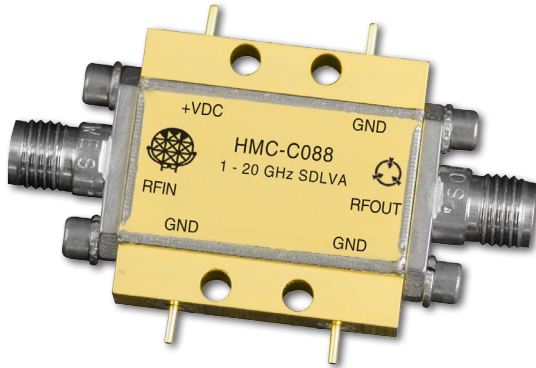


### Typical Applications

The HMC-C088 is ideal for:

- EW, ELINT & IFM Receivers
- DF Radar Systems
- ECM Systems
- Broadband Test & Measurement
- Power Measurement & Control Circuits
- Military & Space Applications

### Functional Diagram

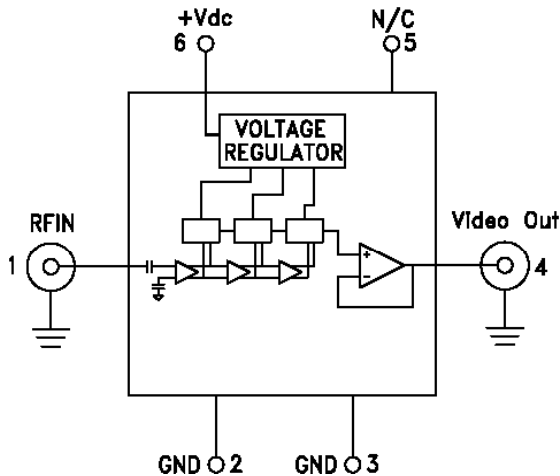

### Electrical Specifications, $T_A = +25^\circ\text{C}$ $V_{dc} = +12\text{V}$

Parameter	Conditions	Typ.	Units
Input Frequency Range		1 - 20	GHz
Frequency Flatness	$P_{in} = -30\text{ dBm}$	$\pm 2$	dB
Log Linearity	$P_{in} = -50\text{ dBm}$ to $+0\text{ dBm}$	$\pm 1$	dBm
Log Linearity over Temperature	$-55$ to $+85^\circ\text{C}$ , $P_{in} = -30\text{ dBm}$	$\pm 1$	dB
Minimum Logging Range	to $\pm 3\text{ dB}$ error	-54	dBm
Maximum Logging Range	to $\pm 3\text{ dB}$ error	+5	dBm
Input Return Loss		9	dB
Log Video Minimum Output Voltage		0.9	V

### Features

- 1 to 20 GHz Operation
- High Logging Range: 59 dB
- Output Frequency Flatness:  $\pm 2\text{ dB}$
- Internal Voltage Regulation
- Fast Rise/Fall Times: 2/7 ns
- Hermetically Sealed Module
- Single Positive Supply: +7V to +16V
- $-55^\circ\text{C}$  to  $+85^\circ\text{C}$  Operating Temperature

### General Description

The HMC-C088 is a Successive Detection Log Video Amplifier (SDLVA) which operates from 1 to 20 GHz. The HMC-C088 provides a logging range of 59 dB.

This product comes standard with two female SMA field replaceable connectors but can also be used with blind mate SMP connectors or as a drop-in module. The package size measures 1.086 x 0.85 x 0.23" (27.58 x 21.6 x 5.84 mm) making it ideal for environmentally robust applications where space is limited.

The HMC-C088 has an integrated voltage regulator that allows the SDLVA to operate from a single supply between +7 and +16V without any appreciable change in performance.

# HMC-C088\* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

---

## COMPARABLE PARTS

View a parametric search of comparable parts.

## DOCUMENTATION

### Data Sheet

- HMC-C088 Data Sheet

## DESIGN RESOURCES

- HMC-C088 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

## DISCUSSIONS

View all HMC-C088 EngineerZone Discussions.

## SAMPLE AND BUY

Visit the product page to see pricing options.

## TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

## DOCUMENT FEEDBACK

Submit feedback for this data sheet.


---

# **SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER (SDLVA) 1 - 20 GHz**


## **Electrical Specifications, (continued)**

Parameter	Conditions	Typ.	Units
Log Video Maximum Output Voltage		1.5	V
Log Video Output Rise Time	Pin = -20 dBm, 10% to 90%	2	ns
Log Video Output Fall Time	Pin = -20 dBm, 90% to 10%	7	ns
Vdc Voltage Range	7 - 16	12	V
Log Video Recovery Time	-50 dBm to 0 dBm	21	ns
Log Video Output Slope		14	mV/dB
Log Video Output Slope Variation over Temperature	@ 10 GHz	5	μV/dB°C
Log Video Propagation Delay		3	ns
Supply Current (Idc)		86	mA


## **Error Flatness vs. Input Power Over Frequency**

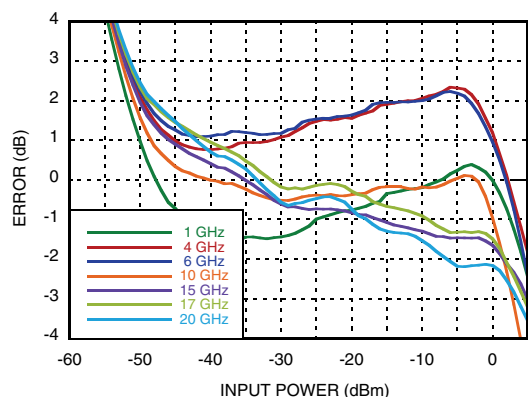


## **X-Band Error Flatness vs. Input Power Over Frequency**

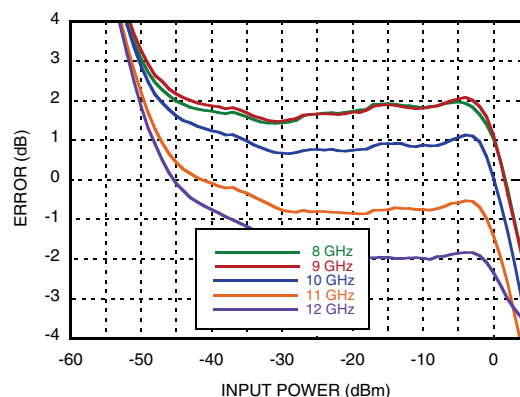

## **VIDEO OUT & Error vs. Input Power, Fin= 1 GHz**

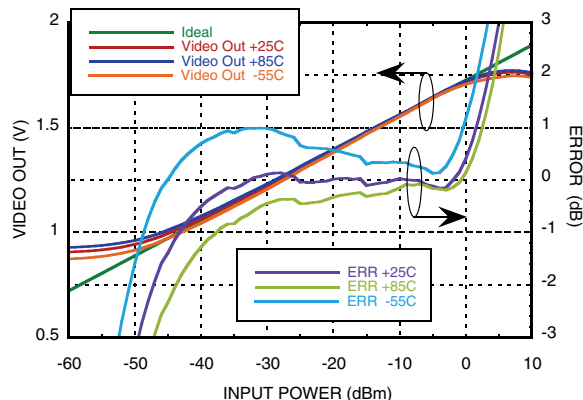


## **VIDEO OUT & Error vs. Input Power, Fin= 4 GHz**

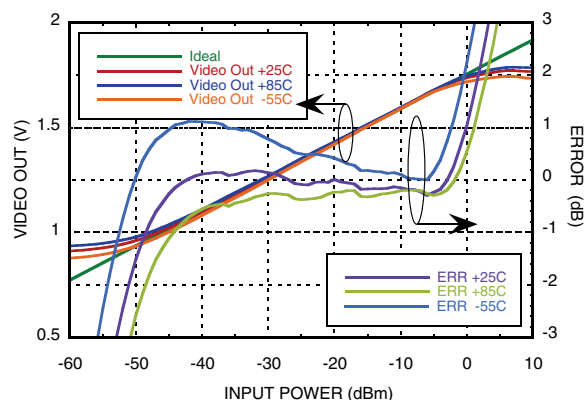


## SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER (SDLVA) 1 - 20 GHz


**VIDEO OUT & Error  
vs. Input Power,  $F_{in}$  = 6 GHz**

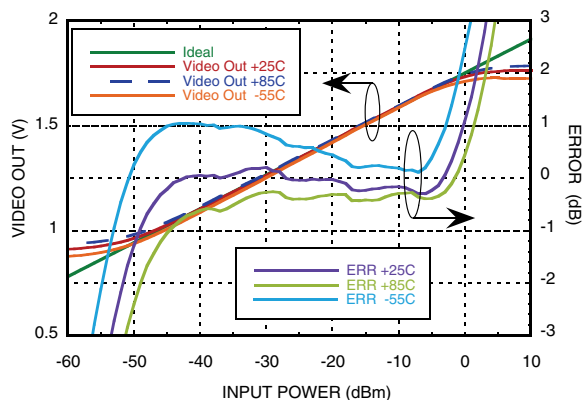


**VIDEO OUT & Error  
vs. Input Power,  $F_{in}$  = 10 GHz**

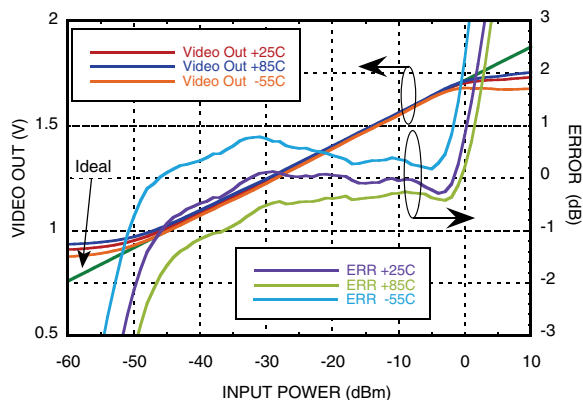


**VIDEO OUT vs. Error  
vs. Input Power,  $F_{in}$  = 12 GHz**

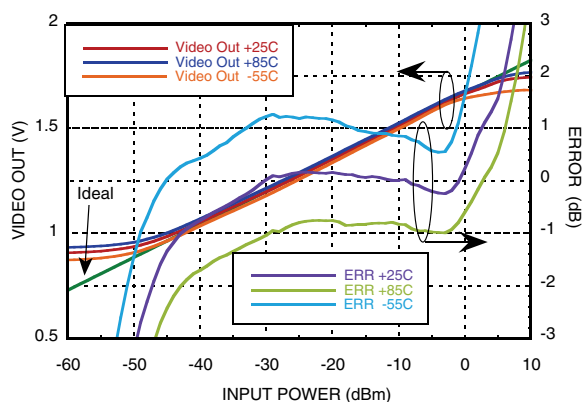


**VIDEO OUT & Error  
vs. Input Power,  $F_{in}$  = 15 GHz**

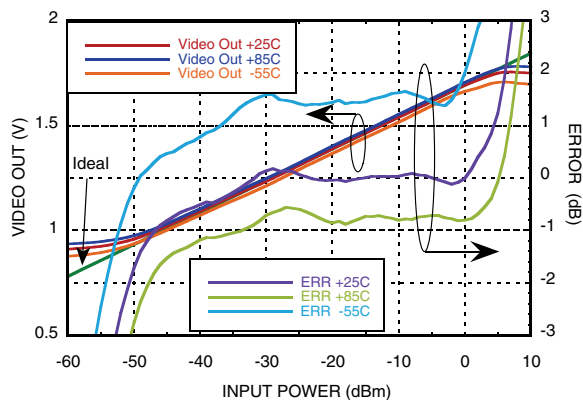

**VIDEO OUT & Error  
vs. Input Power,  $F_{in}$  = 17 GHz**

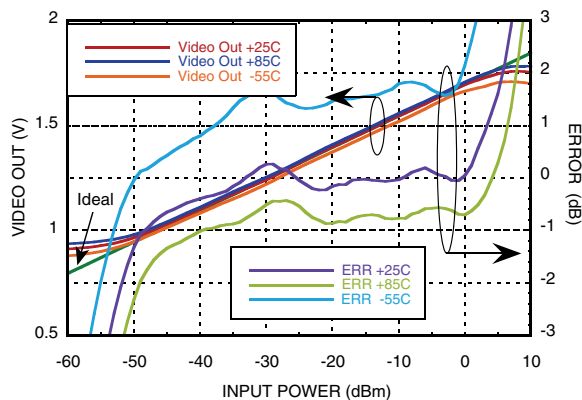


**VIDEO OUT & Error  
vs. Input Power,  $F_{in}$  = 20 GHz**

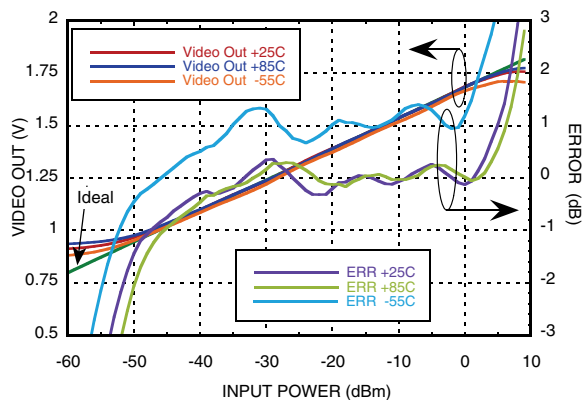


## SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER (SDLVA) 1 - 20 GHz


**VIDEO OUT vs. Frequency  
Over Input Power & Temperature**

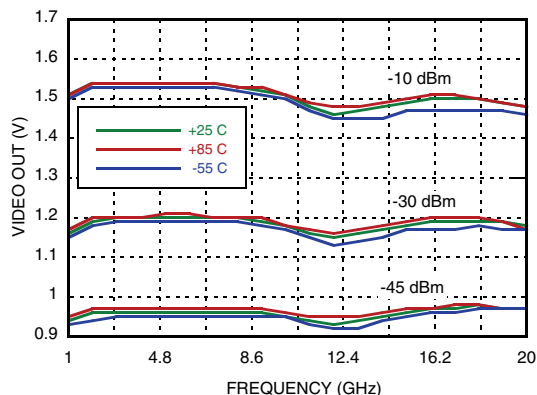


**Input Return Loss vs. Frequency**

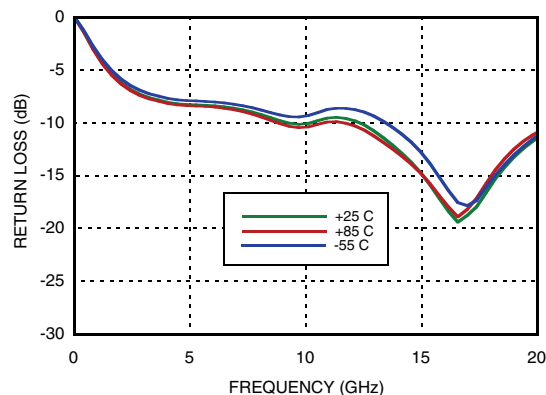

**Rise Time @ 10 GHz @ -20 dBm**

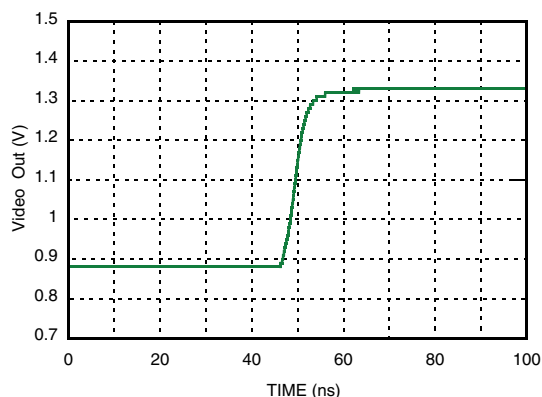

**Fall Time @ 10 GHz @ -20 dBm**

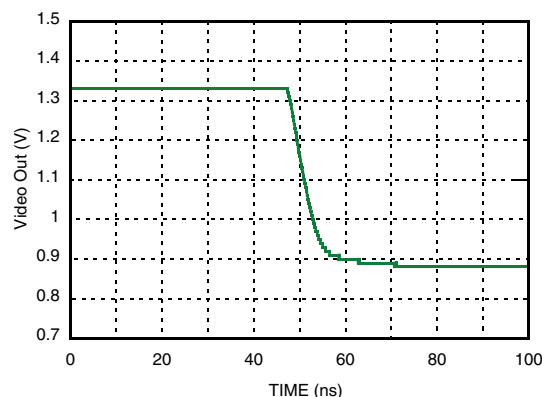

### Absolute Maximum Ratings


I <sub>cc</sub>	100 mA
Input Signal Amplitude	18 dBm
Junction Temperature	125 °C
Continuous P <sub>diss</sub> (T=85°C) Derate 59 mW/°C above 85°C	1.6 W
Thermal Resistance (R <sub>th</sub> ) (junction to package bottom)	17 °C/W
V <sub>dc</sub> Max	+16V
Storage Temperature	-65 to +150 °C
Operating Temperature	-55 to +85 °C
ESD Sensitivity (HBM)	Class 1A



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

**SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER (SDLVA)  
1 - 20 GHz**

**Outline Drawing**

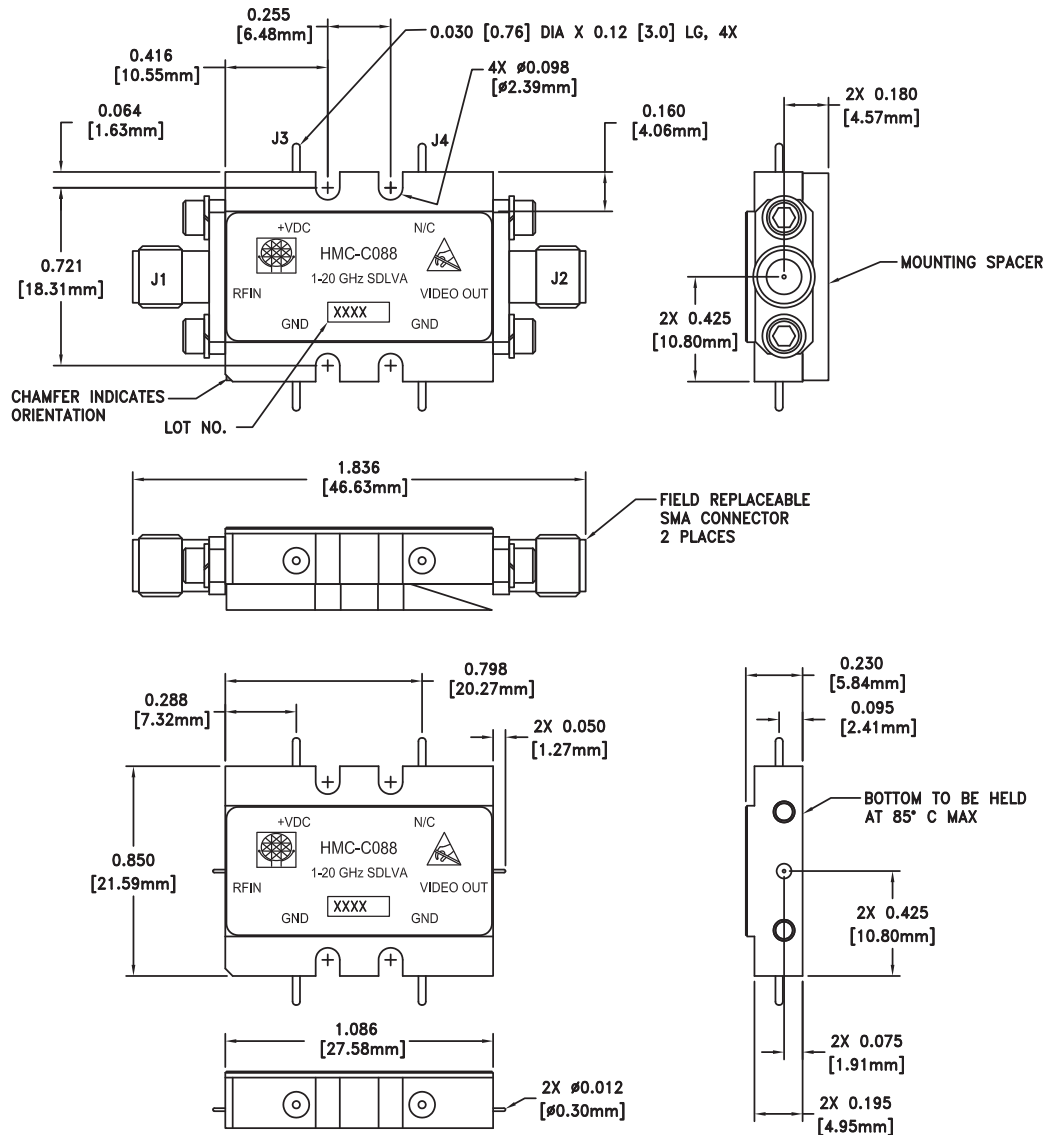

**Package Information**

Package Type	C-10
Package Weight <sup>[1]</sup>	16.7 gms <sup>[2]</sup>
Spacer Weight	3.3 gms <sup>[2]</sup>

[1] Includes the connectors

[2] ±1 gms Tolerance




**NOTES:**

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVAR™
2. PLATING: GOLD PLATE OVER NICKEL PLATE.
3. MOUNTING SPACER: NICKEL PLATED ALUMINUM.
4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
5. TOLERANCES:
  - 5.1 .XX = ±.02
  - 5.2 .XXX = ±.010
6. MARK LOT NUMBER ON 0.080 X 0.250 LABEL WHERE SHOWN WITH .030" MIN TEXT HEIGHT.
7. MOUNTING SPACER PART NUMBER 126216.

# **SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER (SDLVA)** **1 - 20 GHz**

## **Pin Descriptions**

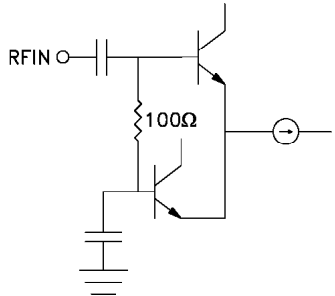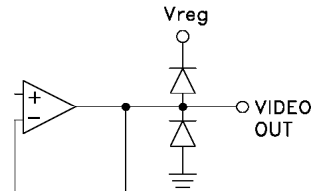Pin Number	Function	Description	Interface Schematic
1	RFIN	RF Input pin.	
2, 3	GND	These pins must be connected to a high quality RF/DC ground.	
4	VIDEO OUT	Video Out is a voltage that is proportional to the log of the Input Power.	
5	N/C	The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
6	Vdc	Bias Supply pin.	