

用途:用于高效 DC/DC 转换和功率开关。


Purpose: These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

特点: 低栅电荷, 低反馈电容, 开关速度快。

Features: Low gate charge, low crss, fast switching.

极限参数/Absolute maximum ratings($T_a=25^{\circ}\text{C}$)

参数符号 Symbol	数值 Rating	单位 Unit
V_{DSS}	400	V
$I_D (T_c=25^{\circ}\text{C})$	6.0	A
$I_D (T_c=100^{\circ}\text{C})$	3.6	A
I_{DM}	24	A
V_{GSS}	± 30	V
I_{AR}	6.0	A
E_{AS}	390	mJ
E_{AR}	8.75	mJ
$P_D (T_c=25^{\circ}\text{C})$	38	W
T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$

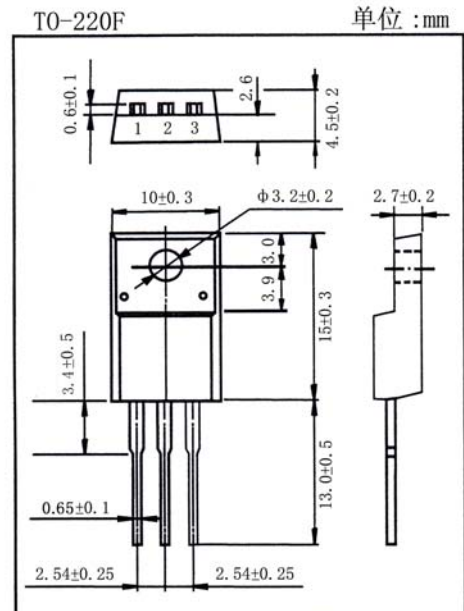

引脚: 1.G 2.D 3.S

电性能参数/Electrical Characteristics($T_a=25^{\circ}\text{C}$)

参数符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	400			V
I_{DSS}	$V_{DS}=400V$ $V_{GS}=0V$			10	μA
	$V_{DS}=320V$ $T_c=125^{\circ}\text{C}$			100	μA
I_{GSS}	$V_{GS}=\pm 30V$ $V_{DS}=0V$			± 0.1	μA
$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.0		4.0	V
$R_{DS(on)}$	$V_{GS}=10V$ $I_D=3.0A$		0.78	0.95	Ω
g_{FS}	$V_{DS}=40V$ $I_D=3.0A$		4.5		S
V_{SD}	$V_{GS}=0V$ $I_S=6.0A$			1.5	V
C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0\text{MHz}$		670	870	pF
C_{oss}			95	125	
C_{rss}			16	21	
$t_{d(on)}$	$V_{DD}=200V$ $I_D=6.0A$ $R_G=25\Omega$		20	50	ns
t_r			50	110	
$t_{d(off)}$			90	190	
t_f			55	120	

IRFS730 (CS730F)

