

ISL9021

250mA Single LDO with Low I_Q , Low Noise and High PSRR LDO

FN6867
Rev 2.00
January 14, 2010

The ISL9021 is a single LDO providing high performance low input voltage, high PSRR. It delivers guaranteed continuous 250mA load current and is stable with 1 μ F to 4.7 μ F of output capacitance ($\pm 30\%$) with an ESR range of 5m Ω to 400m Ω .


The input voltage range for the ISL9021 is between 1.5V to 5.5V and the output voltage comes in many fixed voltage options with $\pm 1.8\%$ accuracy over temperature, line and load ranges. Other output voltage within the range of 0.9V to 3.3V may be available upon request. The ISL9021 has typical PSRR of 75dB @ 10kHz and 50dB @ 1MHz.

The reverse current protection feature prevents current from flowing back to the power source when the output voltage is pulled higher than the input.


The ISL9021 is offered in tiny 4-bump 1.155mmx0.975mm WLCSP and 1.6mmx1.6mm 6 Ld μ TDFN packages.

Pinouts

ISL9021
(6 LD 1.6x1.6 μ TDFN)
TOP VIEW



ISL9021
(4 BALL 1.155x0.975 WLCSP)
TOP VIEW



Features

- High Performance LDO with 250mA guaranteed continuous output current
- Input Voltage Range: 1.5V to 5.5V
- Output Voltage Range: 0.9V to 3.3V
- High PSRR: 75dB @ 10kHz, 50dB @ 1MHz
- Low Quiescent Current: 35 μ A
- Dropout Voltage: <150mV @ 250mA
- Stable with 1 μ F to 4.7 μ F Output Capacitance ($\pm 30\%$) with an ESR range of 5m Ω to 400m Ω
- $\pm 1.8\%$ Output Accuracy Over-Temperature/Load/Line
- Soft-start Limits Input Current Surge During Enable
- Current Limit and Overheat Protection
- -40°C to +85°C Operating Temperature Range
- Available in 1.155mmx0.975mm 4-bump WLCSP Package and 1.6mmx1.6mm 6 Ld μ TDFN
- Pb-free (RoHS compliant)

Applications

- PDAs, Cell Phones and Smart Phones
- Portable Instruments, MP3 Players
- Handheld Devices including Medical Handhelds

Ordering Information

| PART NUMBER | PART MARKING | V _O Voltage (Note 2) | TEMP RANGE (°C) | PACKAGE Tape & Reel (Pb-free) | PACKAGE DWG. # |
|-----------------------------|--------------|---------------------------------|-----------------|-------------------------------|----------------|
| ISL9021I1Z-T (Notes 1, 3) | 0211 | 1.1 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1Z-T (Notes 1, 3) | 0212 | 2.1 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I13Z-T (Notes 1, 3) | 0213 | 1.3 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I14Z-T (Notes 1, 3) | 0214 | 1.0 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1BZ-T (Notes 1, 3) | 021B | 1.5 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1CZ-T (Notes 1, 3) | 021C | 1.8 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1FZ-T (Notes 1, 3) | 021F | 2.5 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1GZ-T (Notes 1, 3) | 021G | 2.7 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1JZ-T (Notes 1, 3) | 021J | 2.8 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1KZ-T (Notes 1, 3) | 021K | 2.85 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1MZ-T (Notes 1, 3) | 021M | 3.0 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1NZ-T (Notes 1, 3) | 021N | 3.3 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1PZ-T (Notes 1, 3) | 021P | 1.85 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1RZ-T (Notes 1, 3) | 021R | 2.6 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1SZ-T (Notes 1, 3) | 021S | 1.6 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1TZ-T (Notes 1, 3) | 021T | 1.9 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1WZ-T (Notes 1, 3) | 021W | 1.2 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021I1YZ-T (Notes 1, 3) | 021Y | 0.9 | -40 to +85 | 4 Ball WLCSP | W2x2.4 |
| ISL9021IRU1Z-T (Notes 1, 4) | S1 | 1.1 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRU2Z-T (Notes 1, 4) | S9 | 2.1 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRU3Z-T (Notes 1, 4) | S3 | 1.3 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRU4Z-T (Notes 1, 4) | S0 | 1.0 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUBZ-T (Notes 1, 4) | S4 | 1.5 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUCZ-T (Notes 1, 4) | S6 | 1.8 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUFZ-T (Notes 1, 4) | T0 | 2.5 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUGZ-T (Notes 1, 4) | T2 | 2.7 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUJZ-T (Notes 1, 4) | T3 | 2.8 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUKZ-T (Notes 1, 4) | T4 | 2.85 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUMZ-T (Notes 1, 4) | T5 | 3.0 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUNZ-T (Notes 1, 4) | R8 | 3.3 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUPZ-T (Notes 1, 4) | S7 | 1.85 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRURZ-T (Notes 1, 4) | T1 | 2.6 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUSZ-T (Notes 1, 4) | S5 | 1.6 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUTZ-T (Notes 1, 4) | S8 | 1.9 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUWZ-T (Notes 1, 4) | S2 | 1.2 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |
| ISL9021IRUYZ-T (Notes 1, 4) | R9 | 0.9 | -40 to +85 | 6 Ld µTDFN | L6.1.6x1.6 |

NOTES:

1. Please refer to TB347 for details on reel specifications.
2. For other output voltages, contact Intersil Marketing.
3. These Intersil Pb-free WLCSP and BGA packaged products employ special Pb-free material sets; molding compounds/die attach materials and SnAgCu - e1 solder ball terminals, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free WLCSP and BGA packaged products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
4. These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and NiPdAu plate - e4 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

Absolute Maximum Ratings

Supply Voltage (VIN) +6.5V
 All Other Pins -0.3 to (VIN + 0.3)V

Recommended Operating Conditions

Ambient Temperature Range (TA) -40°C to +85°C
 Supply Voltage (VIN) 1.5 to 5.5V

Thermal Information

Thermal Resistance (Typical, Note 5) θ_{JA} (°C/W)
 4 Ball WLCSP 135.64
 6 Lead μ TDFN 140
 Junction Temperature Range -40°C to +125°C
 Operating Temperature Range -40°C to +85°C
 Storage Temperature Range -65°C to +150°C
 Pb-Free Reflow Profile. see link below
<http://www.intersil.com/pbfree/Pb-FreeReflow.asp>

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTE:

5. θ_{JA} is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379.

Electrical Specifications TA = -40°C to +85°C; VIN = (VO + 0.5V) to 5.5V with a minimum VIN of 1.5V; CIN = 1 μ F; CO = 1 μ F; Parameters with MIN and/or MAX limits are 100% tested at +25°C, unless otherwise specified. Temperature limits established by characterization and are not production tested.

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|---------|--|------|--------|------|------------------------|
| DC CHARACTERISTICS | | | | | | |
| Supply Voltage | VIN | | 1.5 | | 5.5 | V |
| VIN Undervoltage Lockout Threshold | VUVLO+ | VIN Rising | | 1.425 | 1.5 | V |
| | VUVLO- | VIN Falling | 1.3 | 1.375 | | V |
| Ground Current | IDD | Output Enabled; IO = 0; VIN = 1.5V to 5.5V | | 35 | 50 | μ A |
| Shutdown Current | IDDS | VIN = 5.5V, EN = Low, IO = 0 | | 0.1 | 1.0 | μ A |
| Output Voltage Accuracy | | VIN = VO + 0.5V to 5.5V, IO = 1mA to 150mA, TJ = +25°C | -0.8 | | +0.8 | % |
| | | VIN = VO + 0.5V to 5.5V, IO = 1mA to 150mA, TJ = -40°C to +125°C | -1.8 | | +1.8 | |
| Maximum Output Current | IMAX | Continuous | 250 | | | mA |
| Internal Current Limit | ILIM | | 260 | | | mA |
| Dropout Voltage (Notes 6, 7) | VDO | IO = 250mA; VO > 1.8V | | 150 | 250 | mV |
| Thermal Shutdown Temperature | TSD | | | 160 | | °C |
| Thermal Shutdown Hysteresis | | | | 20 | | °C |
| AC CHARACTERISTICS | | | | | | |
| Ripple Rejection (Note 6) | | VIN = 4.5V, VO = 3.3V @ 1kHz | | 60 | | dB |
| | | VIN = 4.5V, VO = 3.3V @ 10kHz | | 75 | | dB |
| | | VIN = 4.5V, VO = 3.3V @ 1MHz | | 50 | | dB |
| Output Noise Voltage (Note 6) | | VIN = 4.2V, TA = +25°C, BW = 10Hz to 100kHz, IO = 10mA | | 8.5*VO | | μ V _{RMS} |
| DEVICE START-UP CHARACTERISTICS | | | | | | |
| Device Enable Time | tEN | Time from assertion of the EN pin to when the output voltage reaches 95% of the VO (nom) | | 250 | 600 | μ s |
| LDO Soft-start Ramp Rate | tSSR | Slope of linear portion of LDO output voltage ramp during start-up | | 30 | 60 | μ s/V |
| EN LOGIC CHARACTERISTICS | | | | | | |
| Input Low Voltage | VIL | | | | 0.4 | V |
| Input High Voltage | VIH | | 1.1 | | | V |
| Input Leakage Current | IL, IIH | | | | 0.1 | μ A |

NOTES:

6. Limits established by characterization and are not production tested.
 7. Dropout voltage is measured as VIN - VO, when VO is 4% lower than the value of VO; when VIN = VO + 0.5V.

Typical Operating Performance

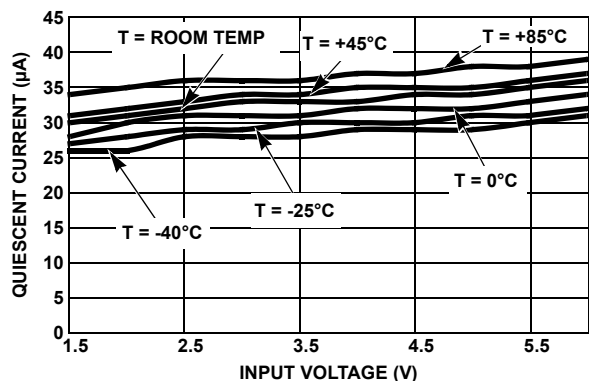


FIGURE 1. QUIESCENT CURRENT vs INPUT VOLTAGE
($V_{OUT} = 0.9V$)

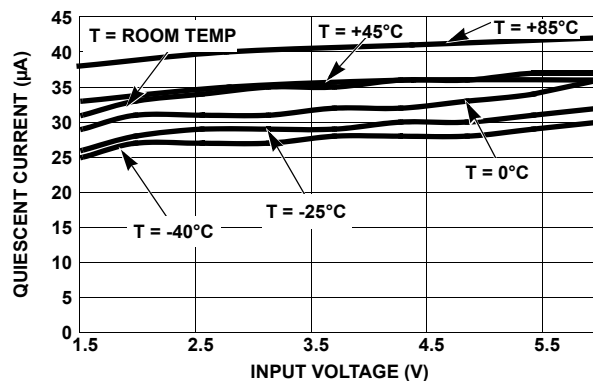


FIGURE 2. QUIESCENT CURRENT vs INPUT VOLTAGE
($V_{OUT} = 1.85V$)

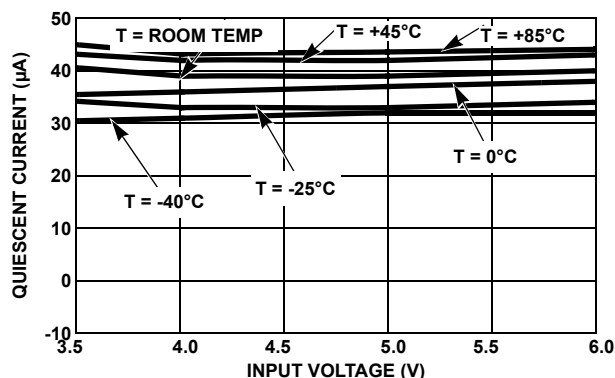


FIGURE 3. QUIESCENT CURRENT vs INPUT VOLTAGE
($V_{OUT} = 3.3V$)

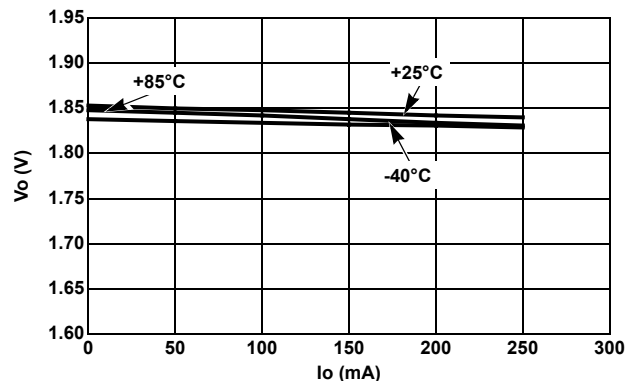


FIGURE 4. LOAD REGULATION vs TEMPERATURE
($V_{OUT} = 1.85V$)

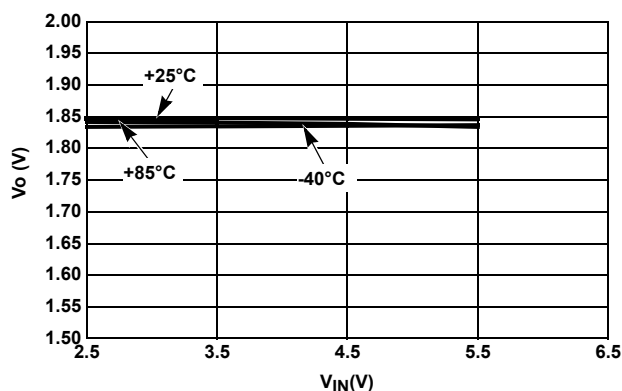


FIGURE 5. LINE REGULATION vs TEMPERATURE
($V_{OUT} = 1.85V$)

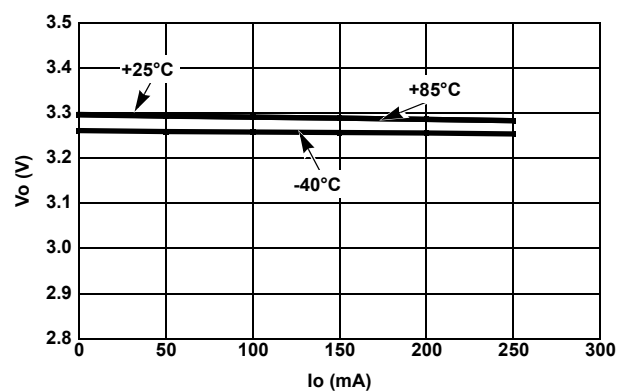


FIGURE 6. LOAD REGULATION vs TEMPERATURE
($V_{OUT} = 3.3V$)

Typical Operating Performance (Continued)

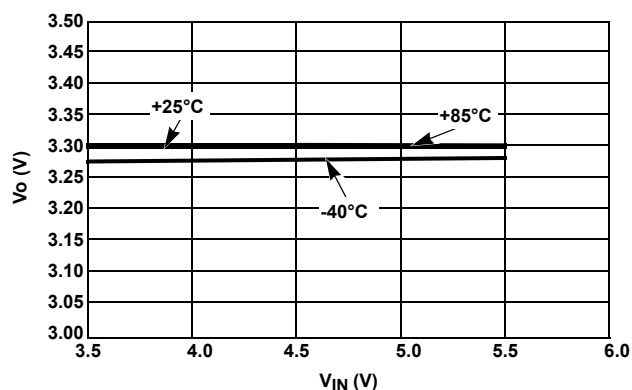


FIGURE 7. LINE REGULATION vs TEMPERATURE
($V_{OUT} = 3.3V$)

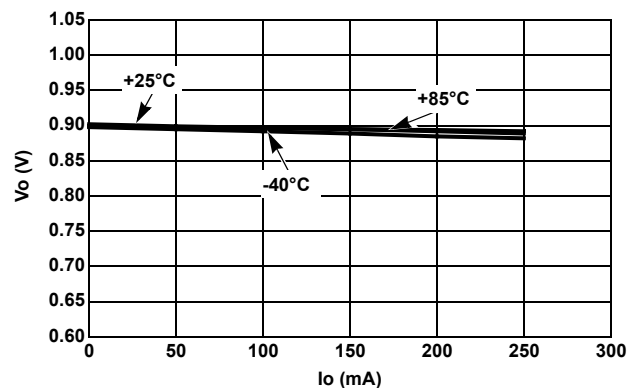


FIGURE 8. LOAD REGULATION vs TEMPERATURE
($V_{OUT} = 0.9V$)

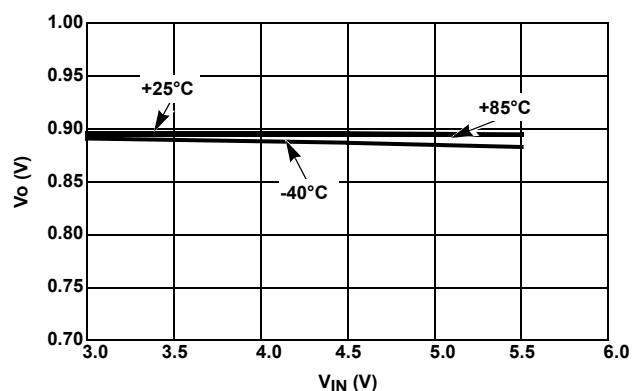


FIGURE 9. LINE REGULATION vs TEMPERATURE
($V_{OUT} = 0.9V$)

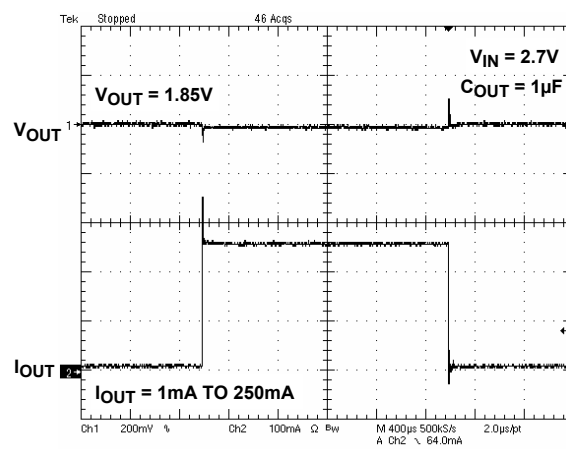


FIGURE 10. LOAD TRANSIENT RESPONSE

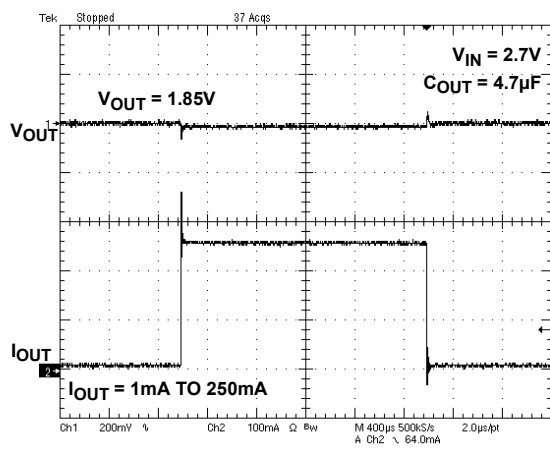


FIGURE 11. LOAD TRANSIENT RESPONSE

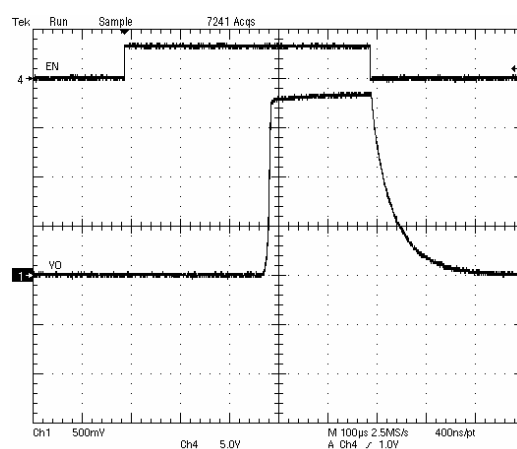


FIGURE 12. ENABLE FUNCTION ($V_{IN} = 3.6V$, $V_{OUT} = 1.85V$,
 $C_{OUT} 1\mu F$)

Typical Operating Performance (Continued)


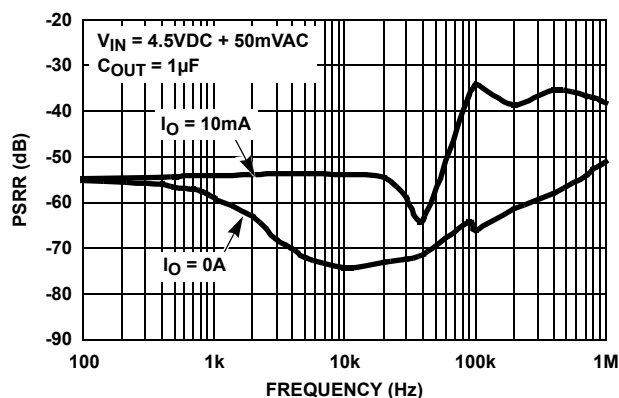


FIGURE 13. POWER SUPPLY REJECTION vs FREQUENCY


Pin Descriptions

| PIN NAME | DESCRIPTION |
|----------|--|
| VIN | IC Supply/LDO Input. Connect a 1 μ F capacitor to GND. |
| GND | System ground pin. |
| EN | LDO Enable. When this signal goes high, the LDO is turned on. |
| VO | LDO Output. Connect a 1 μ F to 4.7 μ F capacitor to GND. |
| E-Pad | For μ TDFN package option only. Connect it to the system ground. |

Typical Application

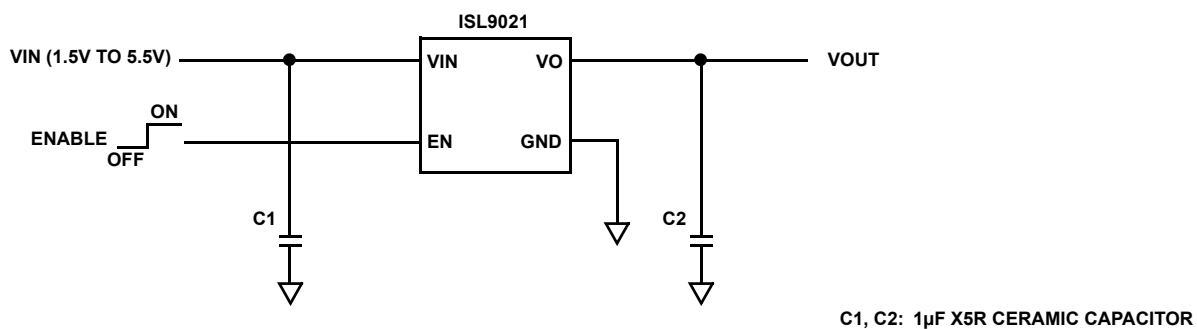

C1, C2: 1 μ F X5R CERAMIC CAPACITOR

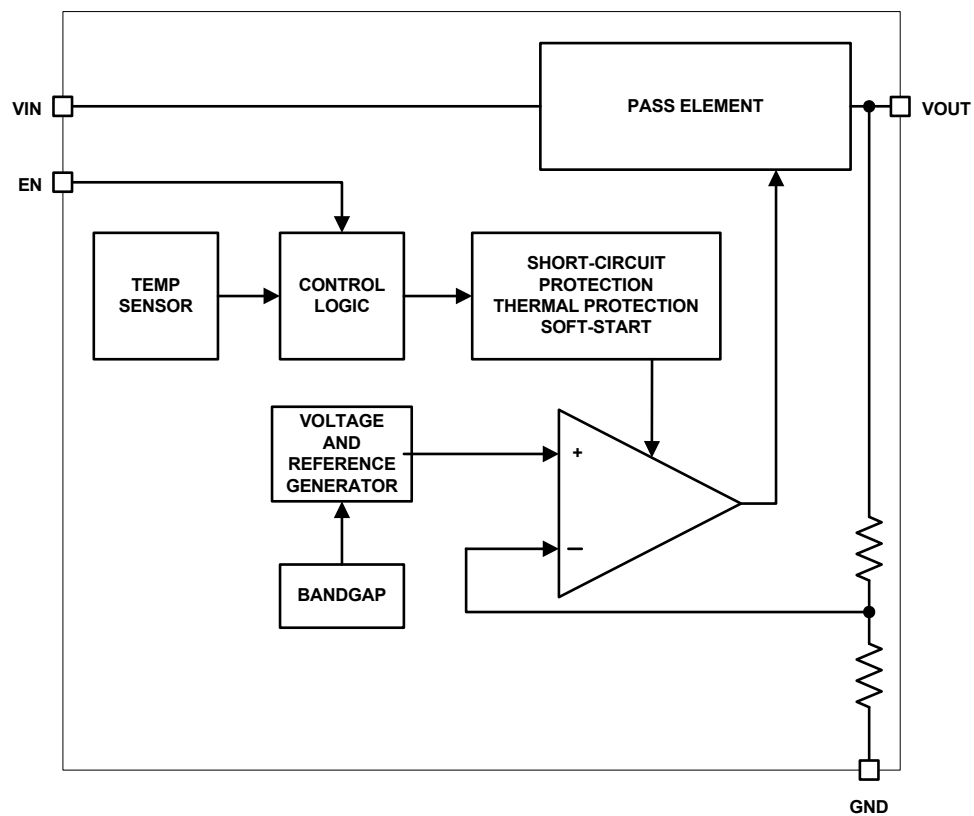Block Diagram

Functional Description

The ISL9021 is a high performance low-dropout regulator (LDO) with 250mA sourcing capability. The extra low ground current makes this part a good choice for handheld product applications. The device also incorporates overcurrent, thermal shutdown, reverse current protections, and soft-start features.

Thermal shutdown protects the device against overheating. Soft-start limits the start-up input current surges. In some applications, the output voltage may be externally pulled higher than input, or the input voltage could be connected to ground, or connected to some voltage lower than the output side. The ISL9021 features reverse current protection; that can block the reverse current from output to input.

Enable Control

The ISL9021 has an enable pin. When EN is low, the IC is in shutdown mode. In this condition, all on-chip circuits are off, and the device draws minimum current, typically less than 0.1 μ A(typ). Driving this pin high will turn on the device.

LDO Protections

The ISL9021 offers several protection functions, making it ideal for use in battery-powered applications. The ISL9021 provides short-circuit protection by limiting the output current at current limit of 260mA(min). If the short circuit lasts long enough, the die temperature increases, and the over-temperature protection circuit will shut down the output. When the die temperature reaches about +145°C, thermal protection starts to work with output being loaded with at least 50mA. Once the die temperature drops to about +110°C, the LDO will resume operation beginning with a soft-start.

The ISL9021's reverse current protection is intended to block reverse conduction if output voltage is higher than input voltage.

Input and Output Capacitors

The ISL9021 provides a linear regulator that has low quiescent current, fast transient response, and overall stable operation across the recommended operating conditions. A ceramic capacitor (X5R or X7R) with a capacitance of 1 μ F to 4.7 μ F with an ESR up to 400m Ω is suitable for the ISL9021 to maintain its output stability. The ground connection of the output capacitor should be routed directly to the GND pin of the device, and also placed close to the IC. Similarly for the input capacitor, usually a 1 μ F ceramic capacitor (X5R or 7R) is suitable for most cases, but if a large, fast rising load transient condition is expected, a higher value input capacitor may be necessary to achieve satisfactory performance.

Board Layout Recommendations

A good PCB layout is an important step to achieve good performance. It is recommended to design the board with separate ground planes for input and output, and connect both ground planes at the GND pin of the IC. Consideration should be taken when placing the components and routing the trace to minimize the ground impedance, and keep the parasitic inductance low. Usually the input/output capacitors should be placed as close to the IC as possible with a good ground connection.

© Copyright Intersil Americas LLC 2009-2010. All Rights Reserved.
All trademarks and registered trademarks are the property of their respective owners.




For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com

Wafer Level Chip Scale Package (WLCSP 0.4mm Ball Pitch)

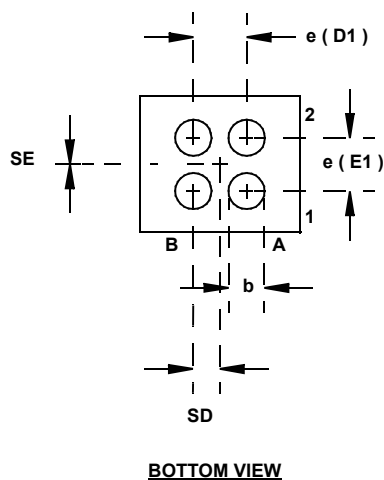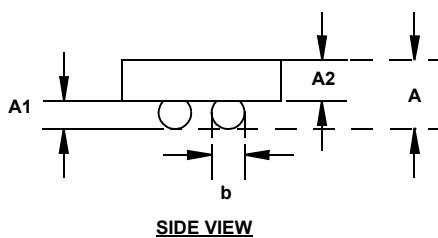

W2x2.4

2x2 ARRAY 4 BALL WAFER LEVEL CHIP SCALE PACKAGE

| SYMBOL | MILLIMETERS |
|--------------------|-------------------------------|
| A | 0.44 Min, 0.495 Nom, 0.55 Max |
| A1 | 0.190 ±0.030 |
| A2 | 0.305 ±0.025 |
| b | 0.270 ±0.030 |
| D | 1.155 ±0.020 |
| D1 | 0.400 BASIC |
| E | 0.975 ±0.020 |
| E1 | 0.400 BASIC |
| e | 0.400 BASIC |
| SD | 0.200 BASIC |
| SE | 0.00 BASIC |
| NUMBER OF BUMPS: 4 | |

Rev. 2 6/08

NOTES:

1. All dimensions are in millimeters.

