


LAN DISCRETE TRANSFORMER MODULES

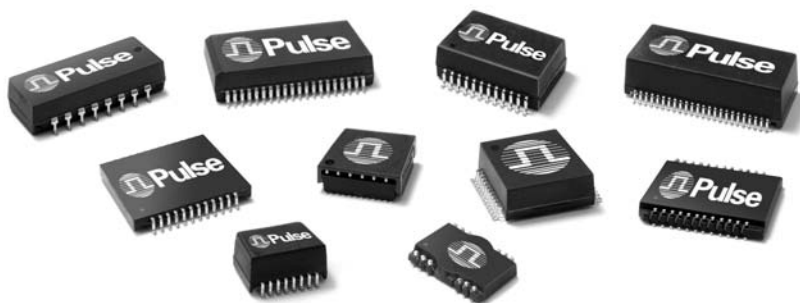

Pulse Discrete Transformer Modules

Pulse offers the most comprehensive line of discrete LAN transformer modules available to the OEM worldwide. Modules for 10/100/1000BASE-T are optimized for all major LAN transceivers. All modules provide electrical circuit isolation that meets IEEE 802.3, while maintaining signal integrity needed for the most demanding applications.

Pulse manufactures the broadest selection of packaging options, from through hole (THT) SIL devices to the smallest available surface mount (SMT) solution at .078" (1.98 mm). For RoHS compliant products, please refer to individual data sheets for details.

NOTE: This catalog section serves as an overview to the LAN discrete modules. For detailed data sheets and a complete list of LAN discrete modules, please go to the Pulse website home page and click the link on the left that says "DATA SHEETS."


For the reader's convenience and to locate multiple platforms easily, view the IC Cross References that start on page 29.

DISCRETE SMT TRANSFORMER MODULES

Number of Ports	Single			Dual		Quad	
Data Rate	10Base-T	10/100TX	Gigabit	10/100TX	Gigabit	10Base-T	10/100TX
Data Sheet Number	E103 (low profile)	H303 (1:1 TR)	HC500 (1:1 TR)	H322 (1:1 TR)	HC500 (1:1 TR)	EC101 (var. TR)	H313 (1.41:1 TR)
	E112 (ext. temp.)	H304 (low profile)	H504 (low profile)	H327 (PoE)	H601 (PoE)		H316 (1:1 TR)
	E115 (1:1 TR)	H314 (var. TR)	H544 (1:1 TR)	H600 (1:1 TR)	H551 (quad/dual)		H321 (2:1 TR)
	EC100 (SMT, THT)	H315 (2:1 TR)	H546 (small footprint)				H327 (PoE)
		H325 (var. TR)	H601 (PoE)				H328 (1:1 TR)
		H326 (var. TR)	H551 (quad/dual)				H600 (1:1 TR)
		H327 (PoE)					
		H328 (1:1 TR)					
		H342 (1:1 TR)					
		H600 (1:1 TR)					

For common mode chokes, see data sheet number G002 at <http://www.pulseeng.com/products/datasheets/G002.pdf>.

LAN FILTERED CONNECTORS

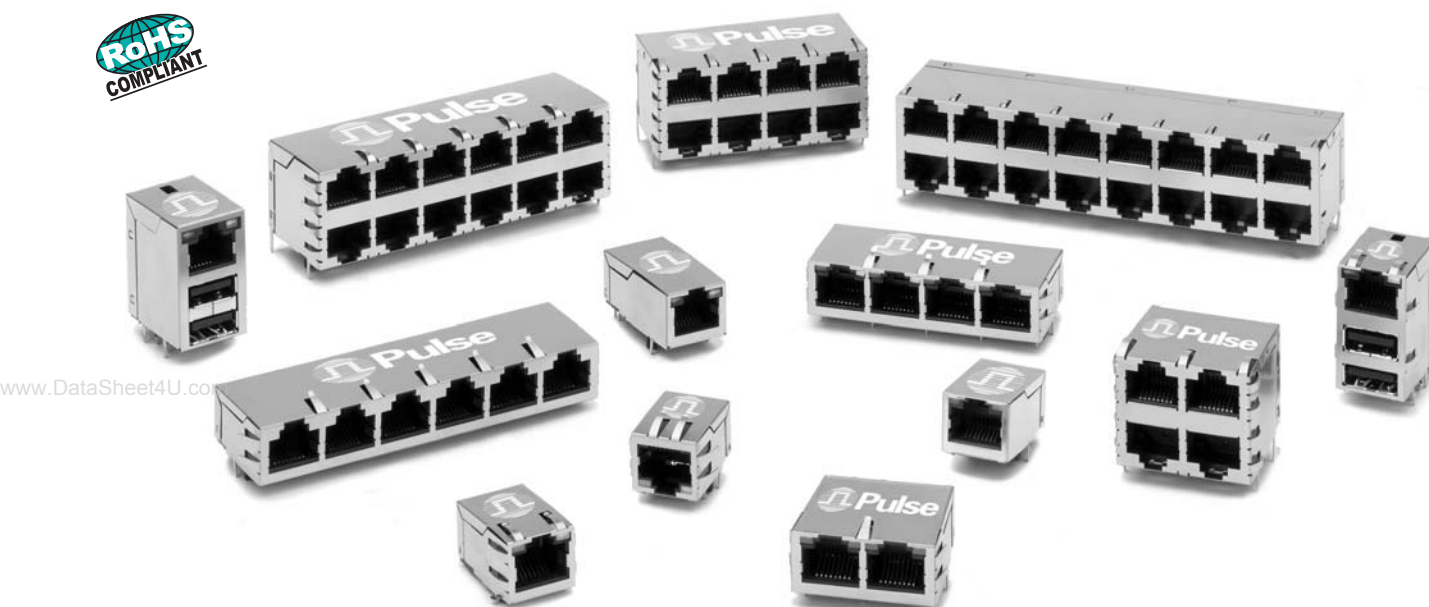

PulseJack™ Filtered Connectors

Pulse offers a broad selection of PulseJack filtered connectors that integrate network magnetics with combinations of RJ45 and USB connectors. In addition to connectivity, these filtered connectors provide signal conditioning, signal isolation and EMI suppression. Designed to meet IEEE 802.3, the PulseJack connectors offer a complete family of single- and multi-port solutions in high-speed applications, including 10/100/1000BASE-T, PoE and other emerging applications. For RoHS compliant products, please refer to the individual data sheets for details.

NOTE: This catalog section serves as an overview to the LAN PulseJack filtered connectors. For detailed data sheets and a complete list of PulseJack filtered connectors, please go to this URL: <http://www.pulseeng.com/products/datasheets.aspx>.

For the readers convenience and to locate multiple platforms easily, view the IC Cross References starting on page 29.

RJ45 FILTERED CONNECTORS

Number of Ports	One Port					1 by 2, 4, 6, 8		2 by 2, 4, 6, 8		One RJ45/dual USB	
Locking Tab Up/Down	Down		Up			Down	Up	N/A		Up	
PCB Mounting Type	THT	SMT	THT	SMT		THT		THT		THT	
Data Rate	10/100TX	10/100TX	10/100TX	Gigabit	10/100TX	10/100TX	Gigabit	10/100TX	Gigabit	10/100TX	Gigabit
Data Sheet Number	J403 J414	J409	J402 J415 (PoE)	J411	J409	J404 J416 (PoE)	J410	J401	J405 J422	J408	J408

LAN GIGABIT IC CROSS REFERENCE



www.DataSheet4U.com

G003.U (2/07)

www.pulseeng.com

www.DataSheet4U.com
29

DISCRETE COMPONENTS & INTEGRATED MODULES										RJ45 & RJ45/USB PLATFORMS ^B								
Manufacturer		IC		Single ^A			Dual ^A		Quad ^A		1x1		1xN		2xN		RJ45/USB	
	Part Number	Ports	Notes	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	
Agere	ET1011, ET1012	1	PHY	H5007	HC500	H5012	HC500	H5400	H551	JK0 Series ^{2,c}	J411	JG0 Series ^{3,c}	J410	JC0 Series ^{4,c}	J405*	JW0 Series ^D	J408	
	ET1081	8	PHY	H5062	H601	H5020 ¹	HC500											
	ET1310	1	MAC/PHY	H5004	HC500	H5014	HC500											
	ET2005-40/50	5	Switch/PHY	H5077	H546	H6080	H601											
	ET2008-30/40/50	5	Switch/PHY	H6062	H601	H5200	H551											
	ET3028-50	28	Switch															
	ET3048-50	48	Switch															
	ET4028-50	28	Switch															
	ET4048-50	48	Switch															
	ET4100	24	Switch															
	ET4128-50	28+2	Switch 1G/10G															
	ET4148-50	48+2	Switch 1G/10G															
	ET4001/4101	48	Switch															
	ET5028-50	28	Switch															
	ET5048-50	48	Switch															
	ET5128-50	28+2	Switch 1G/10G															
	ET5148-50	48+2	Switch 1G/10G															
	GEP11-68			PHY														
Broadcom	BCM5400, BCM5401	1	PHY	H5007	HC500	H5012	HC500	H5401	H551	JK0 Series ^{2,c}	J411	JG0 Series ^{3,c}	J410	JC0 Series ^{4,c}	J405*	JW0 Series ^D	J408	
	BCM5411/21/21S	1	PHY	H5062	H601	H5020 ¹	HC500											
	BCM5460/61	1	PHY	H5004	HC500	H5014	HC500											
	BCM5701/02/03/04/05	1	MAC/PHY	H6062	H601	H6080	H601											
	BCM5707/21/51	1	MAC/PHY			H5201	H551											
	BCM5402	2	PHY															
	BCM5404/14/24	4	PHY															
	BCM5434/35/64/64S	4	PHY															
	BCM5478/5487/5488	8	PHY															
	BCM5345/46/47/48	24, 16, 5	Switch															
	BCM5384/85/88	8, 5, 4	Switch															
	BCM54980	8	PHY															
Intel	82540/ 541/544/543	1	MAC/PHY	H5007	HC500	H5012	HC500	H5400	H551	JK0 Series ^{2,c}	J411	JG0 Series ^{3,c}	J410	JC0 Series ^{4,c}	J405*	JW0 Series ^D	J408	
	82544/545/546/547	1	MAC/PHY	H5062	H601	H5020 ¹	HC500											
	82570	1	MAC/PHY	H5077	H546	H6080	H601											
LSI Logic	L80600	1	PHY	H5007	HC500	H5012	HC500	H5401	H551	JK0 Series ^{2,c}	J411	JG0 Series ^{3,c}	J410	JC0 Series ^{4,c}	J405*	JW0 Series ^D	J408	
	L80601	1	PHY	H5062	H601	H5201	H551											

*NOTE: Part number J40-0019 is found on data sheet J422.

1. Compact foot print dual magnetic cross reference
2. Single port THT tab-up connector cross reference
3. Multipoint 1b/N THT tab-up connector cross reference
4. Multipoint THT 2b/N connector cross reference
5. RJ45/USB single port THT tab-up connector cross reference

A. RX turns ratio is 1:1, TX turns ratio is 1:1, unless otherwise specified.
B. One part is identified in this cross reference. Multiple parts with different platforms can be found on the referenced data sheet.
C. For detailed information about this series, e-mail: prodinfo_lan@pulseeng.com or call Pulse and ask for LAN Applications

NOTE: Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.

SMT - Surface Mount Package THT - Through Hole Package

RJ45 & RJ45/USB PLATFORMS^B

DISCRETE COMPONENTS & INTEGRATED MODULES

Manufacturer	IC		Ports	Notes	Single ^A		Dual ^A		Quad ^A		1x1		1xN		2xN		RJ45/USB	
	Part Number	Part Number			Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet
Marvell Semiconductor	88E1010/101S		1	PHY	H5007	HC500	H5012	HC500	H5400	H551	JK0 Series ^{2 c}	J411	JG0 Series ^{3 c}	J410	JC0 Series ^{4 c}	J405*	JW0 Series ^D	J408
	88E1111/1112		1	PHY	H5062	H601	H5020 ¹	HC500										
	88E1040/1040S/1041		4	PHY	H5077	H546	H6080	H601										
	88E1041S/1042/1042S		4	PHY	H6062	H601	H5200	H551										
	88E1141/1145/1149		8	PHY														
	88E8000/05/06		8	MAC/PHY														
	88E6045		2	PHY														
Micrel	88E6122		6	PHY														
	88E8022/86/50/62		8	MAC/PHY														
Mysticom	KS9020		1	MAC/PHY	H5007	HC500	H5012	HC500	H5401	H551	JK0 Series ^{2 c}	J411	JG0 Series ^{3 c}	J410	JC0 Series ^{4 c}	J405*	JW0 Series ^D	J408
	MY1001		1	PHY	H5062	H601	H5020 ¹	HC500										
National Semiconductor	DP83865		1	PHY	H5007	HC500	H5012	HC500	H5400	H551	JK0 Series ^{2 c}	J411	JG0 Series ^{3 c}	J410	JC0 Series ^{4 c}	J405*	JW0 Series ^D	J408
	DP83864		4	PHY	H5062	H601	H6080	H601										
Realtek	RTL8211/12		1	PHY	H5007	HC500	H5012	HC500	H5401	H551	JK0 Series ^{2 c}	J411	JG0 Series ^{3 c}	J410	JC0 Series ^{4 c}	J405*	JW0 Series ^D	J408
	RTL8169		1	MAC/PHY	H5062	H601	H5020 ¹	H503										
	RTL8100E/01E/10/11B						H5201	H551										
Vitesse Semiconductor	VSC8201/8211		1	PHY	H5007	HC500	H5012	HC500	H5400	H551	JK0 Series ^{2 c}	J411	JG0 Series ^{3 c}	J410	JC0 Series ^{4 c}	J405*	JW0 Series ^D	J408
	VSC8221/8601/8641		1	P6HY	H5062	H601	H5020 ¹	HC500										
	VSC8204/24/34/44		4	PHY	H5084	H544	H6080	H601										
	VSC8558/8538		8	PHY	H6062	H601	H5012	HC500										
	VSC7380/7384		8, 12	GbE switch	H5008	HC500	H5200	H551										
	VSC7388/7398		8	PHY	H5014	HC500												
	VSC7395/7395/7396		5	PHY														
Vitesse	VSC7389/7391		16	PHY														
	VSC7390		24	PHY														
Vitesse	VSC7301/7303		16, 24	GbE switch														

*NOTE: Part number JCO-0019 is on data sheet J422.

1. Compact foot print dual magnetic cross reference

2. Single port THT tab-up connector cross reference

3. Multipoint 1bN THT tab-up connector cross reference

4. Multipoint THT 2bN connector cross reference

5. RJ45/USB single port THT tab-up connector cross reference

A. RX turns ratio is 1:1, TX turns ratio is 1:1, unless otherwise specified.

B. One part is identified in this cross reference. Multiple parts with different platforms can be found on the referenced data sheet.

C. For detailed information about this series, e-mail:

prodinfo_lan@pulseeng.com or call Pulse and ask for LAN

Applications at 858-674-8100

D. LED colors (Green/Yellow, Green-Orange/Yellow)

NOTE: Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.

SMT - Surface Mount Package THT - Through Hole Package

LAN 10/100BASE-TX IC CROSS REFERENCE



www.DataSheet4U.com

LAN 10/100BASE-TX IC Cross Reference

RJ45 & RJ45/USB PLATFORMS ^B									
DISCRETE COMPONENTS									
IC Manufacturer	IC		Turns Ratio ^A	TX	Single Part Number	Data Sheet	Dual Part Number	Quad Part Number	1x1 Part Number
	Part Number	Ports							
Agere	ET901	1	PHY	1:1	H1102	H325	H1270	H322	J0006D21 ³
	ET908	8	PHY	1:1	H1260	H600	HX1294	H322	J1006F21 ³
AMD	AM79C874/C875	1	PHY	1:1	H1102	H325	H1270	H322	J0006D21 ³
	AM79C971/972/C973/AM79C975/C976/C977	1	PHY	1:1	H1102	H325	HX1294	H322	J1006F21 ³
Broadcom	AC101	1	PHY	1:1	H1102	H325	H1270	H322	J0006D21 ³
	AC131	1	PHY	1:1	H1012	H303	HX1294	H322	J1006F21 ³
	BCM5241	1	PHY	1:1	H1012	H303	H2005A ²	H327	JV006I21 ⁴
	BCM5220/ 5221	2	PHY	1:1	H1012	H303	HX1294	H322	J3006G21D ⁵
	BCM5222	2	PHY	1:1	HX1148	H303	H2005A ²	H327	J0C-0003 ⁴
	BCM1100/1101/1112/1190	2	VoIP/PHY	1:1	H2019 ²	H327	H2009 ²	H327	J0018D21 ³
	BCM1115	1	MAC/PHY	1:1	PE-69012 ^E	H304	H2009 ²	H327	J3018G21D ⁵
	BCM6345/6348	1	MAC/PHY	1:1	HX1188 ¹	H325	H2009 ²	H327	J0006D21 ³
	BCM5350/5380	8	Switch	1:1	H1260	H600	H2009 ²	H327	JV006I21 ⁴
	AC104, BCM5208R	4	PHY	1:1	H1260	H600	H2009 ²	H327	J3006G21D ⁵
	AC205/206	5	PHY	1:1	H1112	H326	H2009 ²	H327	J0C-0003 ⁴
	BCM5315/5325(M)/5365	5	MAC/PHY	1:1	HX1188 ¹	H325	H2009 ²	H327	J0011D21B ³
	BCM5226	6	PHY	1:1	H1102	H325	H2009 ²	H327	JV011I21 ⁴
	BCM5248	8	PHY	1:1	H2019 ²	H327	H2009 ²	H327	J00-0014 ³
	AC207/208	8	PHY	1:1	H2019 ²	H327	H2009 ²	H327	J1012F21K ³
	BCM5228/5238/5248	8	PHY	1:1	H2019 ²	H327	H2009 ²	H327	J1012F21K ³
	BCM5318/5338	8	MAC/PHY	1:1	H2019 ²	H327	H2009 ²	H327	J1012F21K ³
	BCM5384	4	Switch	1:1	H0042 ²	H304	H2009 ²	H327	J1012F21K ³
	BCM5721	1	PHY	1:1	H0042 ²	H304	H2009 ²	H327	J1012F21K ³
	BCM5347/5348	48	PHY	1:1	H0042 ²	H304	H2009 ²	H327	J1012F21K ³

1. **Extended** temperature single port discrete magnetic cross reference
2. **PoE / VoIP** single port discrete magnetic cross reference
3. **Single** port THT tab-up/down connector cross reference
4. **Single** port SMT tab-down connector cross reference
5. **Single** port SMT tab-up connector cross reference
6. **Multipoint** 1byN THT tab-down connector cross reference
7. **RJ45/USB** single port THT tab-up connector cross reference

- A. **RX** turns ratio is 1:1, TX turns ratio is 1:1, unless otherwise specified.
- B. **One** part is identified in this cross reference. Multiple parts with different platforms can be found on the referenced data sheet.
- C. **Multipoint** 2byN THT connector cross reference (A=2x4, B=2x6, C=2x8)
- D. **LED** colors (Green/Yellow, Green-Orange/Yellow)
- E. **Low** profile (PCMCIA)

NOTE: Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.

SMT - Surface Mount Package THT - Through Hole Package

RJ45 & RJ45/USB PLATFORMS^B

DISCRETE COMPONENTS

IC Manufacturer	IC		Turns Ratio ^A	Single	Dual		Quad	1x1		1xN		2xN		RJ45/USB ⁷	
	Part Number	Ports		Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet
Cirrus Logic	CS8952	1	PHY	H1102	H325	H1270	H322	J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
	CS8952T	1	PHY	H1260	H600	H2005A ²	H327	J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
Davicom	DM9161	1	PHY	H1012	H325	H1270	H322	J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
	DM9102A	1	MAC/PHY	H1265	H600			J3006G21D ⁵	J409	J8064D628A ⁶	J404				
IC+	DM9601	1	MAC/PHY	H1102	H325			J0C-0003 ⁴	J409	J8064E62 ⁶	J404				
	DM9301/9331	1	PHY	HX1188 ¹	H325					J8064D628A ⁶	J404				
ICS	3097-F, 3299A	1	PHY	H2019 ²	H327					J8064D628A ⁶	J404				
	IP100A	1	PHY	HX2019 ²	H327					J8064D628A ⁶	J404				
Infineon (AMD/Tek)	IP108	8	PHY	HX1188 ¹	H325					J8064D628A ⁶	J404				
	IP1726	26	PHY	HX2019 ²	H327					J8064D628A ⁶	J404				
Intel	IP101	1	PHY	PE-69012 ^E	H304					J8064D628A ⁶	J404				
	ICS1890/1891	1	PHY	H1102	H325	H1270	H322	J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
Infineon (AMD/Tek)	ICS1893	1	PHY	H1260	H600	H2005A ²	H327	J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
	PSB21553	2	PoE/PHY	HX1188 ¹	H325										
Infineon (AMD/Tek)	ADM8511/8513/9511	1	PHY	H1012	H325	H1270	H322	J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
	ADM9513, AN983B	1	PHY	H2019 ²	H327					J8064D628A ⁶	J404			JY0-0016 ^D	J408
Infineon (AMD/Tek)	AN985B/L autoMDX	1	PHY	HX1188 ¹	H325										
	ADM6305, ADM6308/6326/6509	5	PHY	H2019 ²	H327					J8064E62 ⁶	J404	J2045H3A ^C	J401	JW0-0009 ^D	J408
Intel	ADM6609/6909	8,9	PHY	H1260	H600					J8064E62 ⁶	J404	J2045H3B ^C	J401	JY0-0016 ^D	J408
	ADM6996L	5	PHY	HX1294	H327					J8064D648A ⁶	J404	J2045H3C ^C	J401		
Intel	82551/2551QM/551ER	1	MAC/PHY	H1164 ²	H328					J8064D688A ⁶	J404			JW0-0009 ^D	J408
	82562/562E/550	1	MAC/PHY	H1259	H600					J8064E62 ⁶	J404	J20 Series	J401	JY0-0016 ^D	J408
Intel	82559/559ER	1	MAC/PHY	HX1234 ¹	H328					J8064D628A ⁶	J404				
	LX1970A/9711(ALC)/972A	1	PHY	H1112	H326					J8064D628A ⁶	J404				
Intel	LX1973	2	PHY	H2019 ²	H327					J8064D628A ⁶	J404				
	LX1972	1	PHY	PE-69012 ^E	H304					J8064D628A ⁶	J404				

1. **Extended** temperature single port discrete magnetic cross reference

2. **PoE / VoIP** single port discrete magnetic cross reference

3. **Single** port THT tab-up/down connector cross reference

4. **Single** port SMT tab-up/down connector cross reference

5. **Single** port SMT tab-up connector cross reference

6. **Multiport** 1b/N THT tab-down connector cross reference

7. **RJ45/USB** single port THT tab-up connector cross reference

A. **TRX** turns ratio is 1:1, TX turns ratio is 1:1, unless otherwise specified.

B. **One** part is identified in this cross reference. Multiple parts with different

platforms can be found on the referenced data sheet.

C. **Multiport** 1b/N THT connector cross reference (A=2x4, B=2x6, C=2x8)

D. **LED** colors (Green/Yellow, Green-Orange/Yellow)

E. **Low** profile (PCMCIA)

NOTE: Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.

SMT - Surface Mount Package **THT** - Through Hole Package

LAN 10/100BASE-TX IC CROSS REFERENCE (continued)



www.DataSheet4U.com

DISCRETE COMPONENTS										RJ45 & RJ45/USB PLATFORMS ^B								
IC Manufacturer	IC			Turns Ratio ^A	Single Part Number	Data Sheet	Dual		Quad		1x1		1xN		2xN		RJ45/USB ⁷	
	Part Number	Ports	Note				TX	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number
LSI	L80223	1	PHY	1:1	H1102	H325	H1270	H322			J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
	L80225	1	PHY	1:1	H1260	H600	H2005A ²	H327			J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
	L80227	1	PHY	1:1	HX1188 ¹	H325	H2009 ²	H327			JV006I21 ⁴	J409						
					H2019 ²	H327					J3006G21D ⁵	J409						
Marvell					H1012	H303					J0C-0003 ⁴	J409						
					PE-69012 ^E	H304												
	88E6021	3	PHY	1:1	H1102	H325	H1270	H322	H1164 ²	H328	J0006D21 ³	J403	J8064E64 ⁶	J404	J2045H3A C	J401	JW0-0009 ^D	J408
	88E6051	5	PHY	1:1	H1260	H600	H2005A ²	H327	H1259	H600	J1006F21 ³	J402	J8064E68 ⁶	J404	J2045H3B C	J401	JY0-0016 ^D	J408
MICREL	88E6060/88E6218	5/6	PHY	1:1	HX1188 ¹	H325	H2009 ²	H327	HX1234 ¹	H328	JV006I21 ⁴	J409	J8064D648A ⁶	J404	J2045H3C C	J401		
	88E6052, 88E6063	5/6/7	PHY	1:1	H2019 ²	H327			H2017 ²	H327	J3006G21D ⁵	J409	J8064D688A ⁶	J404				
	88E3081/3082/3083	8	PHY	1:1	PE-69012 ^E	H304					J0C-0003 ⁴	J409						
	88E6083	10	Switch	1:1	H1183	H325					JK0654218Z	J411						
MICREL	88E6095	8	Switch	1:1														
	KS8721B/21BL/37	1	PHY	1:1	H1102	H325	H1270	H322			J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
	KS8993/8993M/8993F	3	MAC/PHY	1:1	H1260	H600	H2005A ²	H327			J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
	KS8737	1	PHY	1:1	HX1188 ¹	H325	H2009 ²	H327	HX1234 ¹	H328	JV006I21 ⁴	J409	J8064D648A ⁶	J404	J2045H3C C	J401		
MicroLinear					H2019 ²	H327	H2006A ²	H327	H2017 ²	H327	J3006G21D ⁵	J409						
					PE-69012 ^E	H304					J1011F01P ³	J402						
	KS8695P	5	PHY	1:1	H1102	H325	H1270	H322	H1164 ²	H328	J0006D21 ³	J403	J8064E64 ⁶	J404	J2045H3A C	J401	JW0-0009 ^D	J408
	KS8995/95M/95MA/95E	5	MAC/PHY	1:1	H1260	H600	H2005A ²	H327	H1259	H600	J1006F21 ³	J402	J8064E68 ⁶	J404	J2045H3B C	J401	JY0-0016 ^D	J408
Myson	KS8995X	5	MAC/PHY	1:1	HX1188 ¹	H325	H2009 ²	H327	HX1234 ¹	H328	JV006I21 ⁴	J409	J8064D648A ⁶	J404	J2045H3C C	J401		
	KS8997/KS8998	8	MAC/PHY	1:1	H2019 ²	H327			H2017 ²	H327	J3006G21D ⁵	J409	J8064D688A ⁶	J404				
	KS8999	9	MAC/PHY	1:1	PE-69012 ^E	H304					J0C-0003 ⁴	J409						
	ML6652	1	AutoMDX	1:1	H1102	H325	H1270	H322			J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
Myson					HX1188 ¹	H325	H2009 ²	H327			J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
					PE-69012 ^E	H304					J3006G21D ⁵	J409						
	MTD971	1	PHY	1:1	H1102	H325	H1270	H322	H1164 ²	H328	J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
	MTD972	1	PHY	1:1	H1260	H600	H2005A ²	H327	H1259	H600	J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
Mysticom	MTD981	1	PHY	1:1	HX1188 ¹	H325	H2009 ²	H327	HX1234 ¹	H328	JV006I21 ⁴	J409						
					H2019 ²	H327			H2017 ²	H327	J3006G21D ⁵	J409						
					PE-69012 ^E	H304					J0C-0003 ⁴	J409						
Mysticom	MystiPHY110	1	PHY	1:1	H1102	H325	H1270	H322	H1164 ²	H328	J0006D21 ³	J403	J8064E62 ⁶	J404	J20 Series	J401	JW0-0009 ^D	J408
					H1260	H600	H2005A ²	H327	H1259	H600	J1006F21 ³	J402	J8064D628A ⁶	J404			JY0-0016 ^D	J408
					HX1188 ¹	H325	H2009 ²	H327	HX1234 ¹	H328	JV006I21 ⁴	J409						
					H2019 ²	H327			H2017 ²	H327	J3006G21D ⁵	J409						

NOTE: Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.

- A. RX** turns ratio is 1:1, TX turns ratio is 1:1, unless otherwise specified.
- B. One** part is identified in this cross reference. Multiple parts with different platforms can be found on the referenced data sheet.
- C. Multiport** 2b/N THT connector cross reference (A=2x4, B=2x6, C=2x8)
- D. LED** colors (Green/Yellow, Green-Orange/Yellow)
- E. Low** profile (PCMCIA)

- 1. Extended** temperature single port discrete magnetic cross reference
- 2. PoE / VoIP** single port discrete magnetic cross reference
- 3. Single** port THT tab-up/down connector cross reference
- 4. Single** port SMT tab-down connector cross reference
- 5. Single** port SMT tab-up connector cross reference
- 6. Multiport** 1b/N THT tab-down connector cross reference
- 7. RJ45/USB** single port THT tab-up connector cross reference

SMT - Surface Mount Package THT - Through Hole Package

RJ45 & RJ45/USB PLATFORMS^B

DISCRETE COMPONENTS

IC Manu- facturer	IC		Turns Ratio ^A	Single		Dual		Quad		1x1		1xN		2xN		RJ45/USB ⁷	
	Part Number	Ports		Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet
National Semiconductor	DP83847	1	1:1	H1102	H325	H1270	H322	H1164 2	H328	J0006D21 3	J403	J8064E62 6	J404	J20 Series	J401	JW0-0009 ^D	J408
	DP83848	1	1:1	H1012	H303	HX1294	H322	H1036L	H316	J1006F21 3	J402	J8064D628A 6	J404			JY0-0016 ^D	J408
	DP83816 (macphyter II)	1	1:1			HX1148	H303	H2005A 2	H327	H1259	H600	J1006D21 6	J402				
				H1260	H600	H2009 2	H327	HX1234 1	H328	JV006I21 4	J409						
Realtek				HX1188 1	H325			H2017 2	H327	J3006G21D 5	J409						
				H2019 2	H325					J3006G21D 5	J409						
				PE-69012 E	H304					J0C-0003 4	J409						
				H1112	H326					J0026D21 3	J403						
	RTL8100C/101L/100B	1	1:1	H1102	H325	H1270	H322			J0006D21 3	J403	J8064E62 6	J404	J20 Series	J401	JW0-0009 ^D	J408
	RTL8139/B/C/CL	1	1:1	H1260	H600	H2005A 2	H327			J1006F21 3	J402	J8064D628A 6	J404			JY0-0016 ^D	J408
	RTL8150	1	1:1	H1251	H600	H2009 2	H327			JV006I21 4	J409						
	RTL8201C/L8201BL	1	1:1	H1281	H600					J3006G21D 5	J409						
	RTL8019AS	1	1:1	HX1188 1	H325					J0C-0003 4	J409						
	RTL8181/86	1	1:1	H2019 2	H327					J0026D01B 3	J403						
SIS	RTL8208	8		PE-69012 E	H304					J1012F01C 3	J402						
	RTL8308	8		H0019	H304					J3011G21D 5	J409						
	RTL8309	9		H1112	H326					J1011F01P 3	J402						
										J0011D21 3	J403						
SIS	RTL8208	8	1:1	H1102	H325	H1260	H600	H1164 2	H328	J0006D21 3	J403	J8064E64 6	J404	J2045H3A C	J401	JW0-0009 C	J408
	RTL8316	16	1:1	H1260	H600	H2005A 2	H327	H1259	H600	J1006F21 3	J402	J8064E68 6	J404	J2045H3B C	J401	JY0-0016 D	J408
						H2009 2	H327	HX1234 1	H328			J8064D648A 6	J404	J2045H3C C	J401		
								H2017 2	H327			J8064D688A 6	J404				
SMSC	SIS900	1	1:1	H1102	H325	H1270	H322			J0006D21 3	J403	J8064E62 6	J404	J20 Series	J401	JW0-0009 D	J408
				H1260	H600	H2005A 2	H327			J1006F21 3	J402	J8064D628A 6	J404			JY0-0016 D	J408
				H1260	H600	H2009 2	H327			JV006I21 4	J409						
				H2019 2	H327					J3006G21D 5	J409						
SMSC				PE-69012 E	H304					J0C-0003 4	J409						
	LAN83C183/185	1	1:1	H1102	H325	H1270	H322			J0006D21 3	J403	J8064E62 6	J404	J20 Series	J401	JW0-0009 D	J408
	LAN91C100FD/110	1	1:1	H1260	H600	H2005A 2	H327			J1006F21 3	J402	J8064D628A 6	J404			JY0-0016 D	J408
	LAN91C36, LAN91C96I	1	1:1	HX1188 1	H325	H2009 2	H327			JV006I21 4	J409						
	LAN91C111	1	1:1	H2019 2	H327					J3006G21D 5	J409						
				PE-69012 E	H304					J0C-0003 4	J409						
	LAN9115									J0026D21 3	J403						

1. **Extended** temperature single port discrete magnetic cross reference2. **PoE / VoIP** single port discrete magnetic cross reference3. **Single** port THT tab-up/down connector cross reference4. **Single** port SMT tab-up/down connector cross reference5. **Single** port SMT tab-up connector cross reference6. **Multipoint** 1byN THT tab-down connector cross reference7. **RJ45/USB** single port THT tab-up connector cross reference**A.** RX turns ratio is 1:1, TX turns ratio is 1:1, unless otherwise specified.**B.** One part is identified in this cross reference. Multiple parts with different platforms can be found on the referenced data sheet.**C.** **Multipoint** 2byN THT connector cross reference (A=2x4, B=2x6, C=2x8)**D.** LED colors (Green/Yellow, Green-Orange/Yellow)**E.** Low profile (PCMCIA)**NOTE:** Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.

SMT - Surface Mount Package THT - Through Hole Package

LAN 10/100BASE-TX IC CROSS REFERENCE *(continued)*



www.DataSheet4U.com

RJ45 & RJ45/USB PLATFORMS ^B									
DISCRETE COMPONENTS									
IC Manu- facturer	IC		Turns Ratio ^A	Single		Dual		Quad	
	Part Number	Ports		Part Number	Data Sheet	Part Number	Data Sheet	Part Number	Data Sheet
Teridian (TDK)	78P2123	1	1:1	H1102	H325	H1270	H322	J0006D21 ³	J403
	78Q2123	1	1:1	H1260	H600	H2005A ²	H327	J1006F21 ³	J402
				HX1188 ¹	H325	H2009 ²	H327	JV006I21 ⁴	J409
				H2019 ²	H327	H304		J3006G21D ⁵	J409
				PE-69012 ^E	H304			J0C-0003 ⁴	J409
Texas Instruments	TPS2370/2375	1	1:1	H1102	H325	H1270	H322	J0006D21 ³	J403
				H1260	H600	H2005A ²	H327	J1006F21 ³	J402
				HX1188 ¹	H325	H2009 ²	H327	JV006I21 ⁴	J409
				H2019 ²	H327	H304		J3006G21D ⁵	J409
				PE-69012 ^E	H304			J0C-0003 ⁴	J409
Zarlink (Plessey/Mitel)	MT933	1	1:1	H1102	H325	H1270	H322	J0006D21 ³	J403
				H1260	H600	H2005A ²	H327	J1006F21 ³	J402
				HX1188 ¹	H325	H2009 ²	H327	JV006I21 ⁴	J409
				H2019 ²	H327	H304		J3006G21D ⁵	J409
				PE-69012 ^E	H304			J0C-0003 ⁴	J409
NOTE: Most Pulse products can be manufactured to comply with the RoHS (Restriction of Hazardous Substances) directive. These parts are identified by adding the suffix "NL" at the end of the part number.									

- 1. Extended** temperature single port discrete magnetic cross reference
- 2. PoE / VoIP** single port discrete magnetic cross reference
- 3. Single** port THT tab-up/down connector cross reference
- 4. Single** port SMT tab-down connector cross reference
- 5. Single** port SMT tab-up connector cross reference
- 6. Multipoint** 1byN THT tab-down connector cross reference
- 7. RJ45/USB** single port THT tab-up connector cross reference

SMT - Surface Mount Package THT - Through Hole Package

LAN 10BASE-T IC CROSS REFERENCE (continued)



DISCRETE COMPONENTS

IC Manufacturer	IC Part No.	Pulse Part No.	Ports Supported	Configuration ¹		Turns Ratio ²		Package		Data Sheet
				TX	RX	TX	RX	Style ³	L/W/H (in)*	
AMD	AM79C90, AM79C98, AM79C100, AM79C940, AM79C960, AM79C961, AM79C965, AM79C970, AM79C971, AM79C981, AM79C982, AM79C983, AM79C961 (PC net-ISA II)	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
		E2003	Single Port	R, F, T, C	R, F, T, C	1CT:1	1CT:1	SMT	1.000 / .500 / .230	E115
		J00-0025	Single	T, C	T, C	1CT:2.5	1CT:1	1x1 ICM	21.59 / 16.26 / 13.84 ⁴	J414
		PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
		SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68068	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.600 / .650 / .084	E100
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
	AM79C984, AM79C985, AM79C988, AM79C989	ST4190T	Quad Port	T, C	T, C	1CT:1CT	1:1	SMT	1.112 / .625 / .230	ST4190T
		PE-68049L	Quad Port	T, C	T	1CT:1CT	1:1	SMT	1.125 / .640 / .230	EC101
		PE-68050L	Quad Port	T	T	1CT:1CT	1:1	SMT	1.125 / .640 / .230	EC101
		E5017	Single Port	T, C	T	1CT:1CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
Cirrus Logic	CS8900, CS8920	E2003	Single Port	R, F, T, C	R, F, T, C	1CT:1	1CT:1	SMT	1.000 / .500 / .230	E115
		J00-0025	Single	T, C	T, C	1CT:2.5	1CT:1	1x1 ICM	21.59 / 16.26 / 13.84 ⁴	J414
		PE-68062L	Quad Port	T, C	T	1CT:1.414CT	1:1	SMT	1.125 / .640 / .230	EC101
		PE-68065L	Quad Port	T	T	1CT:1.414CT	1:1	SMT	1.125 / .640 / .230	EC101
		23Z356SM	Single Port	T, C	T, C	1CT:1.414CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		ST7010T	Single Port	T, C	T, C	1CT:1.414CT	1CT:1CT	SMT	.457 / .375 / .230	ST7010T
		PE-65745	Single Port	T	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
		E2003	Single Port	R, F, T, C	R, F, T, C	1CT:1	1CT:1	SMT	1.000 / .500 / .230	E115
		J00-0025	Single	T, C	T, C	1CT:2.5	1CT:1	1x1 ICM	21.59 / 16.26 / 13.84 ⁴	J414
	CS8900A-CQ3	E2023	Single Port	T, C	T, C	1CT:2.5CT	1CT:1CT	SMT	.500 / .375 / .230	EC100
Davicom		E4005	Single Port	T, C	T, C	1CT:2.5CT	1CT:1CT	SMT	.500 / .375 / .230	EC100
		J00-0025	Single	T, C	T, C	1CT:2.5	1CT:1	1x1 ICM	21.59 / 16.26 / 13.84 ⁴	J414
	CS8900A-RQ3	EX2024	Single Port	T, C	T, C	1CT:2.5CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
	DM9008	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
	DM9009	PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
	DM9081	SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
	DM9095	PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
Fujitsu	MB86967	PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
		PE-68030	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
	MB86951, MB86961, MB86964, MB86965B	23Z356SM	Single Port	T, C	T, C	1CT:1.414CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		PE-68048	Single Port	T, C	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
		PE-65745	Single Port	T	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
Intel (Level One)	LXT901A, LXT907A	23Z356SM	Single Port	T, C	T, C	1CT:1.414CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		PE-68048	Single Port	T, C	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
		PE-65745	Single Port	T	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
	LXT905, LXT908	23Z467SM	Single Port	T, C	T, C	1CT:2CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		ST4202T	Single Port	T, C	T, C	1CT:2CT	1CT:1CT	SMT	.477 / .360 / .223	ST4202T
	LXT902	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
		PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
		SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
	LXT914, LXT915, LXT916, LXT917, LXT918, LXT944	PE-68062L	Quad Port	T, C	T	1CT:1.414CT	1:1	SMT	1.125 / .640 / .230	EC101
		PE-68065L	Quad Port	T	T	1CT:1.414CT	1:1	SMT	1.125 / .640 / .230	EC101
		PE-68810	Quad Port	T	—	—	1:1 (4X)	SMT	.500 / .370 / .200	EC100
		PE-68820	Quad Port	T	—	1:1.414 (4X)	—	SMT	.500 / .370 / .200	EC100

1. Configuration: T = Transformer, F = Low Pass Filter, C = Choke, R = Pre-distortion Resistors

(continued on next page)

2. Turns Ratio is referenced chip side to media side.

3. Package Styles: DIL (Dual-In-Line Package), SIL (Single-In-Line Package), SMT (Surface Mount Package), PCMCIA (Ultra Low Profile-SMT)

4. Millimeters

NOTE: ICs are in groups. Each group works with all adjacent Pulse parts.

*L/W/H is measured on surface mount parts tip to tip (height includes wash area).

LAN 10BASE-T IC CROSS REFERENCE (continued)



DISCRETE COMPONENTS

IC Manufacturer	IC Part No.	Pulse Part No.	Ports Supported	Configuration ¹		Turns Ratio ²		Package		Data Sheet
				TX	RX	TX	RX	Style ³	L/W/H (in)*	
LSI	L64381 80C24	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
		E2004	Single Port	R, F, T, C	R, F, T, C	1CT:1	1CT:1	SMT	1.000 / .500 / .230	E115
		PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
		SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
Lucent	T7213, T7241A	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
		PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
		SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
MicroLinear	ML2652, ML2653, ML4652, ML4658	23Z435	Single Port	T	T	2CT:1CT	1CT:1CT	DIL	.800 / .340 / .250	EC100
		23Z435SM	Single Port	T	T	2CT:1CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		PE-68052	Single Port	T, C	T	2CT:1CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
Motorola	MC68160	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
		E2007	Single Port	R, F, T, C	R, F, T, C	1CT:1	1CT:1	SMT	1.000 / .500 / .230	E115
		PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
		SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
National Semiconductor	DP83901A DP83902A, DP83902 DP83905, DP83934	FL1020	Single Port	R, F, T, C	R, F, T, C	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1020
		E2001	Single Port	R, F, T, C	R, F, T, C	1CT:1	1CT:1	SMT	1.000 / .500 / .230	E115
		PE-68017S	Single Port	F, T, C	F, T, C	1CT:1	1CT:1	SIL	1.000 / .210 / .450	E104
		SF1012	Single Port	F, T, C	F, T, C	1:1	1:1	SMT	1.010 / .380 / .246	SF1012
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		FL1012	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	DIL	1.000 / .400 / .338	FL1012
		PE-68056	Single Port	F, T, C	F, T	1CT:1	1CT:1	SMT	.930 / .510 / .230	E115
		PE-68032	Single Port	F, T, C	F, T	1CT:1	1CT:1	PCMCIA	.800 / .675 / .094	E103
	DP83907, DP83924A	E5002	Quad Port	T, C	T, C	1CT:2CT	1:1	SMT	1.125 / .640 / .230	E116
		23Z467SM	Single Port	T, C	T, C	1CT:2CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
Realtek	RTL8301 RTL8019AS RTL8029AS RTL8301	ST4202T	Single Port	T, C	T, C	1CT:2CT	1CT:1CT	SMT	.447 / .360 / .223	ST4202T
		PE-68049L	Quad Port	T, C	T	1CT:1CT	1:1	SMT	1.125 / .640 / .230	EC101
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		PE-68049L	Quad Port	T, C	T	1CT:1CT	1:1	SMT	1.125 / .640 / .230	EC101
SMSC	LAN91C46 LAN91C91 LAN91C96	PE-68026	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		EX2001	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930/510/230	E112
		PE-68056	Single Port	F, T, C	F, T	1CT:1CT	1CT:1CT	SMT	.930 / .510 / .230	E115
		EX2001	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930/510/230	E112
		E2009	Single Port	F, T, C	F, T	1CT:1.414	1CT:1	SMT	1.000 / .500 / .230	E115
	LAN91C111	EX2001	Single Port	F, T, C	F, T, C	1CT:1CT	1CT:1CT	SMT	.930/510/230	E112
Texas Instruments	TNETE100A	23Z356SM	Single Port	T, C	T, C	1CT:1.414CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		PE-65745	Single Port	T	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
		PE-68048	Single Port	T, C	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
	TNETE2004	PE-68062L	Quad Port	T, C	T	1CT:1.414CT	1:1	SMT	1.125 / .640 / .230	EC101
		PE-68065L	Quad Port	T	T	1CT:1.414CT	1:1	SMT	1.125 / .640 / .230	EC101
		23Z356SM	Single Port	T, C	T, C	1CT:1.414CT	1CT:1CT	SMT	.450 / .360 / .215	EC100
		PE-65745	Single Port	T	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
		PE-68048	Single Port	T, C	T	1CT:1.414CT	1CT:1CT	SMT	.500 / .370 / .200	EC100
	TNETE2008	PE-68049L	Quad Port	T, C	T	1CT:1CT	1:1	SMT	1.125 / .640 / .230	EC101
		E5008	Quad Port	T, C	T	1CT:1CT	1:1	SMT	1.125 / .640 / .230	E117

1. Configuration: T = Transformer, F = Low Pass Filter, C = Choke, R = Pre-distortion Resistors

2. Turns Ratio is referenced chip side to media side.

3. Package Styles: DIL (Dual-In-Line Package), SIL (Single-In-Line Package), SMT (Surface Mount Package), PCMCIA (Ultra Low Profile-SMT)

NOTE: ICs are in groups. Each group works with all adjacent Pulse parts.

*L/W/H is measured on surface mount parts tip to tip (height includes wash area).

LAN ATM IC CROSS REFERENCE



ATM NETWORK COMPONENTS

Speed	IC Manufacturer/ IC Part Number	Pulse Part No.	Ports Supported	Configuration ¹		Turns Ratio ²		Package		Data Sheet
				TX	RX	TX	RX	Style ³	L/W/H (in)*	
155 ATM	National / 83223	PE-68517L	Single Port	C, T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.000 / .510 / .370	H303
	MicroLinear / ML6674	PE-68515L	Single Port	T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.000 / .510 / .370	H303
	PMC Sierra / PM5350	H1019	Single Port	C, T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.000 / .510 / .230	H303
		H1012	Single Port	T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.000 / .510 / .230	H303
		H1027	Dual Port	C, T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.125 / .640 / .230	H322
		H1028	Dual Port	T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.125 / .640 / .230	H322
		H1049	Dual Port	T, C, S	C, T	1CT:1CT	1CT:1CT	SMT	1.125 / .640 / .230	H322
		H1036L	Quad Port	T, C	C, T	1CT:1	1CT:1CT	SMT	1.125 / .640 / .230	H316
		H1044	Quad Port	T, C	C, T	1CT:1	1CT:1CT	SMT	1.125 / .640 / .230	H316

1. Configuration: **T** = Transformer, **C** = Choke, **S** = Shunt Inductor

2. Turns Ratio is referenced chip side to media side.

3. Package Style: **SMT**– Surface Mount Package

NOTE: ICs are in groups. Each group works with all adjacent Pulse parts.

*L/W/H is measured on surface mount parts tip to tip (height includes wash area).