



LA5606N

BS/CS Tuner Regulator with On/Off Function

Overview

The LA5606N is a low saturation regulator IC for BS/CS tuner applications, equipped with four regulators capable of ON/OFF control.

Applications

- BS/CS tuner power supply system.
- Audio Video (AV) equipment with BS/CS receivers.
- Compact electronic equipment.

Functions

- Four low saturation regulators (15.7 V/300 mA, 12 V/150 mA, 9 V/100 mA and 5 V/500 mA).
- Output on/off control ("L" active).
- On-chip protective circuitry (current limiter, thermal shutdown).


Features

- Supports compact set design while incorporating four regulators needed by BS/CS tuners.
- Flexible system design by independent on/off control of V_{O1} , V_{O4} , as well as V_{O2} and V_{O3} pair.
- Reduces internal loss by employment of low saturation regulators.
- Adapting three input pins contributes power dissipation reduction and heat sink design.

Package Dimensions

unit: mm

3023A-SIP14H

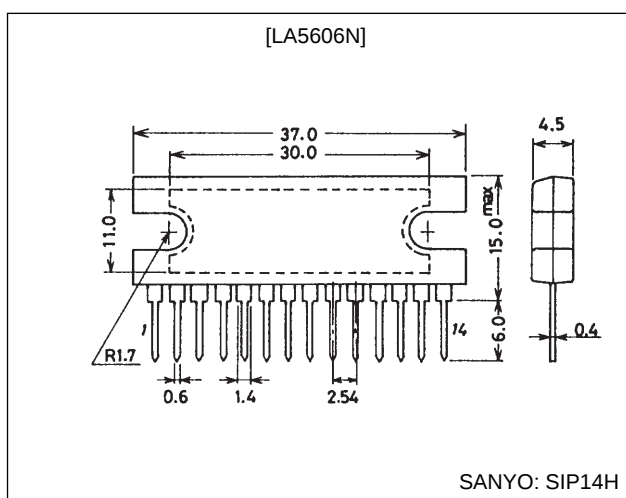

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum input voltage	$V_{IN\text{ max}}$	$V_{IN1} \geq V_{IN2} \geq V_{IN3}$	35	V
Enable pin voltage	$V_{EN\text{ max}}$	EN1, EN2, EN3	$V_{IN\text{ max}}$	V
Allowable power dissipation	$P_{d\text{ max}}$	With infinite heat sink	15	W
		With no heat sink	4.3	W
Operating temperature	T_{opr}		-20 to +80	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Output current 1	I_{O1}	Regulator 1	5 to 350	mA
Output current 2	I_{O2}	Regulator 2	1 to 200	mA
Output current 3	I_{O3}	Regulator 3	1 to 150	mA
Output current 4	I_{O4}	Regulator 4	5 to 500	mA

Operating Characteristics at $T_a = 25^\circ\text{C}$ and the specified Test Circuit

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Regulator 1 (V _{EN1} = low, V _{O1} : ON, V _{IN1} = 18.7 V and I _{O1} = 300 mA)						
Output voltage 1	V _{O1}		14.9	15.7	16.5	V
Dropout voltage	V _{DROP1-1}			0.3	0.5	V
	V _{DROP1-2}	I _{O1} = 150 mA		0.15	0.3	V
Line regulation	ΔV _{OLN1}	17.5 V ≤ V _{IN1} ≤ 23 V		20	100	mV
Load regulation	ΔV _{OLD1}	5 mA ≤ I _{O1} ≤ 300 mA		40	200	mV
Peak output current	I _{OP1}		350	540		mA
Output short current	I _{OSC1}			150		mA
Output on control voltage	V _{ENL1}	V _{O1} : On			1.0	V
Output off control voltage	V _{ENH1}	V _{O1} : Off	4.0		V _{IN1}	V
Output low level voltage	V _{O1} OFF				0.2	V
Output noise voltage	V _{NO1}	10 Hz ≤ f ≤ 100 kHz		110		μVrms
Ripple rejection	Rrej1	f = 120 Hz, 18 V ≤ V _{IN1} ≤ 23 V		50		dB
Regulator 2 (V _{EN2} = low, V _{O2} : ON, V _{IN2} = 15.0 V, I _{O2} = 150 mA)						
Output voltage 2	V _{O2}		11.4	12.0	12.6	V
Dropout voltage	V _{DROP2}			0.3	0.5	V
Line regulation	ΔV _{OLN2}	12.6 V ≤ V _{IN2} ≤ 23 V		20	100	mV
Load regulation	ΔV _{OLD2}	1 mA ≤ I _{O2} ≤ 150 mA		20	70	mV
Peak output current	I _{OP2}		200	270		mA
Output short current	I _{OSC2}			70		mA
Output on control voltage	V _{ENL2}	V _{O2} : On			1.0	V
Output off control voltage	V _{ENH2}	V _{O2} :Off	4.0		V _{IN2}	V
Output low level voltage	V _{O2} OFF				0.2	V
Output noise voltage	V _{NO2}	10 Hz ≤ f ≤ 100 kHz		110		μVrms
Ripple rejection	Rrej2	f = 120 Hz, 13 V ≤ V _{IN2} ≤ 23 V		50		dB
Regulator 3 (V _{EN2} = low, V _{O3} : ON, V _{IN2} = 12 V, I _{O3} = 100 mA)						
Output voltage 3	V _{O3}		8.55	9.0	9.45	V
Dropout voltage	V _{DROP3}			0.3	0.5	V
Line regulation	ΔV _{OLN3}	10.45 V ≤ V _{IN2} ≤ 23 V		20	100	mV
Load regulation	ΔV _{OLD3}	1 mA ≤ I _{O3} ≤ 100 mA		20	50	mV
Peak output current	I _{OP3}		150	180		mA
Output short current	I _{OSC3}			40		mA
Output on control voltage	V _{ENL2}	V _{O3} : On			1.0	V
Output off control voltage	V _{ENH2}	V _{O3} : Off	4.0		V _{IN2}	V
Output low level voltage	V _{O3} OFF				0.2	V
Output noise voltage	V _{NO3}	10 Hz ≤ f ≤ 100 kHz		70		μVrms
Ripple rejection	Rrej3	f = 120 Hz, 11 V ≤ V _{IN2} ≤ 23 V		55		dB


Continued on next page.

LA5606N



Continued from preceding page.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Regulator 4 (V_{EN3} = low, V_{O4} : ON, V_{IN3} = 8.0 V, I_{O4} = 500 mA)						
Output voltage 4	V_{O4}		4.75	5.0	5.25	V
Dropout voltage	$V_{DROP4-1}$			0.3	0.5	V
	$V_{DROP4-2}$	I_{O4} = 250 mA		0.2	0.4	V
Line regulation	ΔV_{OLN4}	$6.25\text{ V} \leq V_{IN3} \leq 23\text{ V}$		20	100	mV
Load regulation	ΔV_{OLD4}	$5\text{ mA} \leq I_{O4} \leq 500\text{ mA}$		30	150	mV
Peak output current	I_{OP4}		500	900		mA
Output short current	I_{OSC4}			250		mA
Output on control voltage	V_{ENL3}	V_{O4} : On			1.0	V
Output off control voltage	V_{ENH3}	V_{O4} : Off	4.0		V_{IN3}	V
Output low level voltage	V_{O4} OFF				0.2	V
Output noise voltage	V_{NO4}	$10\text{ Hz} \leq f \leq 100\text{ kHz}$		70		μVrms
Ripple rejection	R_{rej4}	$f = 120\text{ Hz}$, $7\text{ V} \leq V_{IN3} \leq 23\text{ V}$		60		dB
Current dissipation 1	I_{Q1}	I_{O1} , I_{O2} , I_{O3} , I_{O4} = 0		11		mA
Current dissipation 2	I_{Q2}	I_{O1} = 300mA, I_{O2} = 150 mA, I_{O3} = 100mA, I_{O4} = 500 mA		53		mA

Pin Assignment

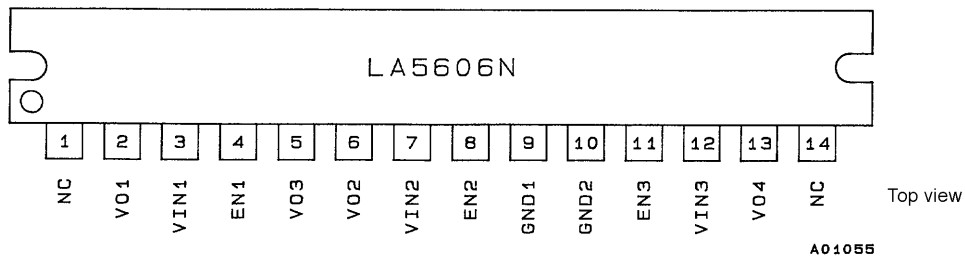


Note: The NC pins should not be used (No. 1 and No. 14 in the pin layout).

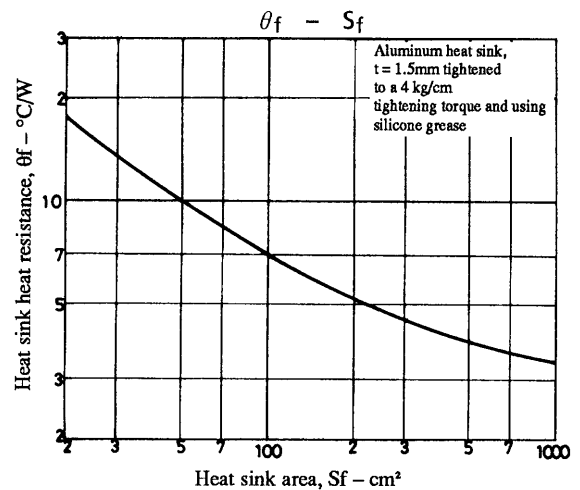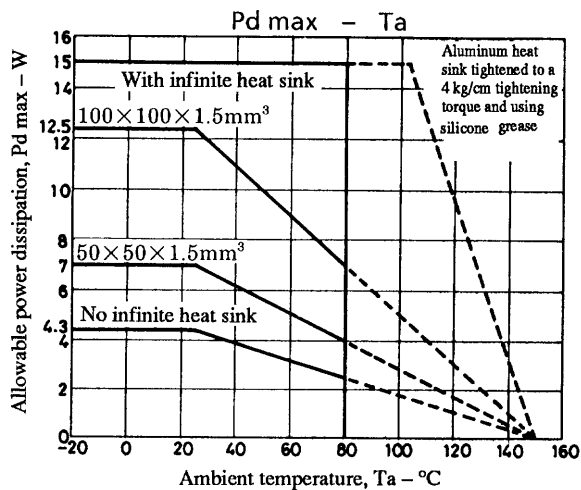



A01056

Test Circuit

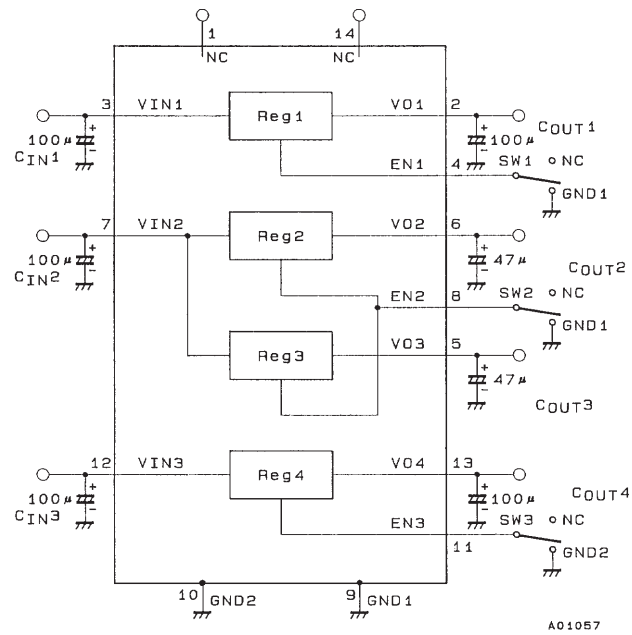

Unit (capacitance: F)



Function Table

The following table indicates conditions for operation with $V_{IN1} \geq V_{IN2} \geq V_{IN3}$ ($V_{IN1} \geq 11$ V, $V_{IN2} \geq 6$ V and $V_{IN3} \geq 4$ V).

EN1, EN2, EN3	V_{O1} , V_{O2}/V_{O3} , V_{O4}
H	L
L	H

1. Within the table of EN “H” indicates an H level and “L” indicates an L level.
2. In the table of V_O “H” indicates an output on voltage while “L” indicates an output off voltage.
3. All output voltages corresponding to all EN locations are controlled independently.
($EN1 \rightarrow V_{O1}$, $EN2 \rightarrow V_{O2}$ and V_{O3} , $EN3 \rightarrow V_{O4}$)
4. When EN is open, V_O is at the H level.

EN (On/Off Control) Input Equivalent Block Diagram

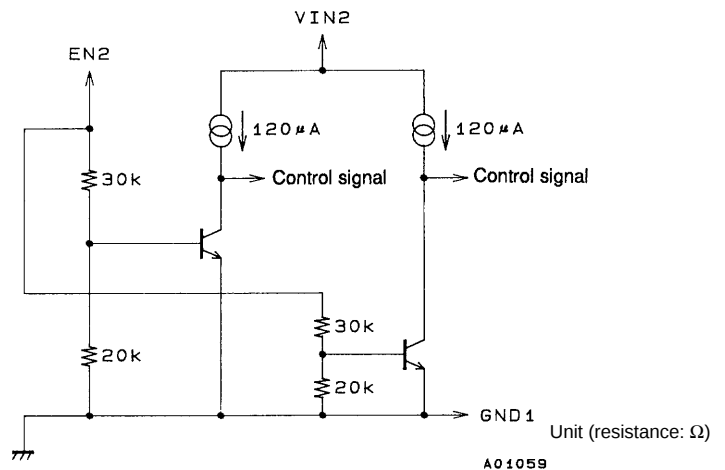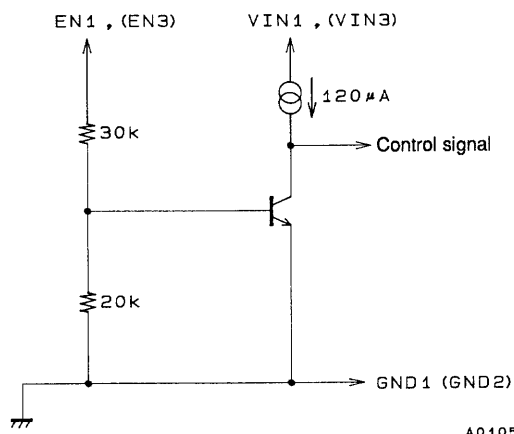 V_{O1} (V_{O4}) V_{O2} and V_{O3} 

Notes for Above Applications

1. GND1 and GND2 should be at the same electric potential; since these are connected to the substrate of the LA5606N, the lowest possible electric potential should be used. (If the electric potential of GND1 and GND2 differ, performance characteristics of the LA5606N can not be guaranteed.)
2. Rise and fall times for V_{IN1} , V_{IN2} and V_{IN3} should be unified and concerning these pins operating in an open-circuit state or connected to the ground state is forbidden.
3. When V_{IN1} and V_{IN2} are open or lower than the required value, V_{O1} to V_{O4} are forced off for the IC's protection.
4. Use output capacitors C_{OUT1} and C_{OUT4} rated at 100 μ F or more and C_{OUT2} and C_{OUT3} rated at 47 μ F or more. To prevent oscillation at low temperature, be sure to use less temperature sensitive capacitors.
5. In order to provide stable operation, C_{IN1} to C_{IN3} and C_{OUT1} to C_{OUT4} should be mounted as close to the LA5606N as possible.
6. The NC pins should not be used (No. 1 and No. 14 in the pin layout).
7. The output voltage of each voltage regulator is affected by a change in the load on the other voltage regulators.

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1998. Specifications and information herein are subject to change without notice.