



## SURFACE MOUNT SCHOTTKY BARRIER DIODE ARRAY

### LBAT54SDW1T1G

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

- Extremely Fast Switching Speed
- Low Forward Voltage — 0.35 Volts (Typ) @  $I_F = 10 \text{ mAdc}$
- We declare that the material of product compliance with RoHS requirements.



#### DEVICE MARKING AND ORDERING INFORMATION

| Device        | Marking | Shipping        |
|---------------|---------|-----------------|
| LBAT54SDW1T1G | LSW     | 3000/Tape&Reel  |
| LBAT54SDW1T3G | LSW     | 10000/Tape&Reel |

#### MAXIMUM RATINGS ( $T_J = 125^\circ\text{C}$ unless otherwise noted)

| Rating                                                                                     | Symbol    | Value       | Unit                       |
|--------------------------------------------------------------------------------------------|-----------|-------------|----------------------------|
| Reverse Voltage                                                                            | $V_R$     | 30          | Volts                      |
| Forward Power Dissipation<br>@ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$     | 200<br>2.0  | mW<br>mW/ $^\circ\text{C}$ |
| Forward Current (DC)                                                                       | $I_F$     | 200 Max     | mA                         |
| Junction Temperature                                                                       | $T_J$     | 125 Max     | $^\circ\text{C}$           |
| Storage Temperature Range                                                                  | $T_{stg}$ | -65 to +125 | $^\circ\text{C}$           |

#### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (EACH DIODE)

| Characteristic                                                                                        | Symbol      | Min | Typ  | Max  | Unit            |
|-------------------------------------------------------------------------------------------------------|-------------|-----|------|------|-----------------|
| Reverse Breakdown Voltage ( $I_R = 10 \mu\text{A}$ )                                                  | $V_{(BR)R}$ | 30  | —    | —    | Volts           |
| Total Capacitance ( $V_R = 1.0 \text{ V}$ , $f = 1.0 \text{ MHz}$ )                                   | $C_T$       | —   | 7.6  | 10   | pF              |
| Reverse Leakage ( $V_R = 25 \text{ V}$ )                                                              | $I_R$       | —   | 0.5  | 2.0  | $\mu\text{Adc}$ |
| Forward Voltage ( $I_F = 0.1 \text{ mAdc}$ )                                                          | $V_F$       | —   | 0.22 | 0.24 | Vdc             |
| Forward Voltage ( $I_F = 30 \text{ mAdc}$ )                                                           | $V_F$       | —   | 0.41 | 0.5  | Vdc             |
| Forward Voltage ( $I_F = 100 \text{ mAdc}$ )                                                          | $V_F$       | —   | 0.52 | 1.0  | Vdc             |
| Reverse Recovery Time<br>( $I_F = I_R = 10 \text{ mAdc}$ , $I_{R(REC)} = 1.0 \text{ mAdc}$ ) Figure 1 | $t_{rr}$    | —   | —    | 5.0  | ns              |
| Forward Voltage ( $I_F = 1.0 \text{ mAdc}$ )                                                          | $V_F$       | —   | 0.29 | 0.32 | Vdc             |
| Forward Voltage ( $I_F = 10 \text{ mAdc}$ )                                                           | $V_F$       | —   | 0.35 | 0.40 | Vdc             |
| Forward Current (DC)                                                                                  | $I_F$       | —   | —    | 200  | mAdc            |
| Repetitive Peak Forward Current                                                                       | $I_{FRM}$   | —   | —    | 300  | mAdc            |
| Non-Repetitive Peak Forward Current ( $t < 1.0 \text{ s}$ )                                           | $I_{FSM}$   | —   | —    | 600  | mAdc            |

## LBAT54SDW1T1G

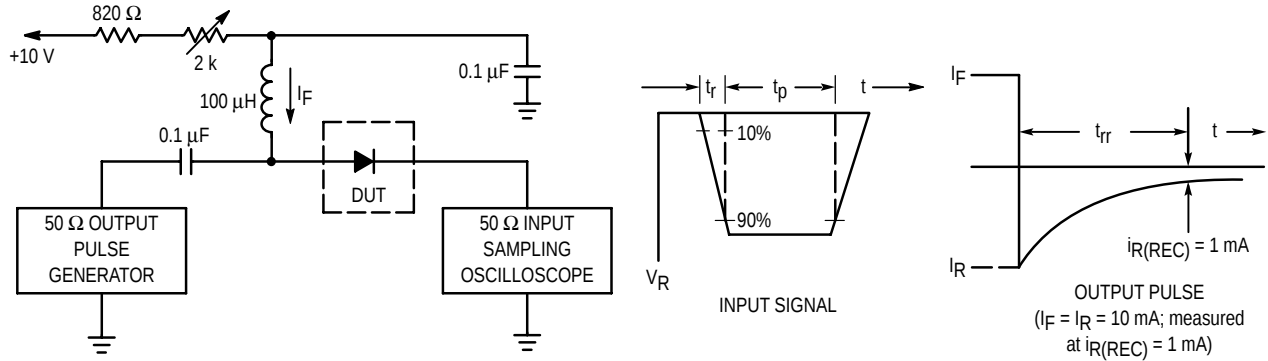


Figure 1. Recovery Time Equivalent Test Circuit

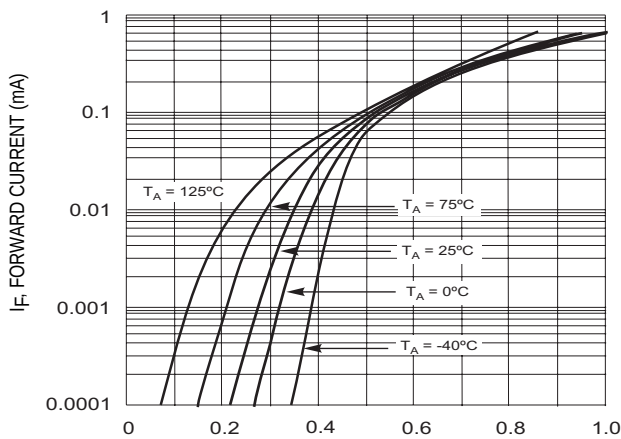


Figure 2. Forward Voltage

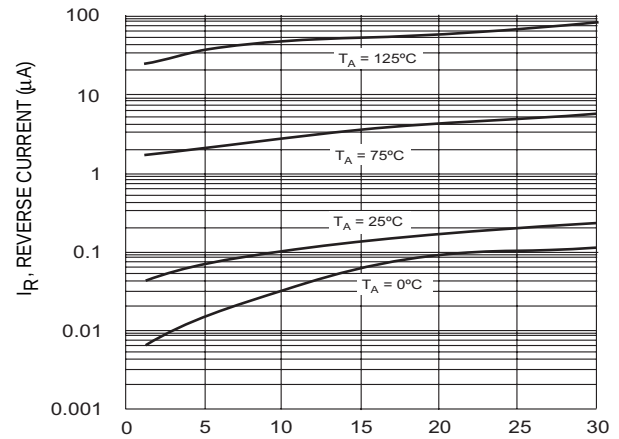


Figure 3. Leakage Current

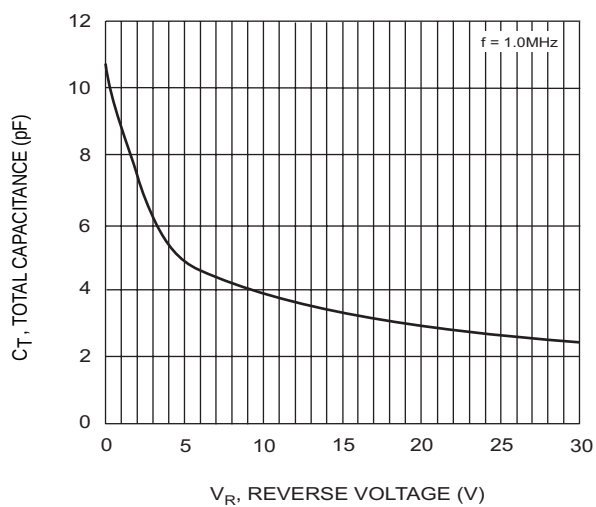


Figure 4. Total Capacitance

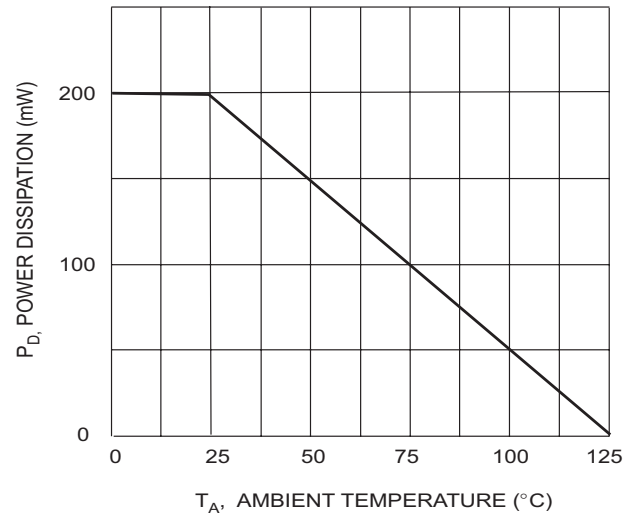




Fig. 4 Power Derating Curve

## LBAT54SDW1T1G

SC-88

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

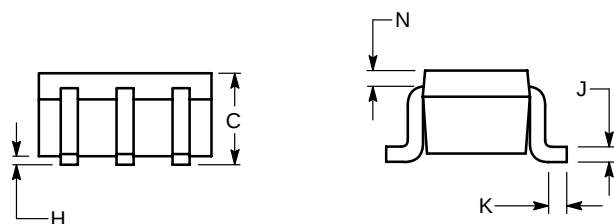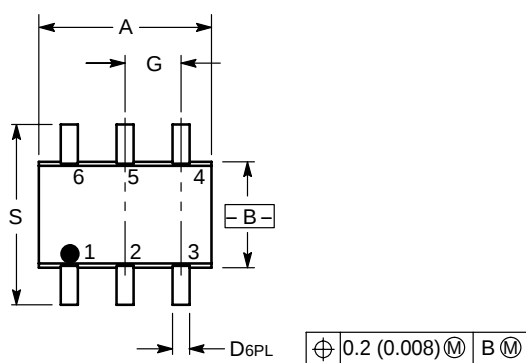

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.031     | 0.043 | 0.80        | 1.10 |
| D   | 0.004     | 0.012 | 0.10        | 0.30 |
| G   | 0.026 BSC |       | 0.65 BSC    |      |
| H   | ---       | 0.004 | ---         | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.004     | 0.012 | 0.10        | 0.30 |
| N   | 0.008 REF |       | 0.20 REF    |      |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |

- PIN 1. EMITTER 2  
 2. BASE 2  
 3. COLLECTOR 1  
 4. EMITTER 1  
 5. BASE 1  
 6. COLLECTOR 2

