

General Description



The MDS1652 uses advanced MagnaChip's MOSFET Technology, which provides high performance in on-state resistance, fast switching performance and excellent quality. Excellent low $R_{DS(ON)}$, low gate charge and operation for Battery Application.

Features

- $V_{DS} = 30V$
- $I_D = 17A$ @ $V_{GS} = 10V$
- $R_{DS(ON)} < 6.5m\Omega$ @ $V_{GS} = 10V$
- $R_{DS(ON)} < 9.5m\Omega$ @ $V_{GS} = 4.5V$

Applications

- Li-Ion Battery Application
- Portable Application
- Notebook PC Application

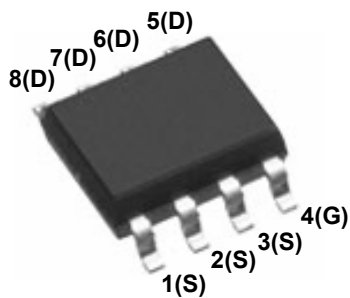

Absolute Maximum Ratings ($T_a = 25^\circ C$)

Characteristics		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	30	V
Gate-Source Voltage		V_{GSS}	± 20	V
Continuous Drain Current	$T_a = 25^\circ C$	I_D	17	A
	$T_a = 100^\circ C$		11	A
Pulsed Drain Current		I_{DM}	68	A
Power Dissipation ⁽¹⁾	$T_a = 25^\circ C$	P_D	3.1	W
	$T_a = 100^\circ C$		1.2	W
Single Pulse Avalanche Energy ⁽²⁾		E_{AS}	100	mJ
Junction and Storage Temperature Range		T_J, T_{stg}	-55~150	$^\circ C$

Thermal Characteristics

Characteristics	Symbol	Rating	Unit
Thermal Resistance, Junction-to-Ambient ⁽¹⁾	$R_{\theta JA}$	40	$^\circ C/W$
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	24	

Ordering Information

Part Number	Temp. Range	Package	Packing	RoHS Status
MDS1652RP	-55~150°C	SOIC-8	Tape & Reel	Pb Free
MDS1652RH	-55~150°C	SOIC-8	Tape & Reel	Halogen Free

Electrical Characteristics (Ta =25°C)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D = 250\mu A, V_{GS} = 0V$	30	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.0	1.8	3.0	
Drain Cut-Off Current	I_{DSS}	$V_{DS} = 24V, V_{GS} = 0V$	-	-	1	μA
Gate Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	-	± 100	nA
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 15A$	-	5.1	6.5	m Ω
		$V_{GS} = 4.5V, I_D = 12A$	-	6.7	9.5	
Forward Transconductance	g_{fs}	$V_{DS} = 5V, I_D = 15A$	-	30	-	S
Dynamic Characteristics						
Total Gate Charge	$Q_{g(10V)}$	$V_{DS} = 24V, I_D = 15A, V_{GS} = 10V$	-	50.0	-	nC
Gate-Source Charge	Q_{gs}		-	4.2	-	
Gate-Drain Charge	Q_{gd}		-	15.0	-	
Input Capacitance	C_{iss}	$V_{DS} = 10V, V_{GS} = 0V, f = 1.0MHz$	-	2220	-	pF
Reverse Transfer Capacitance	C_{rss}		-	400	-	
Output Capacitance	C_{oss}		-	581	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{GS} = 10V, V_{DD} = 15V, I_D = 6.5A, R_G = 4.7\Omega$	-	12.5	-	ns
Rise Time	t_r		-	22.0	-	
Turn-Off Delay Time	$t_{d(off)}$		-	77.5	-	
Fall Time	t_f		-	72.0	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V_{SD}	$I_S = 15A, V_{GS} = 0V$	-	0.78	1.0	V

Note :

1. Surface mounted RF4 board with 2oz. Copper.
2. Starting $T_J = 25^\circ C$, $L = 1mH$, $I_{AS} = 14A$, $V_{DD} = 15V$, $V_{GS} = 10V$.

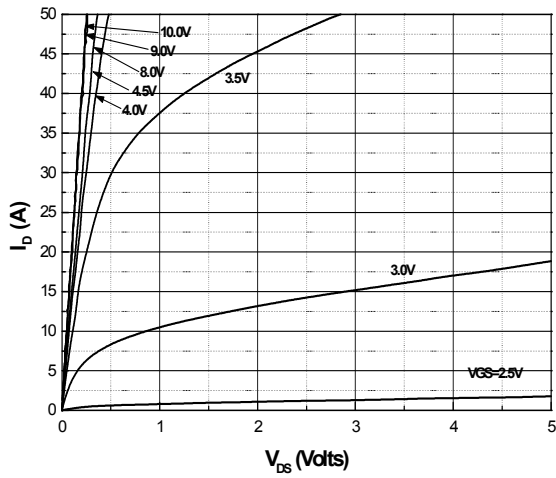


Fig.1 On-Region Characteristics

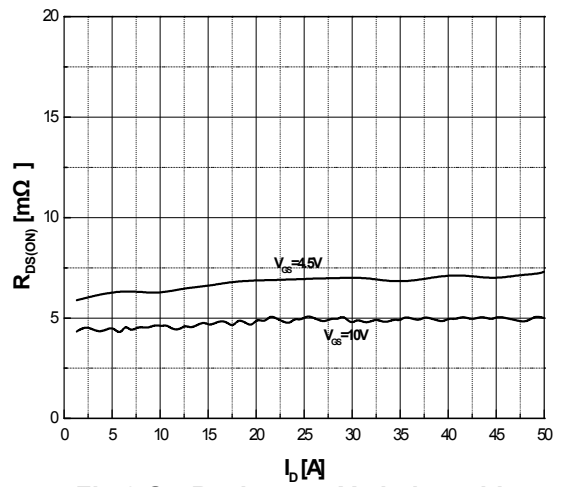


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

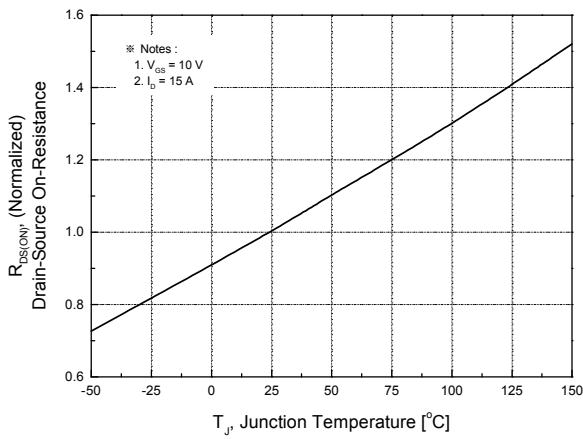


Fig.3 On-Resistance Variation with Temperature

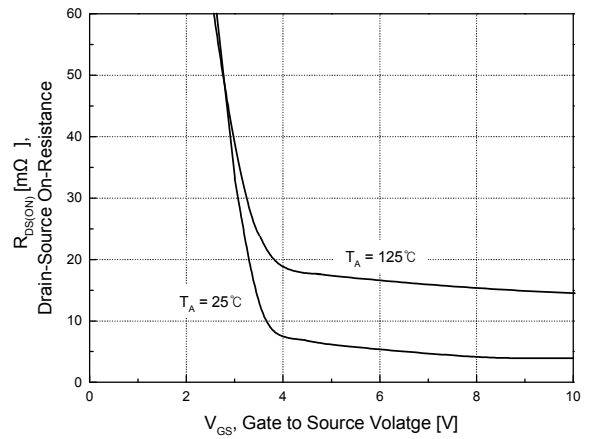


Fig.4 On-Resistance Variation with Gate to Source Voltage

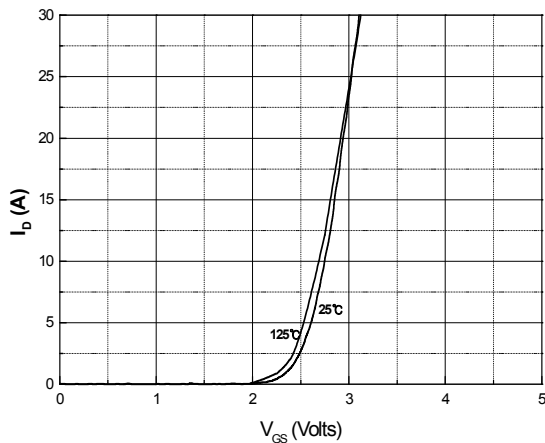


Fig.5 Transfer Characteristics






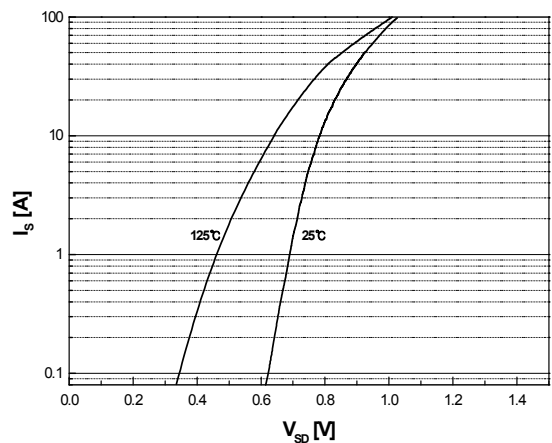



Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature

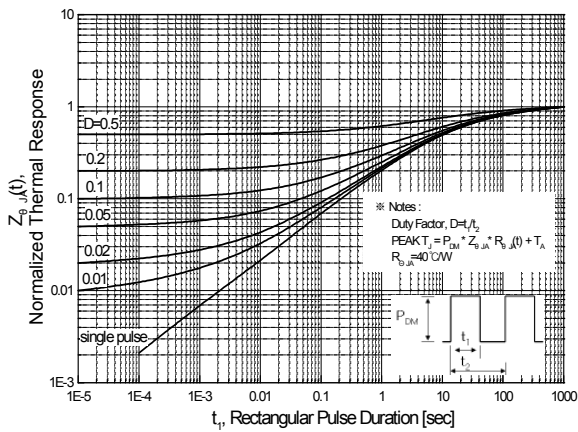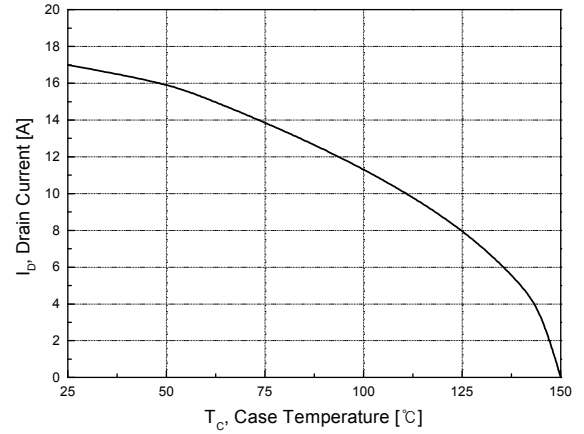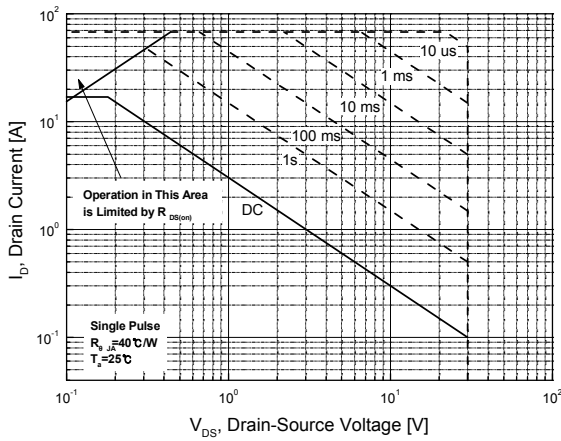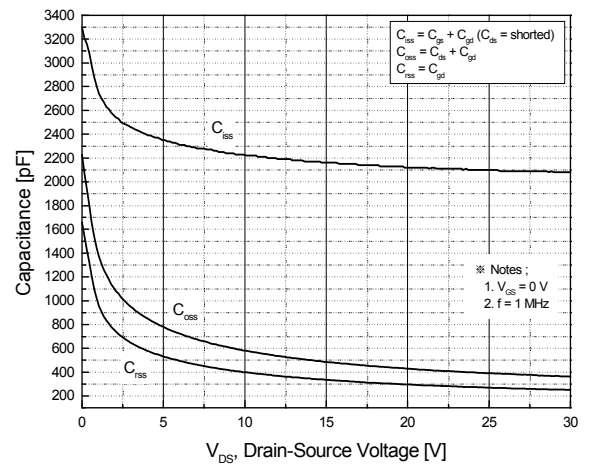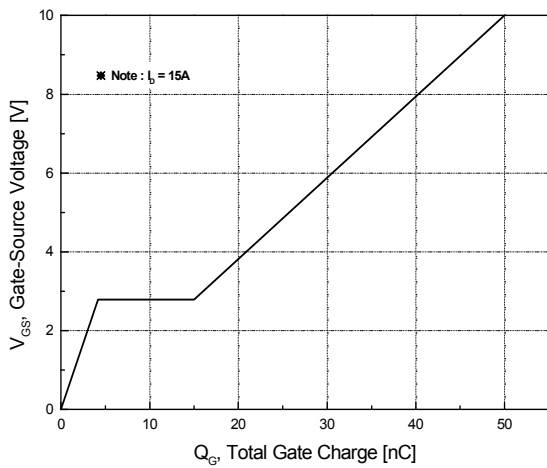


Physical Dimensions

8 Leads, SOIC

Dimensions are in millimeters unless otherwise specified

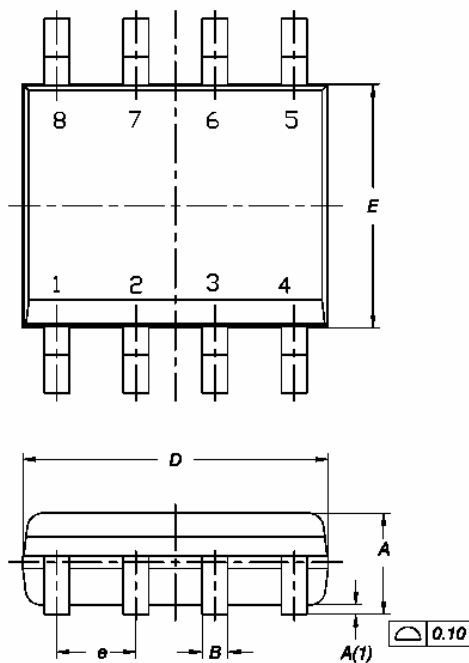

DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	1.35	1.55	1.75
A(1)	0.10	0.175	0.25
B	0.38	0.445	0.51
C	0.19	0.22	0.25
D	4.80	4.90	5.00
E	3.80	3.90	4.00
e	1.27 BSC		
H	5.80	6.00	6.20
L	0.50	0.715	0.93
α	0°	4°	8°
h	0.25	0.375	0.50

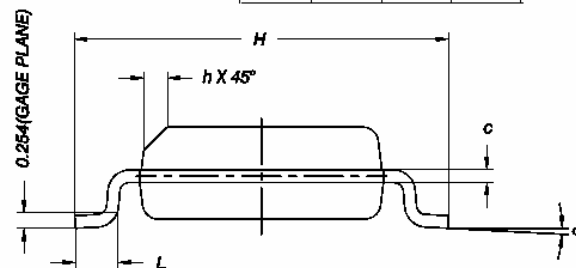

Worldwide Sales Support Locations

U.S.A

Sunnyvale Office

787 N. Mary Ave. Sunnyvale

CA 94085 U.S.A

Tel : 1-408-636-5200

Fax : 1-408-213-2450

E-Mail : americasales@magnachip.com

Chicago Office

2300 Barrington Road, Suite 330

Hoffman Estates, IL 60195 U.S.A

Tel : 1-847-882-0951

Fax : 1-847-882-0998

U.K

Knyvett House The Causeway,

Staines Middx, TW18 3BA, U.K.

Tel : +44 (0) 1784-898-8000

Fax : +44 (0) 1784-895-115

E-Mail : europesales@magnachip.com

Japan

Tokyo Office

Shinbashi 2-chome MT bldg

4F 2-5-5 Shinbashi, Minato-ku

Tokyo, 105-0004 Japan

Tel : 81-3-3595-0632

Fax : 81-3-3595-0671

E-Mail : japansales@magnachip.com

Osaka Office

3F, Shin-Osaka MT-2 Bldg

3-5-36 Miyahara Yodogawa-Ku

Osaka, 532-0003 Japan

Tel : 81-6-6394-8224

Fax : 81-6-6394-8282

E-Mail : osakasales@magnachip.com

Taiwan R.O.C

2F, No.61, Chowize Street, Nei Hu

Taipei, 114 Taiwan R.O.C

Tel : 886-2-2657-7898

Fax : 886-2-2657-8751

E-Mail : taiwansales@magnachip.com

China

Hong Kong Office

Office 03, 42/F, Office Tower Convention Plaza

1 Harbour Road, Wanchai, Hong Kong

Tel : 852-2828-9700

Fax : 852-2802-8183

E-Mail : chinasales@magnachip.com

Shenzhen Office

Room 1803, 18/F

International Chamber of Commerce Tower

Fuhua 3 Road, Futian District

ShenZhen, China

Tel : 86-755-8831-5561

Fax : 86-755-8831-5565

Shanghai Office

Ste 1902, 1 Huaihai Rd. (C) 20021

Shanghai, China

Tel : 86-21-6373-5181

Fax : 86-21-6373-6640

Korea

891, Daechi-Dong, Kangnam-Gu

Seoul, 135-738 Korea

Tel : 82-2-6903-3451

Fax : 82-2-6903-3668 ~9

Email : koreasales@magnachip.com

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

MagnaChip reserves the right to change the specifications and circuitry without notice at any time. MagnaChip does not consider responsibility for use of any circuitry other than circuitry entirely included in a MagnaChip product.  is a registered trademark of MagnaChip Semiconductor Ltd.