## **Pin Diode Switch Element**

For further information and support please visit: https://www.macom.com/support

## Features

- High Power Handling 150 W @ 1.5 GHz or less
- Low Insertion Loss:
  - 0.15 dB @ 1.0 GHz
  - 0.20 dB @ 2.0 GHz
- Medium Isolation: 10 dB @ 1.0 GHz
- RoHS\* Compliant

## Description

The MEST2G-150-10-CM32 is a thermal to ground series diode switch element (EST2G) in an Aluminum Nitride package. This part is designed for a reliable high power switch application up to 150 watts. Usable up to 2.0 GHz.

## Electrical Specifications: T<sub>c</sub> = +25°C (unless otherwise specified)

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Breakdown Voltage (V <sub>BR</sub> )	I <sub>R</sub> = 10 μA	V	500		_
Leakage Current (I <sub>R</sub> )	V <sub>R</sub> = 100 V	nA		80	250
Forward Voltage (V <sub>F</sub> )	I <sub>F</sub> = 100 mA	V		900	_
Series Resistance (R <sub>s</sub> )	I <sub>F</sub> = 100 mA, 100 MHZ	Ω	_	0.22	—
Resistance (R <sub>LIM</sub> )	Spice Model	Ω	_	0.20	—
Total Capacitance (C <sub>T</sub> )	V <sub>R</sub> = 50 V, 1 MHz	pF	_	0.50	—
Junction Capacitance (C <sub>J</sub> )	Spice Model	pF		0.41	_
Lifetime (t)	I <sub>F</sub> = 10 mA, I <sub>R</sub> = 6 mA, 50%	ns		3000	_
I-Region (w)	I-Layer	μm		80	_
Input / Output Return Loss (I/ORL)	I <sub>F</sub> = 100 mA, 1.0 GHz I <sub>F</sub> = 100 mA, 2.0 GHz	dB	15 25	20 30	_
Insertion Loss (I <sub>L</sub> )	I <sub>F</sub> = 100 mA, 1.0 GHz I <sub>F</sub> = 100 mA, 2.0 GHz	dB	_	0.12 0.14	0.20 0.20
Isolation (I <sub>so</sub> )	V <sub>R</sub> = 10 V, 1.0 GHz V <sub>R</sub> = 10 V, 2.0 GHz	dB	10	12 7	_

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

1



(CM32) non-hermetic



Rev. V1



## **Pin Diode Switch Element**

### Absolute Maximum Ratings<sup>1,2</sup>

Parameter	Absolute Maximum		
Breakdown Voltage (V <sub>R</sub> )	500 V		
Forward Current (I <sub>FDC</sub> )	500 mA		
Thermal Resistance ( $\theta_{JC}$ )	25°C/W		
Junction Temperature (T <sub>J</sub> )	-40°C to 175°C		
Storage Temperature (T <sub>STG</sub> )	-55°C to +150°C		
Mounting Temperature (T <sub>MTG</sub> )	+260°C per JEDEC STD-J-20C		

1. Exceeding any one or combination of these limits may cause permanent damage to this device.

2. MACOM does not recommend sustained operation near these survivability limits.


### **Handling Procedures**

Please observe the following precautions to avoid damage:


### **Static Sensitivity**

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 0 (HBM) devices.


## Typical Performance Curves: $T_A = 25^{\circ}C$ , $Z_O = 50 \Omega$ , -10 dBm Small Signal



Isolation



#### Input Return Loss



2


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

#### Rev. V1




## **Pin Diode Switch Element**

Rev. V1

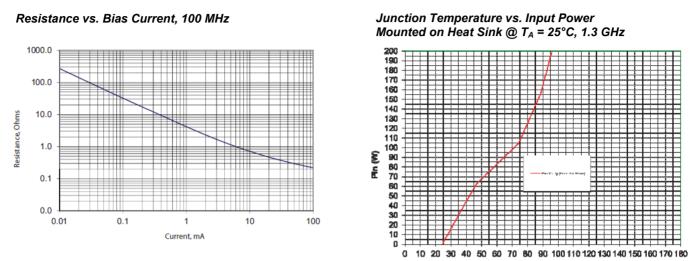

Junction Temperature (°C)

### **PCB** Layout

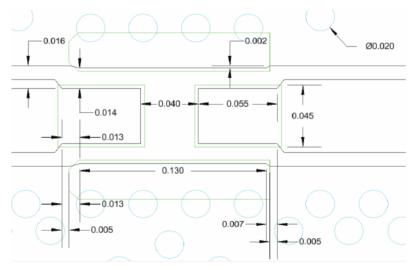

Plated through, filled and plated over vias

Solder mask should provide 60um clearance between copper pad and solder mask. Rounded pkg pads should have matching rounded solder mask openings.

Use circles or squares for the thermal land stencil design such that only get 60 to 80% solder paste coverage.


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.



## **Pin Diode Switch Element**

Rev. V1

## Outline (CM32)

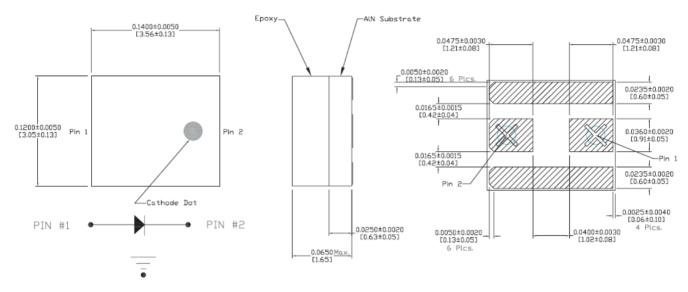

Pin function for Silicon PIN diode. 1. Anode 2. Cathode

#### Notes:

- 1. Metallization: 250-350  $\mu^{\prime\prime}$  Cu / 60-100  $\mu^{\prime\prime}$  Ni / 15-45  $\mu^{\prime\prime}$  Au
- 2. Dimensions in mils [mm]

### **Pin Diode Switch Element**

Rev. V1

МАСОМ

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

<sup>5</sup> 

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.