

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- General purpose switching and amplification.

CLASSIFICATION OF h_{FE}


Product-Rank	2SC1923-O	2SC1923-Y
Range	70~140	100~200

MARKING


h_{FE} Rank	C1923 O 031
---------------	----------------

h_{FE} Rank	C1923 Y 031
---------------	----------------

TO-92

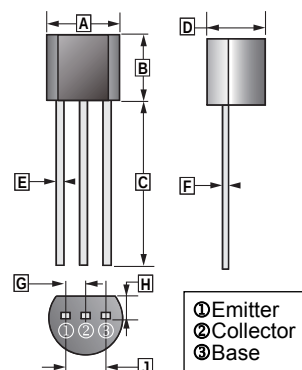

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.40	4.70	F	0.30	0.51
B	4.30	4.70	G	1.27 TYP.	
C	12.70	-	H	1.10	1.40
D	3.30	3.81	J	2.42	2.66
E	0.36	0.56	K	0.36	0.76



ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	4	V
Collector Current - Continuous	I_C	20	mA
Collector Power Dissipation	P_C	100	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	1250	$^\circ\text{C} / \text{W}$
Junction, Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	40	-	-	V	$I_C=0.1\text{mA}, I_E=0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	30	-	-	V	$I_C=1\text{mA}, I_B=0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	4	-	-	V	$I_E=0.1\text{mA}, I_C=0$
Collector Cut – Off Current	I_{CBO}	-	-	0.5	μA	$V_{CB}=18\text{V}, I_E=0$
Emitter Cut – Off Current	I_{EBO}	-	-	0.5	μA	$V_{EB}=4\text{V}, I_C=0$
DC Current Gain	h_{FE}	70	-	200		$V_{CE}=6\text{V}, I_C=1\text{mA}$
Transition Frequency	f_T	-	550	-	MHz	$V_{CE}=6\text{V}, I_C=1\text{mA}$