

Type	Silicon MOSFET type Integrated Circuit		
Application	For Switching Power Supply Control		
Structure	CMOS type		
Equivalent Circuit	Figure. 7		
Package	TO-220-A2	Marking	MIP2L3MY

A. ABSOLUTE MAXIMUM RATINGS (Ta=25°C±3°C)

NO.	Item	Symbol	Ratings	Unit	Note
1	DRAIN Voltage	VD	-0.3 ~ 700	V	※1: It is guaranteed within the pulse as below. Leading Edge Blanking Pulse + Current Limit Delay ton(BLK)+td(OCL)
2	CONTROL Voltage	VC	-0.3 ~ 8	V	
3	Output Peak Current	IDP	1.9(※1)	A	
4	Recommended Operating Temperature	Tj	-30 ~ +125	°C	
5	Channel Temperature	Tch	-30 ~ +150	°C	
6	Storage Temperature	Tstg	-55 ~ +150	°C	

B. ELECTRICAL CHARACTERISTICS Measure condition (TC=25°C±3°C)

No.	Item	Symbol	Measure Condition (Refer Fig. 1)	Typ.	Min.	Max.	Unit
-----	------	--------	-------------------------------------	------	------	------	------

【CONTROL FUNCTIONS/ * Design Guarantee Item】

1	Output Frequency	fosc	VC=VC(CNT)-0.2V, VD=5 V	100	92	108	kHz
2	Jitter Frequency Deviation	Δf	VC=VC(CNT)-0.2V, VD=5 V	5.5			kHz
*3	Jitter Frequency Modulation Rate	fM	VC=VC(CNT)-0.2V, VD=5 V	270			Hz
4	Maximum Duty Cycle	MAXDC	VC=VC(CNT)-0.2V, VD=5 V	53	50	56	%
*5	PWM Gain	GPWM	VC=VC(CNT)	12.5			dB
6	Before Auto-restart Current	IC(SB)1	VC<VC(ON), VD=5 V	0.5	0.2	0.8	mA
7	After Off-state Current	IC(SB)2	VC>VC(CNT), VD=5 V	0.5	0.2	0.8	mA
8	Operating Current	IC(OP)	VC=VC(CNT) -0.2V, VD=5 V	0.6	0.2	1.0	mA
9	Auto-restart Threshold Voltage	VC(ON)	VD=5 V	6.25	5.75	6.75	V
10	UV Lockout Threshold Voltage	VC(OFF)	VD=5 V	4.8	4.35	5.25	V
11	Auto-restart maintain Voltage	VC_m	S1=OPEN	5.45	4.95	5.95	V
12	Auto-restart maintain Time	Tm	S1=OPEN	45			ms
13	Auto-restart hysteresis Voltage	ΔVC	VC(ON)-VC(OFF)	1.45	1.05	1.85	V
14	Control Clamp Voltage	VC(CLP)	IC=3mA	6.8	6.2	7.4	V
15	Auto-restart duty cycle	TSW/TTIM	※Figure 5 S1=OPEN	12			%
16	Auto-restart frequency	fTIM	※Figure 5 S1=OPEN	2.6			Hz
17	Control Pin Charging Current	IC(CHG)1	VC=0V, VD=50 V	-8.3	-13.1	-5.6	mA
		IC(CHG)2	VC=5V, VD=50 V	-5	-9.8	-2.1	mA
18	Control Pin Voltage	VC(CNT)	VD=5 V	5.9	5.3	6.5	V
*19	Control Pin Voltage hysteresis	$\Delta VC(CNT)$	VD=5 V	10			mV

B. ELECTRICAL CHARACTERISTICS Measure condition (TC=25°C±3°C)

No.	Item	Symbol	Measure Condition (Refer Fig. 1)	Typ.	Min.	Max.	Unit
-----	------	--------	-------------------------------------	------	------	------	------

【CIRCUIT PROTECTIONS: / * Design Guarantee Item】

20	Self Protection Current Limit	ILIMIT	※Figure 2/Figure 3 DUTY=30%	0.8	0.73	0.87	A
21	ILIMIT modified coefficient	R_slope	※Figure 2/Figure 3 VC=VC(CNT)-0.2 V	30			mA/μS
*22	Leading Edge Blanking Delay	ton(BLK)		300	240	360	ns
*23	Current Limit Delay	td(OCL)		210	140	280	ns
*24	Thermal Shutdown Temperature	TOTP		140	130	150	°C
*25	Thermal Shutdown Temperature Hysteresis	ΔTOTP		70			°C


【OUTPUT / * Design Guarantee Item】

*26	Power-up Reset Threshold Voltage	VCreset		2.6	1.8	3.5	V
27	ON-State Resistance	RDS(ON)	ID=0.3 A	8		10	Ω
28	OFF-State Current	IDSS	VD=650V, VC=6.5 V	10		20	μA
29	Breakdown Voltage	VDSS	ID=100 μA, VC=6.5 V		700		V
30	Rise Time	tr	※Figure4 VC=VC(CNT)-0.2V, VD=5 V	140			ns
31	Fall Time	tf	※Figure4 VC=VC(CNT)-0.2V, VD=5 V	30			ns

【SUPPLY】

32	Drain Supply Voltage	VD(MIN)	S1=OPEN		36		V
----	----------------------	---------	---------	--	----	--	---

【Figure 1: Measure Circuit】

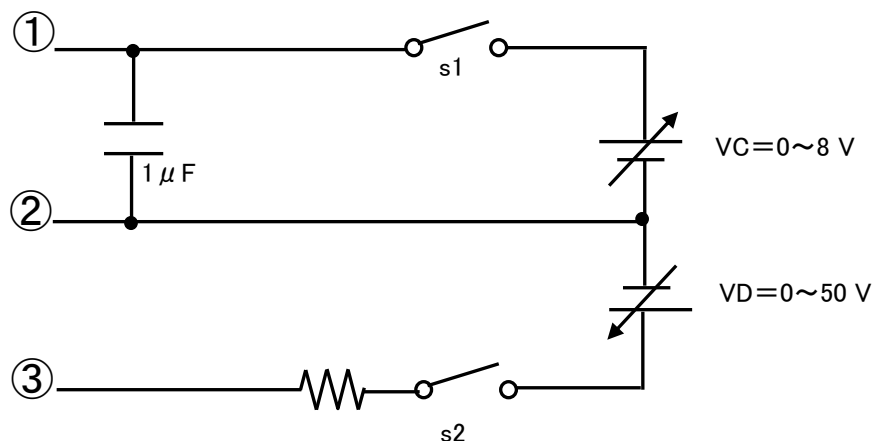


* This measurement circuit can't be useful for ILIMIT measurement

Terminal explanation

- ① : CONTROL
- ② : SOURCE
- ③ : DRAIN


【Figure. 2: Measure Circuit】

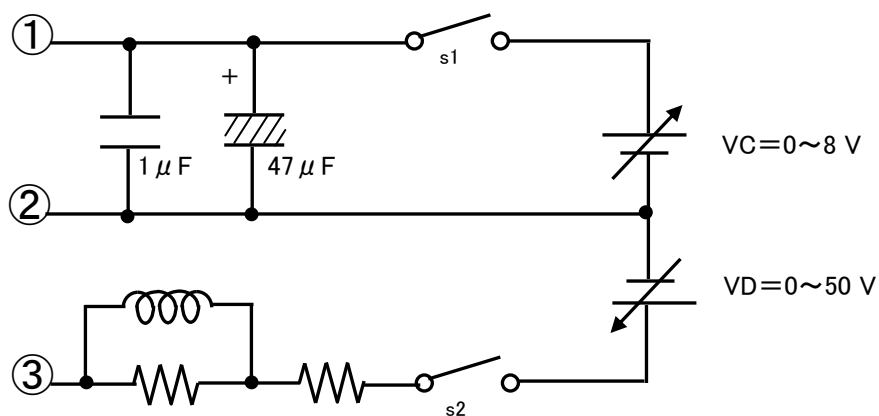

Terminal explanation


- ① : CONTROL
- ② : SOURCE
- ③ : DRAIN

【Figure. 3: ILIMIT Measurement】

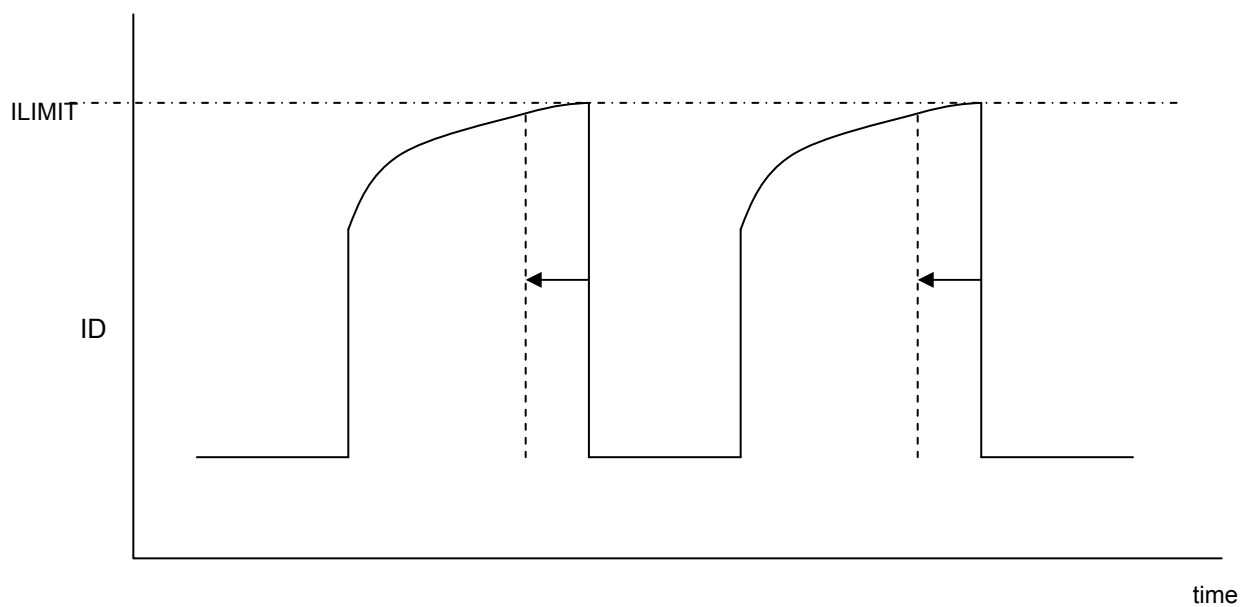


$$R_{\text{slope}} = \{(\text{ILIMIT at Duty}=30\%) - (\text{ILIMIT at Duty}=20\%) \} / \{(\text{Ton at Duty}=30\%) - (\text{Ton at Duty}=20\%) \}$$


【Figure. 4 : tr, tf Measurement】

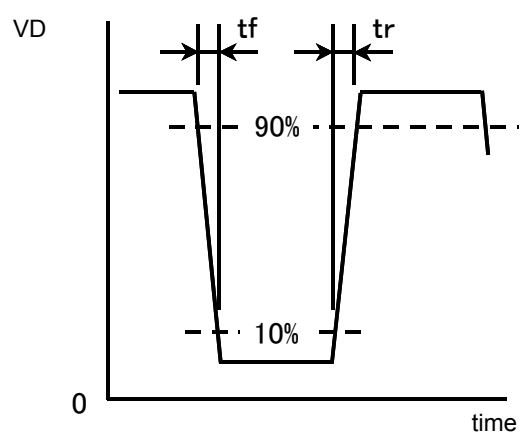


【Figure. 5 : VC_m, Tm, TTSW, TTIM, FTIM Measurement】

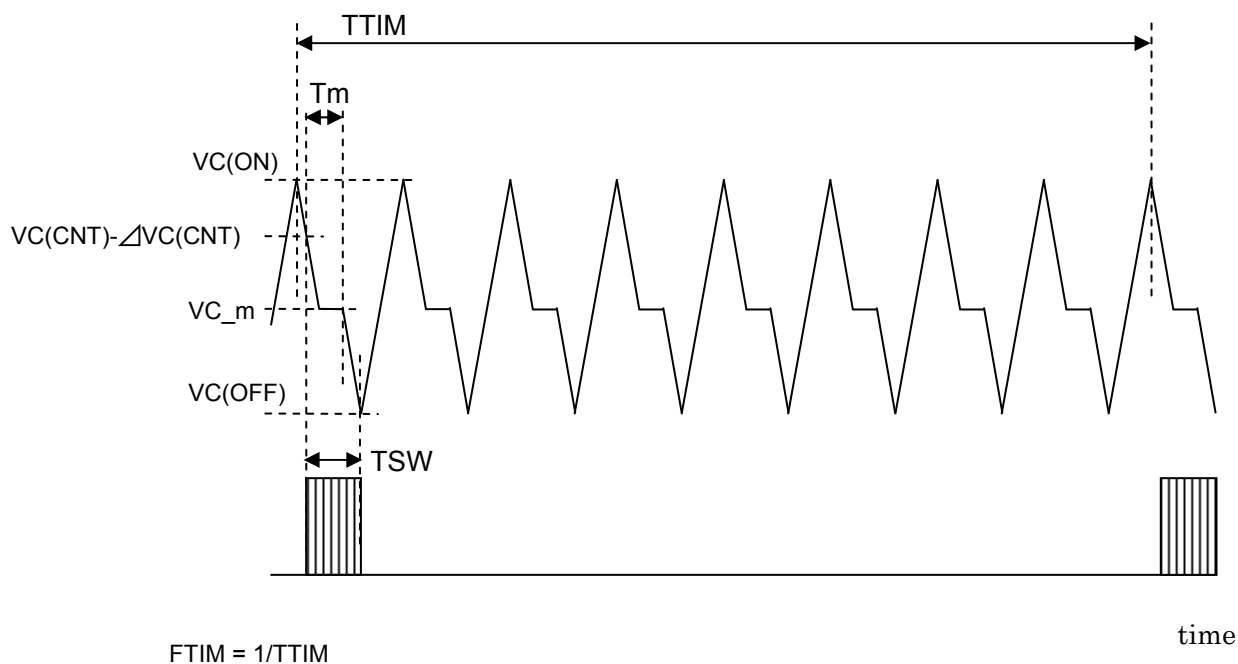


【Figure. 6 : Δf, fM Measurement】

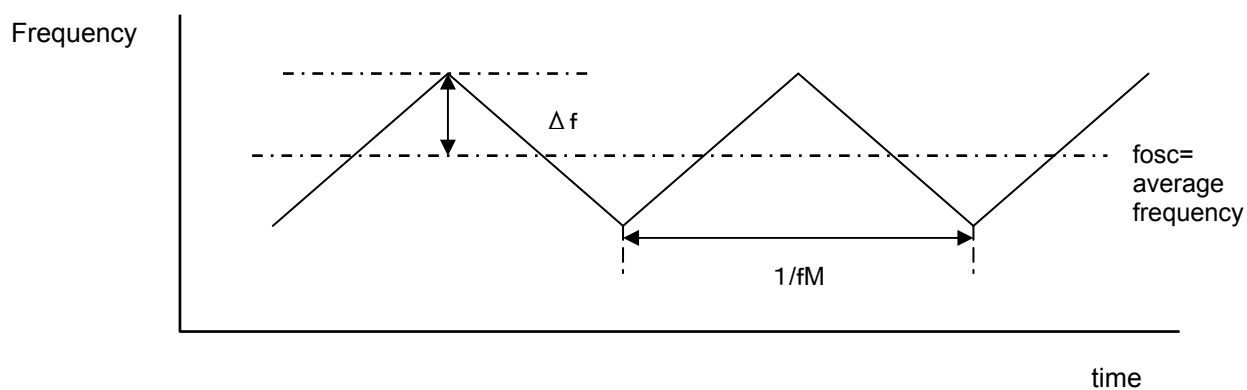

【Figure. 7: Block Diagram】

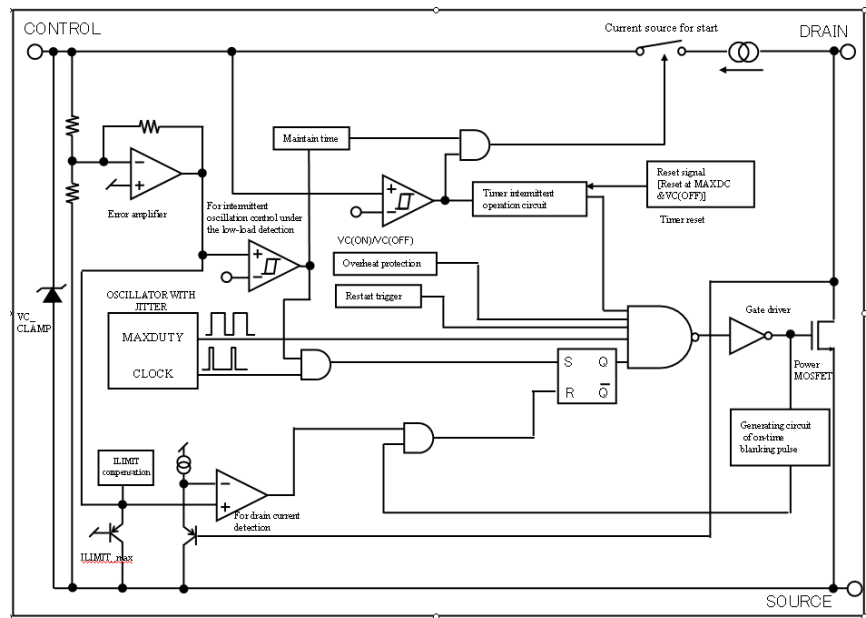

【Figure. 8: Pin Layout】

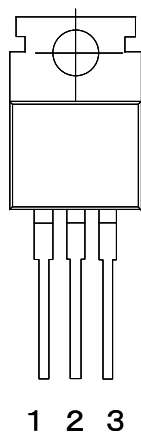

Pin No.	Terminal Name
1	CONTROL
2	SOURCE
3	DRAIN

【Precautions for Use 1】

Connect a Ceramic Capacitor (over 0.1 μ F) between CONTROL and SOURCE.

【Precautions for Use 2】

The IPD has risks for break-down or burst or giving off smoke in following conditions. Avoid the following use.
Fuse should be added at the input side or connect zener diode between control pin and GND, etc as a countermeasure to pass regulatory Safety Standard. Concrete countermeasure could be provided individually. However, customer should make the final judgment.

- (1) Reverse the DRAIN pin and SOURCE pin connection to the power supply board.
- (2) DRAIN pin short to CONTROL pin.
- (3) DRAIN pin short to SOURCE pin.

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

Precautions on the Sales of IPDs

- 1) The sale and/or the export of IPD products to customers located in certain countries is restricted by the Agreement made and executed by and between Power Integrations, Inc. and Panasonic Corporation. For details, refer to the following Attached table "IPD availability by customer."
- 2) IPD products purchased from our company, or its authorized agents, hereinafter referred to as our company, shall be used only for production purposes by those parties who have duly purchased IPD products. Those who have purchased IPD products shall not use such IPD products in unmodified form for re-sale, loan, or sample shipment for evaluation purposes to any other parties.
- 3) If a party who has duly purchased IPD products subcontracts its production to any other parties, including its subsidiaries or any other third parties inside and/or out of Japan, and the IPD products are consigned to such subcontracting parties thereat, such party is obligated to monitor and control the quantity of IPD products to prevent any of the aforementioned re-sale, loan or sample shipments from taking place.
- 4) In the event that any actual or threatened breach or violation of any of the above mentioned 2) or 3) has occurred or is about to occur, our company will hold all shipments of IPD products and may request the customer to disclose necessary documentation describing the status of our end-users and/or distribution channels.

Note) The products of MIP50**, MIP51**, and MIP7** are excluded from above-mentioned precautions, 1) to 3).

Attached table "IPD availability by customer"

Parts No.			Companies/areas to which products can be sold	Companies/areas to which products cannot be sold	Application
MIP01** MIP2** MIP9A**	MIP02** MIP3** MIP9L**	MIP1** MIP4**	<ul style="list-style-type: none"> · Japanese companies in Japan · Japanese companies in Asia (50% or more owned) 	<ul style="list-style-type: none"> · Companies in European and American countries · Asian companies in Asia · Other local companies 	<ul style="list-style-type: none"> · For power supply · For DC-DC converter
MIP00** MIP55** MIP803/804	MIP52** MIP56** MIP816/826	MIP53** MIP5S** MIP9E**	<ul style="list-style-type: none"> · Japanese companies in Japan · Japanese companies in Asia (50% or more owned) · Asian companies in Asia 	<ul style="list-style-type: none"> · Companies in European and American countries · Other local companies 	<ul style="list-style-type: none"> · For power supply · For EL driver · For LED lighting driver
MIP50**	MIP51**	MIP7**	<ul style="list-style-type: none"> · No restrictions in terms of contract 	<ul style="list-style-type: none"> · No restrictions in terms of contract 	<ul style="list-style-type: none"> · For lamp driver/ car electronics accessories

Note) For details, contact our sales division.