



DESCRIPTION

The 2SC2412KQ~2SC2412KS are available in SOT-23 package

FEATURES

- Available in SOT-23 package


ORDERING INFORMATION

Package Type	Part Number
SOT-23	2SC2412KX
Note	X = Q, R, S See below hFE Classification Table SPQ: 3,000pcs/Reel
AiT provides all RoHS Compliant Products	

hFE CLASSIFICATION

Classification	Q	R	S
hFE	120~270	180~390	270~560

PIN DESCRIPTION

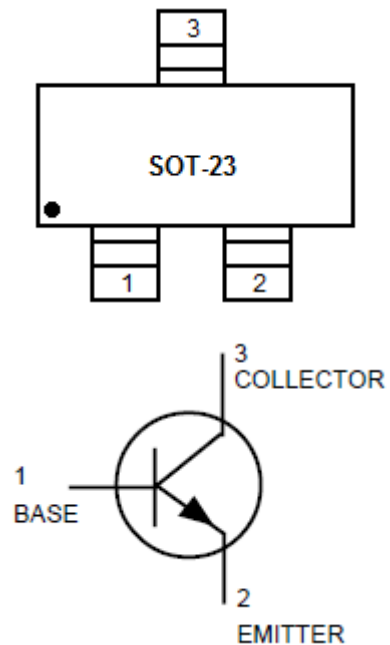



ABSOLUTE MAXIMUM RATINGS

V _{CEO} , Collector-Emitter Voltage	50V
V _{CBO} , Collector-Base Voltage	60V
V _{EBO} , Emitter-Base Voltage	7.0V
I _C , Collector Current-Continuous	150mA _{dc}
P _C , Collector Power Dissipation	0.2W
T _J , Junction Temperature	150°C
T _{STG} , Storage Temperature	-55°C ~ +150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS


T_A = 25°C, unless otherwise noted.

Parameter	Symbol	Characteristic		Min.	Typ.	Max.	Unit
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =1mA		50	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =50μA		7	-	-	V
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C =50μA		60	-	-	V
Collector Cutoff Current	I _{CBO}	V _{CB} =60V		-	-	0.1	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} =7V		-	-	0.1	μA
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C /I _B =50mA/5mA		-	-	0.4	V
DC Current Transfer Ratio	h _{FE}	V _{CE} =6V, I _C =1mA	Q	120	-	270	-
			R	180	-	390	
			S	270	-	560	
Transition Frequency	f _T	V _{CB} =12V, I _E =-2mA, f=30MHz		-	180	-	MHz
Output Capacitance	C _{ob}	V _{CB} =12V, I _E =0A, f=1MHz		-	2.0	3.5	pF




TYPICAL CHARACTERISTICS


1. Grounded emitter propagation characteristics

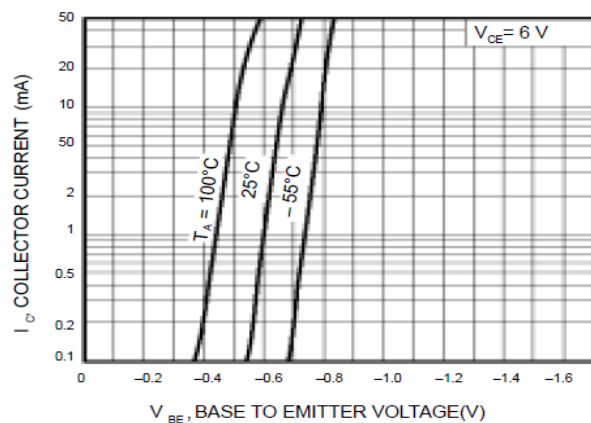


2. Grounded emitter output characteristics(I)

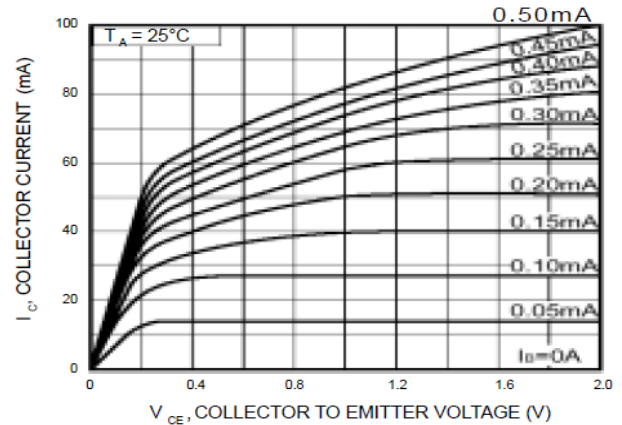


3. Grounded emitter output characteristics(II)

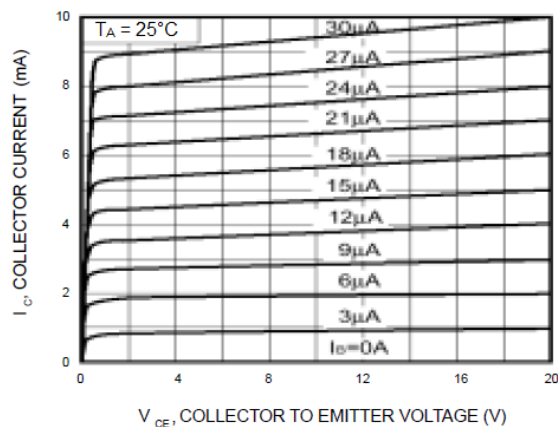


4. DC current gain vs. collector current (I)

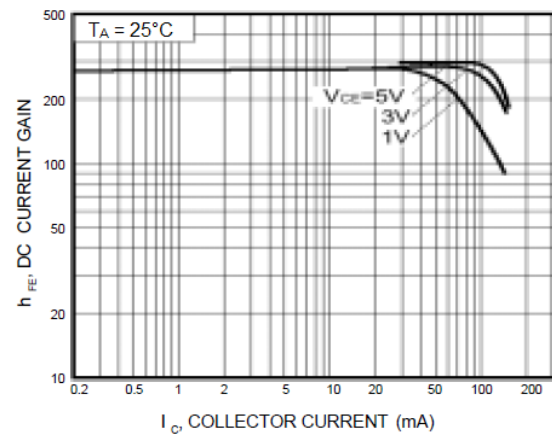

5. DC current gain vs. collector current (II)

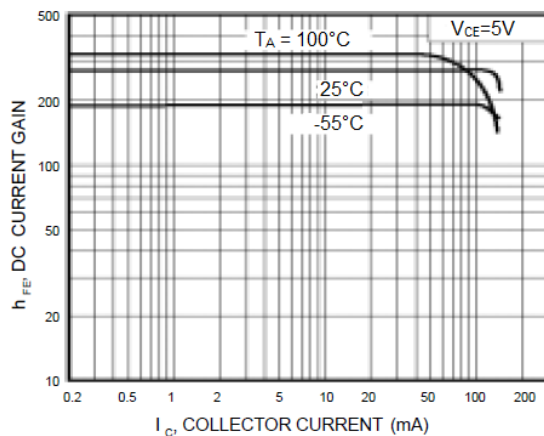


6. Collector-emitter saturation voltage vs. collector current

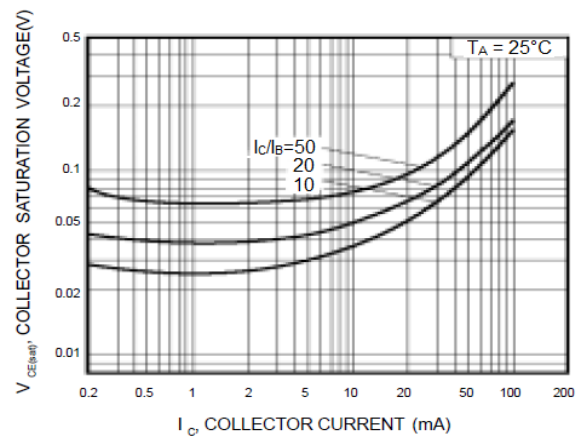





7. Collector-emitter saturation voltage vs. collector current (I)

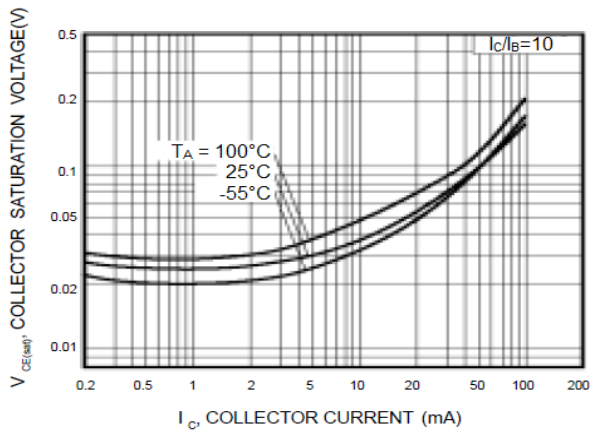


8. Collector-emitter saturation voltage vs. collector current (II)

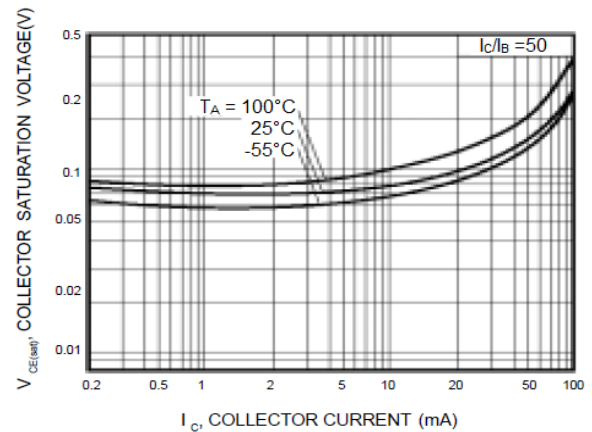


9. Gain bandwidth product vs. emitter current

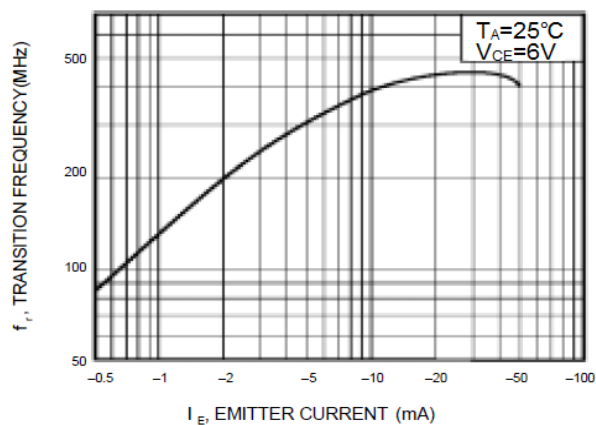

10. Base-collector time constant vs. emitter current

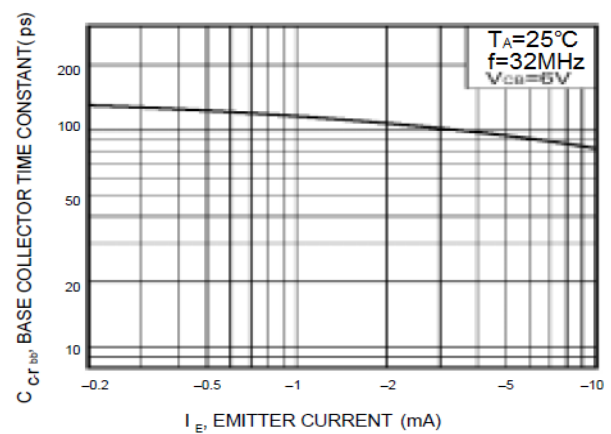


11. Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

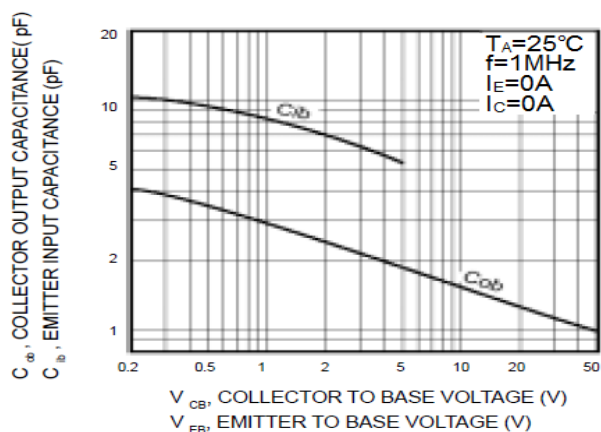



PACKAGE INFORMATION

Dimension in SOT-23 Package (Unit: mm)

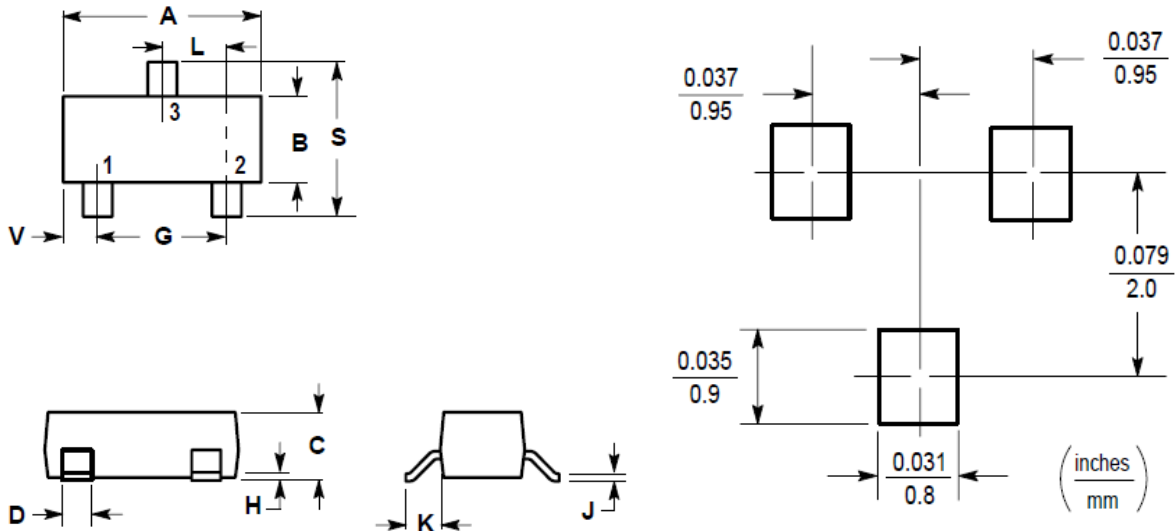

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.1102	0.1197
B	1.20	1.40	0.0472	0.0551
C	0.89	1.11	0.0350	0.0440
D	0.37	0.50	0.0150	0.0200
G	1.78	2.04	0.0701	0.0807
H	0.013	0.100	0.0005	0.0040
J	0.085	0.177	0.0034	0.0070
K	0.35	0.69	0.0140	0.0285
L	0.89	1.02	0.0350	0.0401
S	2.10	2.64	0.0830	0.1039
V	0.45	0.60	0.0177	0.0236



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.