



### NCE N-Channel Enhancement Mode Power MOSFET

#### DESCRIPTION (2) D The NCE80H12 uses advanced trench technology and design to provide excellent R<sub>DS(ON)</sub> with low gate charge. It can be used in a wide variety of applications. (1) G 아 **GENERAL FEATURES** (3) s V<sub>DS</sub> =80V,I<sub>D</sub> =120A $R_{DS(ON)}$ <6m $\Omega$ @ V<sub>GS</sub>=10V Schematic diagram High density cell design for ultra low Rdson • Fully characterized Avalanche voltage and current Good stability and uniformity with high E<sub>AS</sub> • Excellent package for good heat dissipation NCE Special process technology for high ESD capability NCE80H12 WW YY Application G DS Power switching application Hard Switched and High Frequency Circuits Marking and pin Assignment • Uninterruptible Power Supply 100% UIS TESTED! 100% ΔVds TESTED!

#### Package Marking And Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
NCE80H12	NCE80H12	TO-220	-	-	-

TO-220 top view

#### Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	Vds	80	V
Gate-Source Voltage	Vgs	±20	V
Drain Current-Continuous	I <sub>D</sub>	120	A
Drain Current-Continuous(T <sub>C</sub> =100℃)	I <sub>D</sub> (100℃)	84	A
Pulsed Drain Current	I <sub>DM</sub>	450	A
Maximum Power Dissipation	PD	220	W
Derating factor		1.47	W/℃
Single pulse avalanche energy (Note 5)	E <sub>AS</sub>	1400	mJ
Operating Junction and Storage Temperature Range	TJ,TSTG	-55 To 175	°C





#### **Thermal Characteristic**

Thermal Resistance, Junction-to-Case(Note 2)	$R_{ extsf{ heta}JC}$	0.68	°C <b>/W</b>
--	-----------------------	------	--------------

#### Electrical Characteristics (TA=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Off Characteristics			•			
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V I <sub>D</sub> =250µA	80	89	-	V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =80V,V <sub>GS</sub> =0V		-	1	μA
Gate-Body Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±20V,V <sub>DS</sub> =0V	-	-	±100	nA
On Characteristics (Note 3)	·					
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> ,I <sub>D</sub> =250µA	2	3	4	V
Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =40A	-	4.9	6	mΩ
Forward Transconductance	<b>g</b> fs	V <sub>DS</sub> =25V,I <sub>D</sub> =57A	90	-	-	S
Dynamic Characteristics (Note4)	·					
Input Capacitance	C <sub>lss</sub>		-	6500	-	PF
Output Capacitance	Coss	V <sub>DS</sub> =25V,V <sub>GS</sub> =0V, F=1.0MHz	-	520	-	PF
Reverse Transfer Capacitance	C <sub>rss</sub>		-	460	-	PF
Switching Characteristics (Note 4)	·					
Turn-on Delay Time	t <sub>d(on)</sub>		-	26	-	nS
Turn-on Rise Time	tr	$V_{DD}$ =30V, $I_D$ =2A, $R_L$ =15 $\Omega$	-	24	-	nS
Turn-Off Delay Time	t <sub>d(off)</sub>	V <sub>GS</sub> =10V,R <sub>G</sub> =2.5Ω	-	91	-	nS
Turn-Off Fall Time	t <sub>f</sub>		-	39	-	nS
Total Gate Charge	Qg	)/ _20)/   _20)	-	163		nC
Gate-Source Charge	Q <sub>gs</sub>	V <sub>DS</sub> =30V,I <sub>D</sub> =30A, V <sub>GS</sub> =10V	-	31		nC
Gate-Drain Charge	Q <sub>gd</sub>	VGS-10V	-	64		nC
Drain-Source Diode Characteristics	·					
Diode Forward Voltage (Note 3)	V <sub>SD</sub>	V <sub>GS</sub> =0V,I <sub>S</sub> =40A	-		1.2	V
Diode Forward Current (Note 2)	Is		-	-	120	А
Reverse Recovery Time	t <sub>rr</sub>	TJ = 25°C, IF = 40A	-	42	60	nS
Reverse Recovery Charge	Qrr	di/dt = 100A/µs(Note3) - 66 80		nC		
Forward Turn-On Time	t <sub>on</sub>	Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD)				

#### Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.

**2.** Surface Mounted on FR4 Board,  $t \le 10$  sec.

**3.** Pulse Test: Pulse Width  $\leq$  300µs, Duty Cycle  $\leq$  2%.

4. Guaranteed by design, not subject to production

5. EAS condition: Tj=25  $^\circ \!\! \mathrm{C}$  ,V\_DD=40V,V\_G=10V,L=0.5mH,Rg=25 $\Omega$ 




http://www.ncepower.com

Pb Free Product




## **Test circuit**


1) E<sub>AS</sub> test Circuits

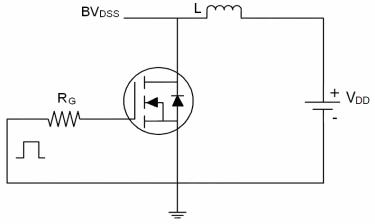

2) Gate charge test Circuit:

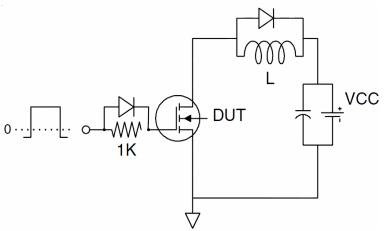


3) Switch Time Test Circuit:

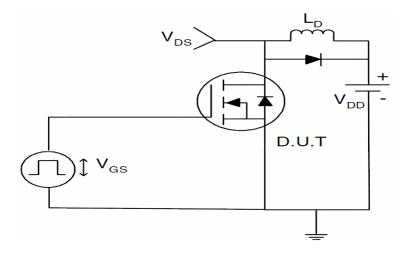



NCE80H12


### TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (Curves)

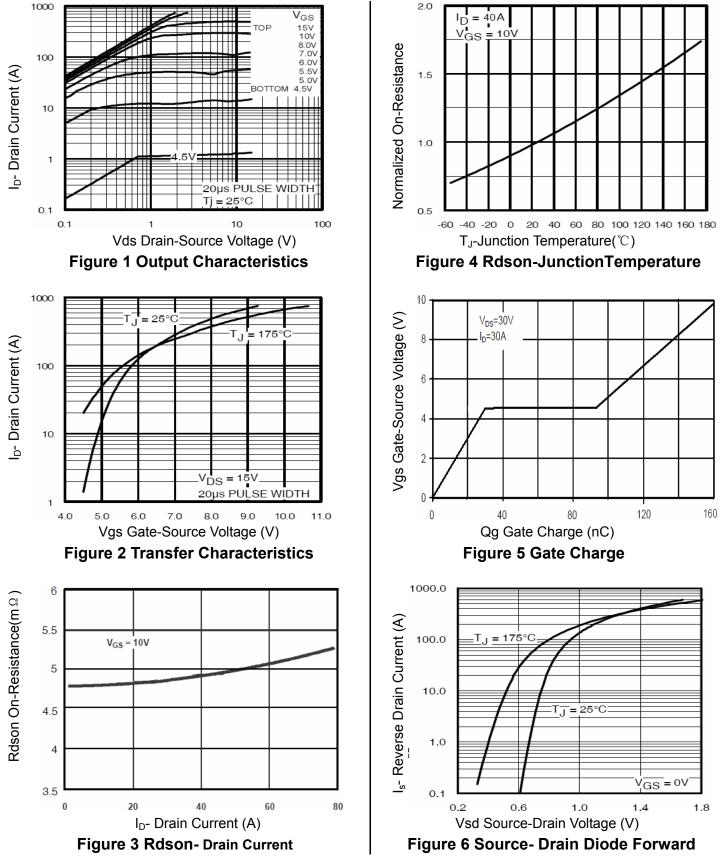









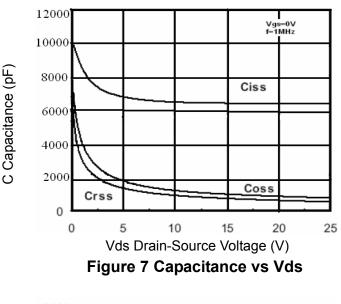

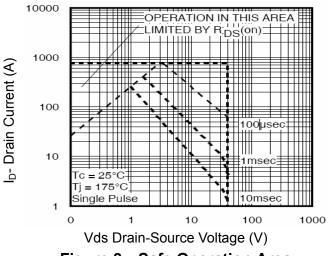



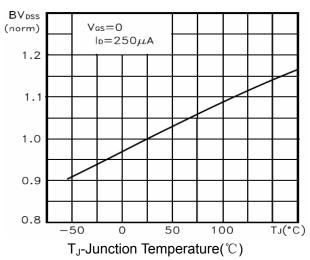


Figure 9 BV<sub>DSS</sub> vs Junction Temperature



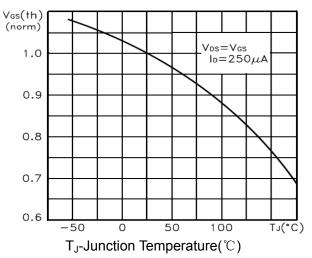


Figure 10 V<sub>GS(th)</sub> vs Junction Temperature






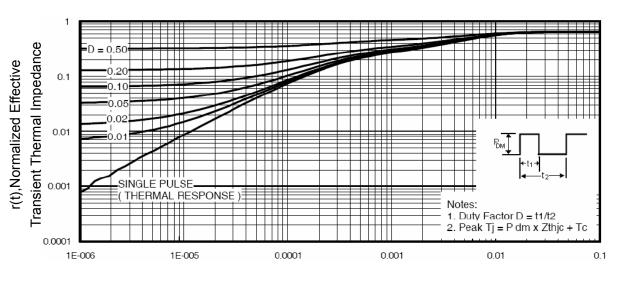



# NCE80H12


## **TO-220-3L Package Information**

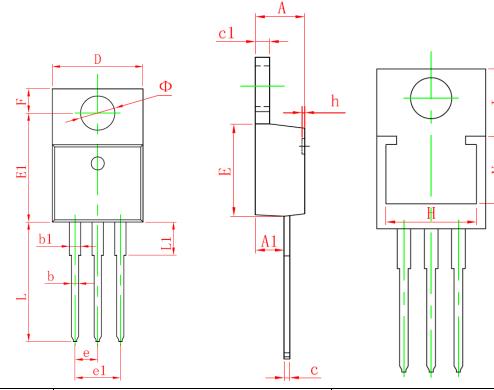

Symbol	Dimensions	In Millimeters	Dimensions In Inches		
Symbol	Min	Max	Min	Max	
Α	4.470	4.670	0.176	0.184	
A1	2.520	2.820	0.099	0.111	
b	0.710	0.910	0.028	0.036	
b1	1.170	1.370	0.046	0.054	
c	0.330	0.650	0.013	0.026	
c1	1.200	1.400	0.047	0.055	
D	10.010	10.350	0.394	0.407	
Ε	8.500	8.900	0.335	0.350	
E1	12.060	12.460	0.475	0.491	
e	2.540 (TYP.)		0.100 (TYP.)		
e1	4.980	5.180	0.196	0.204	
F	2.590	2.890	0.102	0.114	
Н	8.440 REF.		0.332 REF.		
h	0.000	0.300	0.000	0.012	
L	13.400	13.800	0.528	0.543	
L1	3.560	3.960	0.140	0.156	
V	6.360 REF.		0.250 REF.		
Ι	6.300 REF.		0.248 REF.		
Φ	3.735	3.935	0.147	0.155	



http://www.ncepower.com



#### ATTENTION:

- Any and all NCE power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE power representative nearest you before using any NCE power products described or contained herein in such applications.
- NCE power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE power products described or contained herein.
- Specifications of any and all NCE power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE power product that you intend to use.
- This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.