

## SINGLE-SUPPLY DUAL COMPARATOR



### ■ GENERAL DESCRIPTION

The NJM2903/2403 consist of two independent precision voltage comparators with an offset voltage specification as low as 5.0mV max for two comparators, which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. The NJM2903/2403 have unique characteristic: the input common-mode voltage range includes ground, even though operated from a single power supply voltage. Application areas include limit comparators, simple analog-to-digital converters; pulse, square-wave and time delay generators; wide range  $V_{CO}$ ; MOS clock timers; multivibrators and high voltage digital logic gates. The NJM2903/2403 were designed to directly interface with TTL and MOS. When operated from both plus and minus power supplies, the NJM2903/2403 will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.

### ■ FEATURES

- Operating Voltage +2V~+36V
- Single Supply Operation
- Open Collector Output
- High Output Sink Current 15mA (@ NJM2403)
- Package Outline DIP8, DMP8, SIP8, SSOP8,  
NJM2903 only: SOP8 JEDEC 150mil,  
:MSOP8 (TVSP8) MEET JEDEC MO-187-DA/ THIN TYPE
- Bipolar Technology


### ■ PIN CONFIGURATION

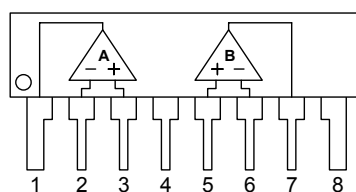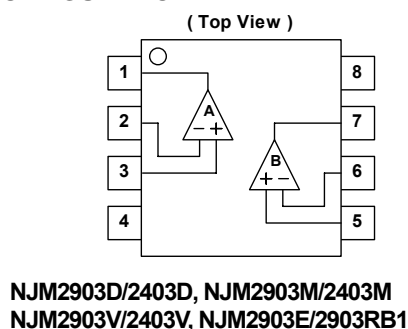

### PIN FUNCTION

1. A OUTPUT
2. A - INPUT
3. A +INPUT
4. GND
5. B +INPUT
6. B - INPUT
7. B OUTPUT
8.  $V^+$

### ■ EQUIVALENT CIRCUIT ( 1/2 Shown )

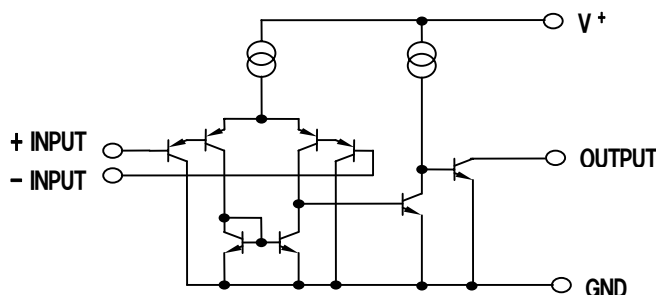

*New Japan Radio Co., Ltd.*

# NJM2903/2403

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

| PARAMETER                   | SYMBOL           | RATINGS                                                                                               | UNIT |
|-----------------------------|------------------|-------------------------------------------------------------------------------------------------------|------|
| Supply Voltage              | V <sup>+</sup>   | 36 ( or ±18 )                                                                                         | V    |
| Differential Input Voltage  | V <sub>ID</sub>  | 36                                                                                                    | V    |
| Input Voltage               | V <sub>IN</sub>  | -0.3~+36                                                                                              | V    |
| Power Dissipation           | P <sub>D</sub>   | ( DIP8 ) 500<br>( DMP8 ) 300<br>( SSOP8 ) 250<br>( SIP8 ) 800<br>( SOP8 ) 300<br>( MSOP8(TVSP8) ) 320 | mW   |
| Operating Temperature Range | T <sub>opr</sub> | -40~+85                                                                                               | °C   |
| Storage Temperature Range   | T <sub>stg</sub> | -50~+125                                                                                              | °C   |

## ■ ELECTRICAL CHARACTERISTICS


( V<sup>+</sup>=5V, Ta=25°C )

| PARAMETER                       | SYMBOL            | TEST CONDITION                                                                              | 2903  |      |      | 2403  |      |      | UNIT |
|---------------------------------|-------------------|---------------------------------------------------------------------------------------------|-------|------|------|-------|------|------|------|
|                                 |                   |                                                                                             | MIN.  | TYP. | MAX. | MIN.  | TYP. | MAX. |      |
| Input Offset Voltage            | V <sub>IO</sub>   | R <sub>S</sub> =0Ω, V <sub>O</sub> =1.4V                                                    | -     | -    | 7    | -     | -    | 10   | mV   |
| Input Offset Current            | I <sub>IO</sub>   |                                                                                             | -     | -    | 50   | -     | -    | 100  | nA   |
| Input Bias Current              | I <sub>B</sub>    |                                                                                             | -     | 30   | 250  | -     | 40   | 500  | nA   |
| Input Common Mode Voltage Range | V <sub>ICM</sub>  |                                                                                             | 0~3.5 | -    | -    | 0~3.5 | -    | -    | V    |
| Large Signal Voltage Gain       | A <sub>V</sub>    | R <sub>L</sub> =15kΩ                                                                        | -     | 106  | -    | -     | 106  | -    | dB   |
| Response Time                   | t <sub>R</sub>    | R <sub>L</sub> =5.1kΩ                                                                       | -     | 1.5  | -    | -     | 1.5  | -    | μs   |
| Output Sink Current             | I <sub>SINK</sub> | V <sub>IN</sub> <sup>-</sup> =1V, V <sub>IN</sub> <sup>+</sup> =0V, V <sub>O</sub> =1.5V    | 6     | -    | -    | 20    | -    | -    | mA   |
| Output Saturation Voltage       | V <sub>SAT</sub>  | V <sub>IN</sub> <sup>-</sup> =1V, V <sub>IN</sub> <sup>+</sup> =0V, I <sub>SINK</sub> =3mA  | -     | 200  | 400  | -     | -    | -    | mV   |
| Output Saturation Voltage       | V <sub>SAT</sub>  | V <sub>IN</sub> <sup>-</sup> =1V, V <sub>IN</sub> <sup>+</sup> =0V, I <sub>SINK</sub> =15mA | -     | -    | -    | -     | 200  | 400  | mV   |
| Output Leakage Current          | I <sub>LEAK</sub> | V <sub>IN</sub> <sup>-</sup> =0V, V <sub>IN</sub> <sup>+</sup> =1V, V <sub>O</sub> =5V      | -     | -    | 1.0  | -     | -    | 1.0  | μA   |
| Operating Current               | I <sub>CC</sub>   |                                                                                             | -     | 0.4  | 1.0  | -     | 0.5  | 1.5  | mA   |

## ■ TYPICAL CHARACTERISTICS


**Input Bias Current vs. Temperature**

( $V^+ = 5\text{ V}$ )

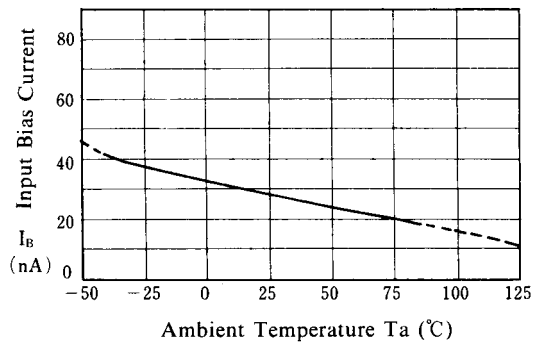


**Input Offset Voltage vs. Temperature**

( $V^+ = 5\text{ V}$ )

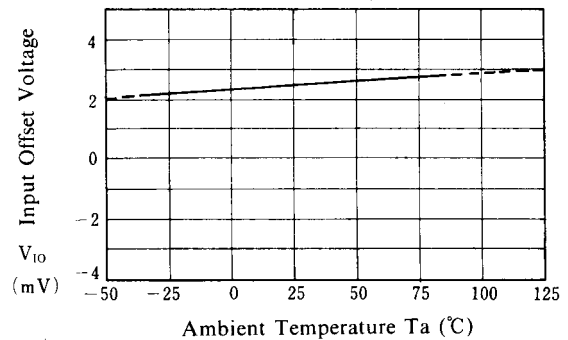


**Operating Current vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

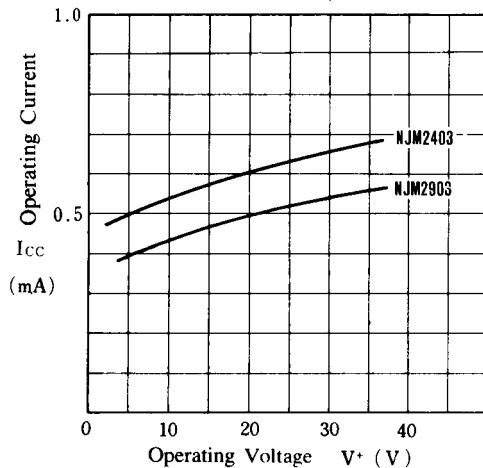


**Input Bias Current vs. Operating Voltage**

( $T_a = 25^\circ\text{C}$ )

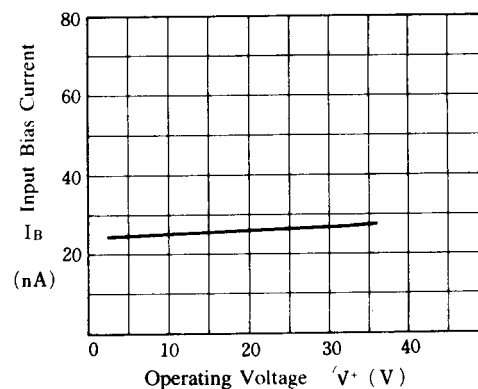


**NJM2903 Output Saturation Voltage vs. Output Sink Current**

( $V^+ = 5\text{ V}$ )

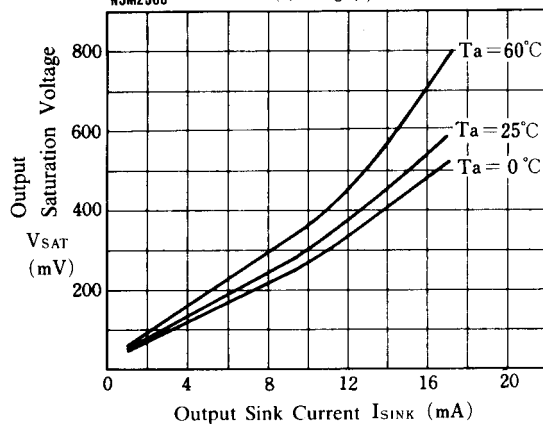





**NJM2403 Output Saturation Voltage vs. Output Sink Current**

( $V^+ = 5\text{ V}$ )

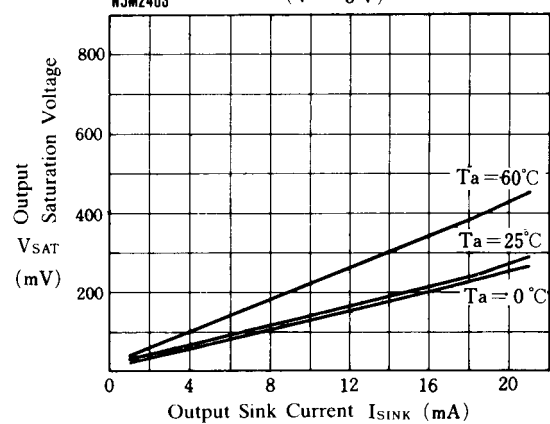


# NJM2903/2403

## ■ TYPICAL CHARACTERISTICS

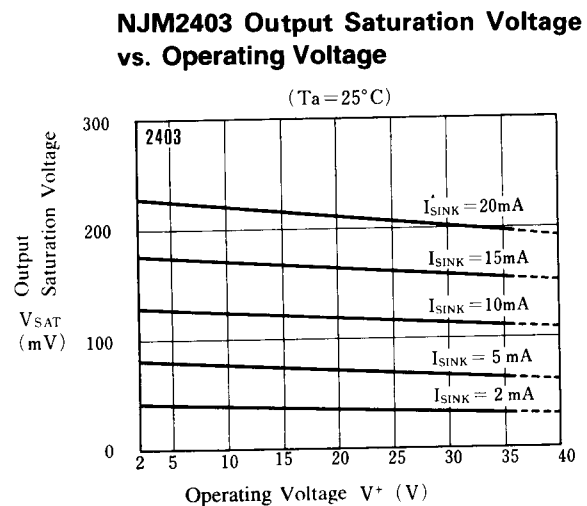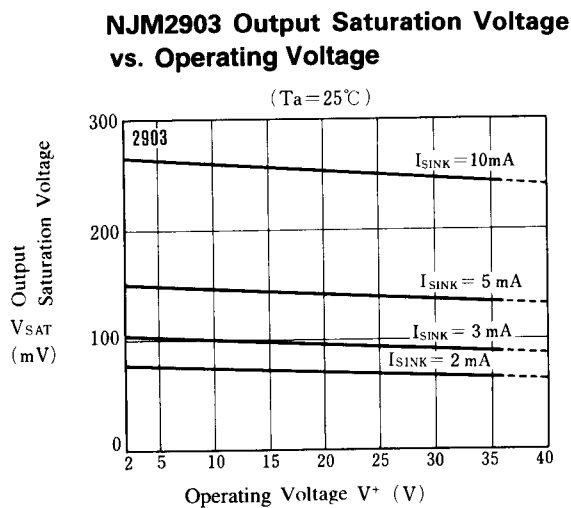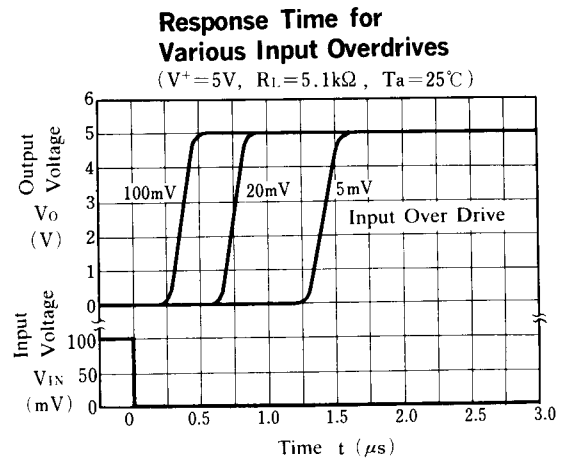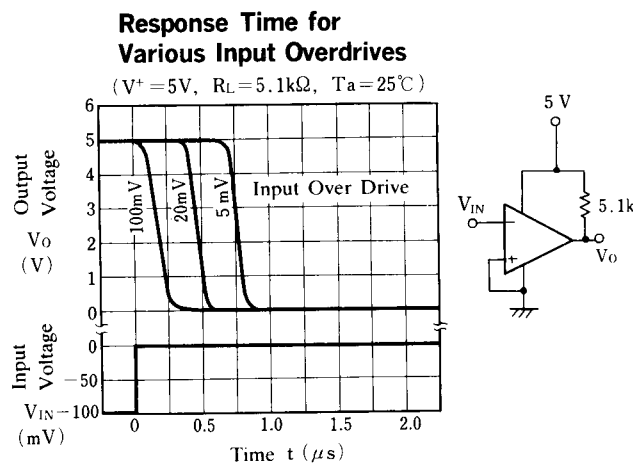


## ■ TYPICAL APPLICATIONS


Comparator With Hysteresis

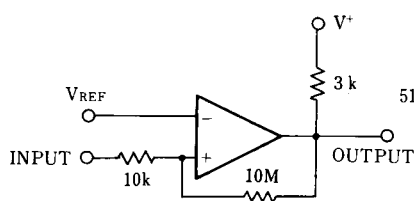

Pulse Generator



Output Strobing Circuit

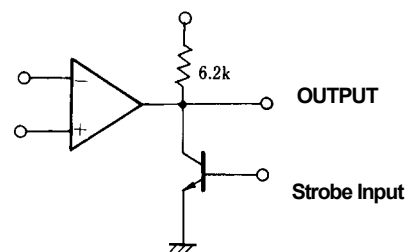

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.