

10G SFP+ DWDM Optical Transceiver

PN: OP3980D-Dxx

Product Specification

Features:

- ✧ Supports 1.0 to 11.3Gb/s bit rates
- ✧ Hot-Pluggable SFP+ form factor
- ✧ Duplex LC connector
- ✧ 100GHz ITU Grid, C Band
- ✧ DWDM EML transmitter, APD photo-detector
- ✧ SMF links up to 80km
- ✧ Built-in digital diagnostic functions
- ✧ Single +3.3V Power Supply
- ✧ Operating case temperature: 0~ 70°C
- ✧ Power dissipation: <1.7W
- ✧ RoHS Compliant

Applications:

- ✧ 10G Ethernet
- ✧ SDH/SONET
- ✧ Fibre Channel
- ✧ DWDM Networks

Description:

Opway' OP3980D-Dxx is a very compact 10Gb/s optical transceiver module for serial optical communication applications at 10Gb/s. The OP3980D-Dxx converts a 10Gb/s serial electrical data stream to 10Gb/s optical output signal and a 10Gb/s optical input signal to 10Gb/s serial electrical data streams. The high speed 10Gb/s electrical interface is fully compliant with SFI specification.

The high performance DWDM EML transmitter and high sensitivity APD receiver provide superior performance for Multiple applications up to 80km links.

The SFP+ Module compliant with SFF-8431, SFF-8432. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP compliant form factor provides hot pluggability, easy optical port upgrades and low EMI emission.

● Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Power Supply Voltage	VCC	0		3.6	V
Storage Temperature	Ts	-40		85	°C
Operating Case Temperature	TA	0		70	°C
Relative Humidity	RH	0		85	%

● Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	Vcc	3.135		3.465	V	
Supply Current	Icc			515	mA	
Power Consumption	P			1.7	W	
Transmitter Section:						
Input differential impedance	R _{in}		100		Ω	1
Differential input voltage swing	V _{in,pp}	100		1000	mV	
Transmit Disable Voltage	V _D	2		V _{CC}	V	
Transmit Enable Voltage	V _{EN}	V _{ee}		V _{ee} +0.8	V	
Receiver Section:						
Differential output voltage swing	V _O	120		800	mV	
LOS Fault	V _{losfault}	2		V _{CC_host}	V	2
LOS Normal	V _{los norm}	V _{ee}		V _{ee} +0.8	V	2

Notes:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1.

● Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Optical Wavelength	λ	X-100	X	X+100	pm	
Spectral width	Δλ			0.4	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Optical Power	P _{avg}	-1		+5	dBm	
Laser Off Power	P _{off}			-30	dBm	
Extinction Ratio	ER	6			dB	
Receiver Section:						
Center Wavelength	λ _r	1260		1620	nm	
Receiver Sensitivity	Sen			-23	dBm	1
Input Saturation Power(Overload)	Sat	-7			dBm	
Los Assert	LOS _A	-35		-	dBm	
Los De-assert	LOS _D			-24	dBm	

Los Hysteresis	LOS _H	0.5			dB	
----------------	------------------	-----	--	--	----	--

Notes:

1. Measured with a PRBS 2³¹-1 test pattern, @10.3125Gb/s, BER<10⁻¹².

● Pin Assignment

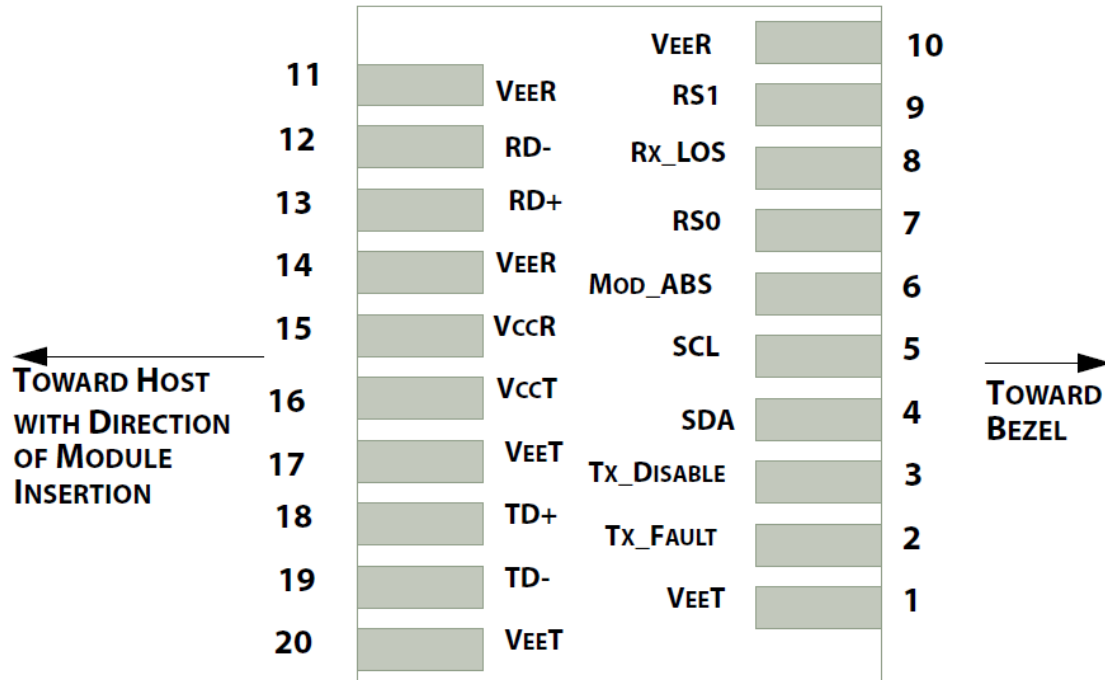


Diagram of Host Board Connector Block Pin Numbers and Names

● Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDA	2 wire serial interface data input/output (SDA)	
5	SCL	2 wire serial interface clock input (SCL)	
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate Select 0. Not Used	
8	LOS	Receiver Loss of Signal Indication	4
9	RS1	Rate Select 1. Not Used	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1

18	TD+	Transmitter non-inverted data out put	
19	TD-	Transmitter inverted data out put	
20	VeeT	Module transmitter ground	1

Notes:

1. The module ground pins shall be isolated from the module case.
2. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.
3. This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
4. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.


● SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFF -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I²C interface at address A0h and A2h.

The memory is mapped in Table 1.

For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.


Table 1. Digital Diagnostic Memory Map (Specific Data Field Descriptions)

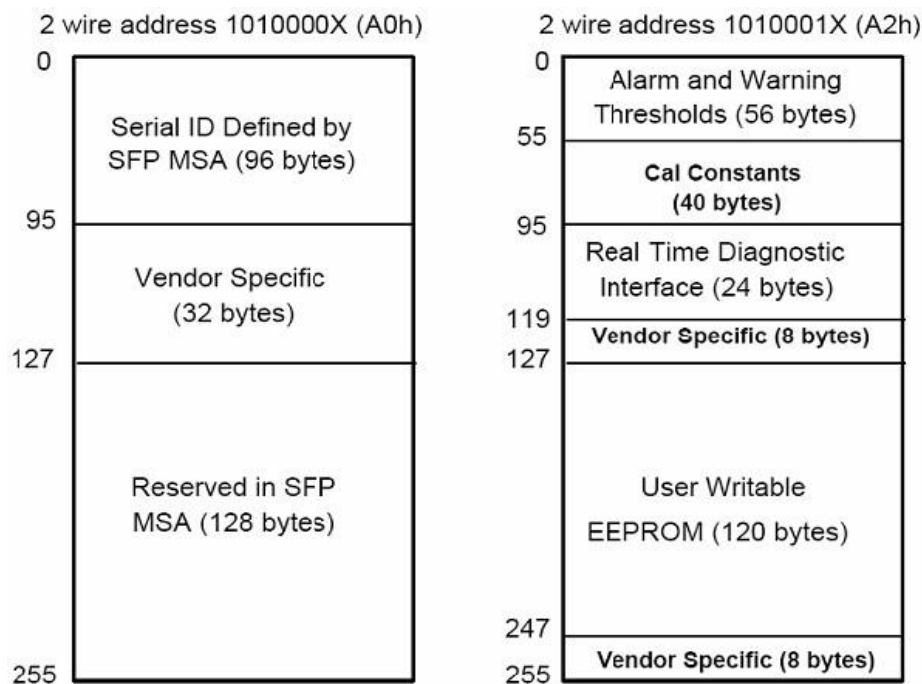


● Digital Diagnostic Monitor Characteristics

Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	± 3.0	$^{\circ}\text{C}$
98-99	VCC3 Internal Supply Voltage	± 3.0	%
100-101	Laser Bias Current	± 10	%
102-103	Tx Output Power	± 3.0	dB
104-105	Rx Input Power	± 3.0	dB

● Recommended Circuit

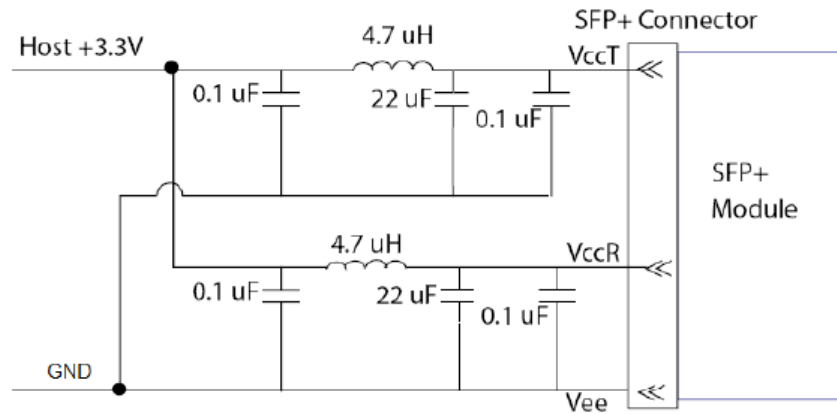


Recommended Host Board Power Supply Circuit

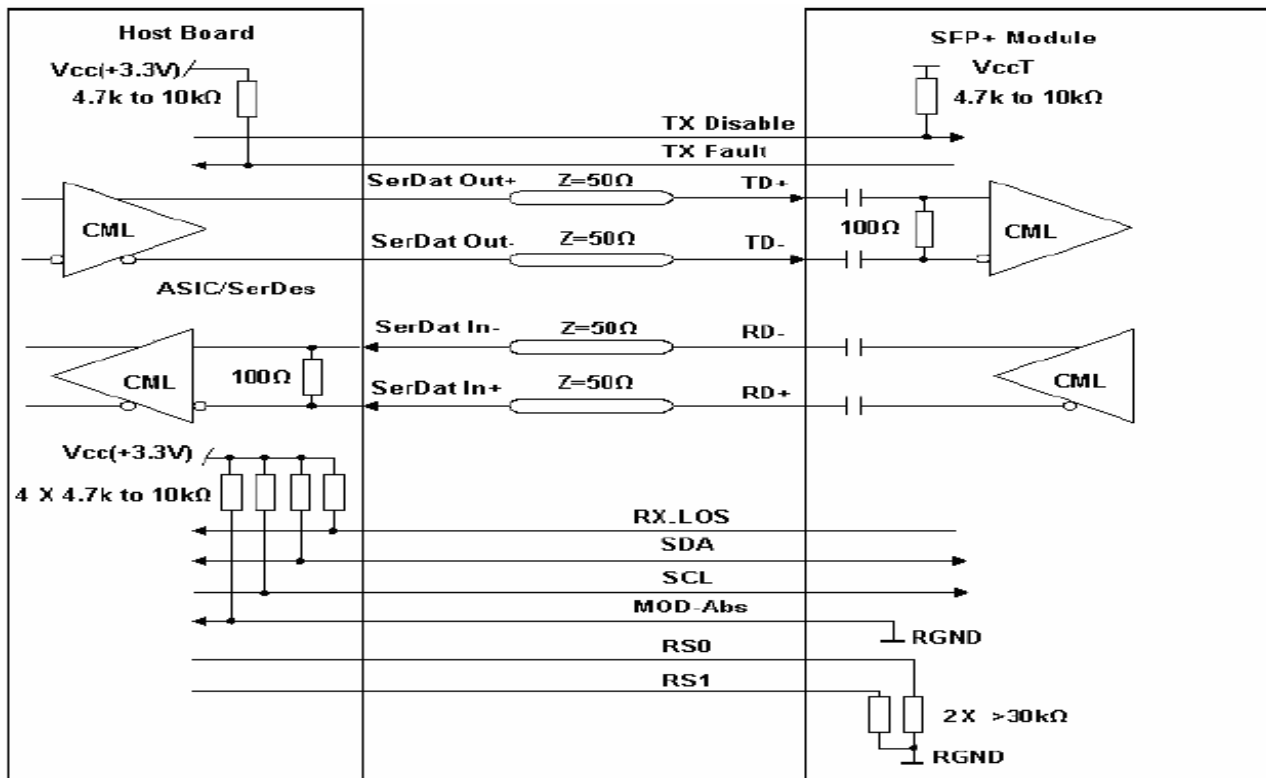

Recommended High-speed Interface Circuit

● **Mechanical Dimensions(Unit:mm)**

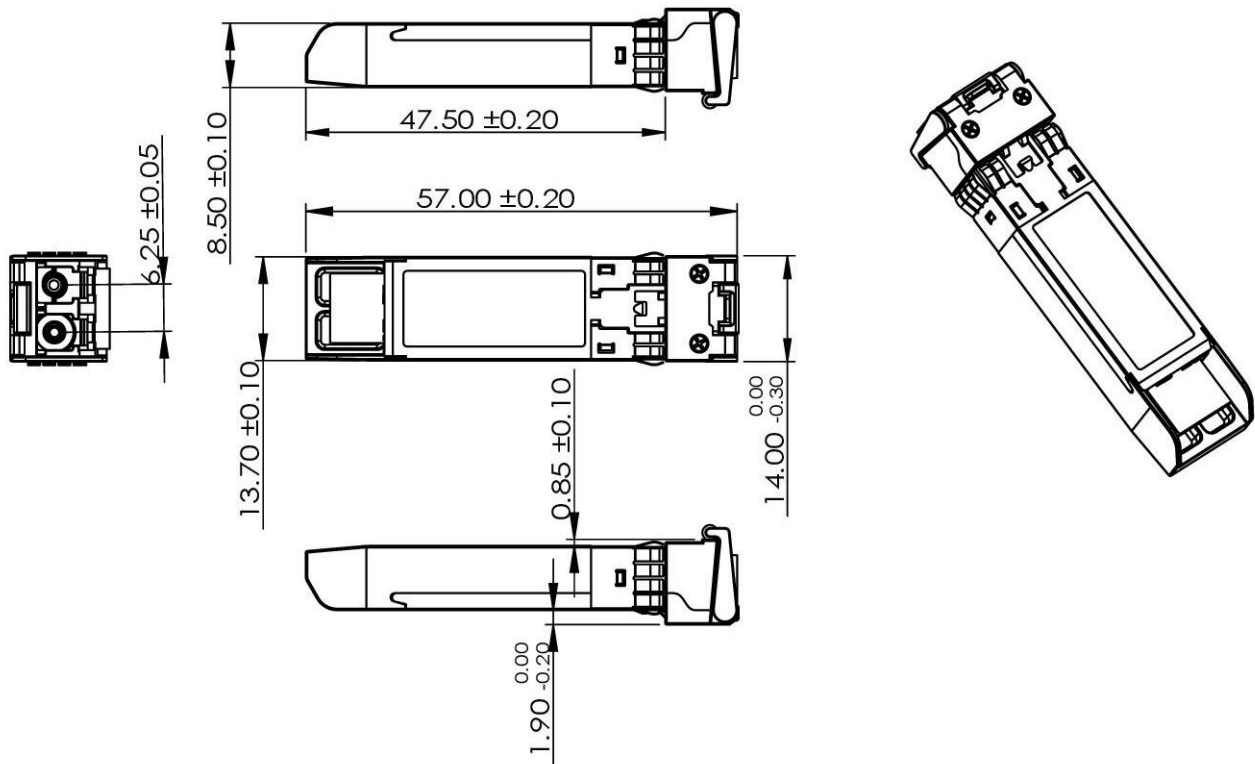

● **Order Information**

OP3980D-Dxx		xx: 100GHz ITU Grid Wavelength
Part No.	Central Wavelength(nm)	Frequency (THZ)
OP3980D-D61	1528.77	196.1
OP3980D-D60	1529.55	196.0
OP3980D-D59	1530.33	195.9
OP3980D-D58	1531.12	195.8
OP3980D-D57	1531.90	195.7
OP3980D-D56	1532.68	195.6
OP3980D-D55	1533.47	195.5
OP3980D-D54	1534.25	195.4
OP3980D-D53	1535.04	195.3
OP3980D-D52	1535.82	195.2
OP3980D-D51	1536.61	195.1
OP3980D-D50	1537.40	195.0
OP3980D-D49	1538.19	194.9
OP3980D-D48	1538.98	194.8
OP3980D-D47	1539.77	194.7
OP3980D-D46	1540.56	194.6
OP3980D-D45	1541.35	194.5
OP3980D-D44	1542.14	194.4
OP3980D-D43	1542.94	194.3
OP3980D-D42	1543.73	194.2
OP3980D-D41	1544.53	194.1

OP3980D-D40	1545.32	194.0
OP3980D-D39	1546.12	193.9
OP3980D-D38	1546.92	193.8
OP3980D-D37	1547.72	193.7
OP3980D-D36	1548.51	193.6
OP3980D-D35	1549.32	193.5
OP3980D-D34	1550.12	193.4
OP3980D-D33	1550.92	193.3
OP3980D-D32	1551.72	193.2
OP3980D-D31	1552.52	193.1
OP3980D-D30	1553.33	193.0
OP3980D-D29	1554.13	192.9
OP3980D-D28	1554.94	192.8
OP3980D-D27	1555.75	192.7
OP3980D-D26	1556.55	192.6
OP3980D-D25	1557.36	192.5
OP3980D-D24	1558.17	192.4
OP3980D-D23	1558.98	192.3
OP3980D-D22	1559.79	192.2
OP3980D-D21	1560.61	192.1
OP3980D-D20	1561.42	192.0
OP3980D-D19	1562.23	191.9
OP3980D-D18	1563.05	191.8
OP3980D-D17	1563.86	191.7

● Document Revision

Version No.	Date	Reviser	Description
V1.0	2023-11-13	Kevin	Initial issued

OPWAY reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by OPWAY Communication Inc.

Copyright © OPWAY

All Rights Reserved