

Silicon NPN Power Transistors

2SD1827

DESCRIPTION

- With TO-220F package
- Complement to type 2SB1225
- High DC current gain.
- Large current capacity and wide ASO.
- Low saturation voltage.
- DARLINGTON

APPLICATIONS

- Suitable for use in control of motor drivers, printer hammer drivers, relay drivers, and constant-voltage regulators.

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

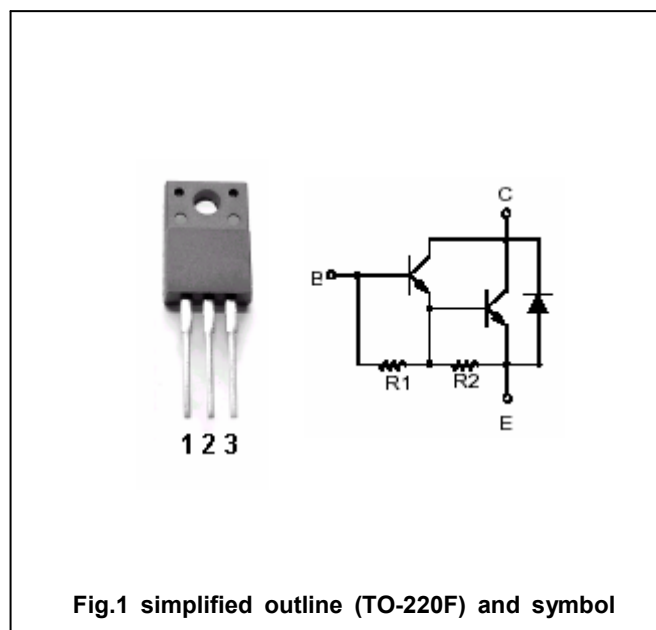


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings ($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	70	V
V_{CEO}	Collector-emitter voltage	Open base	60	V
V_{EBO}	Emitter-base voltage	Open collector	6	V
I_C	Collector current		10	A
I_{CM}	Collector current-peak		15	A
P_C	Collector dissipation	$T_C=25^\circ\text{C}$	30	W
			2	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon NPN Power Transistors

2SD1827

CHARACTERISTICS

www.datasheet4u.com

 $T_j=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=5\text{mA}; I_E=0$	70			V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=50\text{mA}; R_{BE}=\infty$	60			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=5\text{A}; I_B=10\text{mA}$		0.9	1.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=5\text{A}; I_B=10\text{mA}$			2.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=40\text{V}; I_E=0$			0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=5\text{V}; I_C=0$			3.0	mA
h_{FE}	DC current gain	$I_C=5\text{A}; V_{CE}=2\text{V}$	2000	5000		

Switching times

t_{on}	Turn-on time	$I_C=5\text{A}; I_{B1}=0.01\text{A}$ $-I_{B2}=0.01\text{A}$ $V_{CC}=20\text{V}, R_L=4\Omega$		0.6		μs
t_s	Storage time			3.0		μs
t_f	Fall time			1.8		μs

Silicon NPN Power Transistors

2SD1827

PACKAGE OUTLINE

www.datasheet4u.com

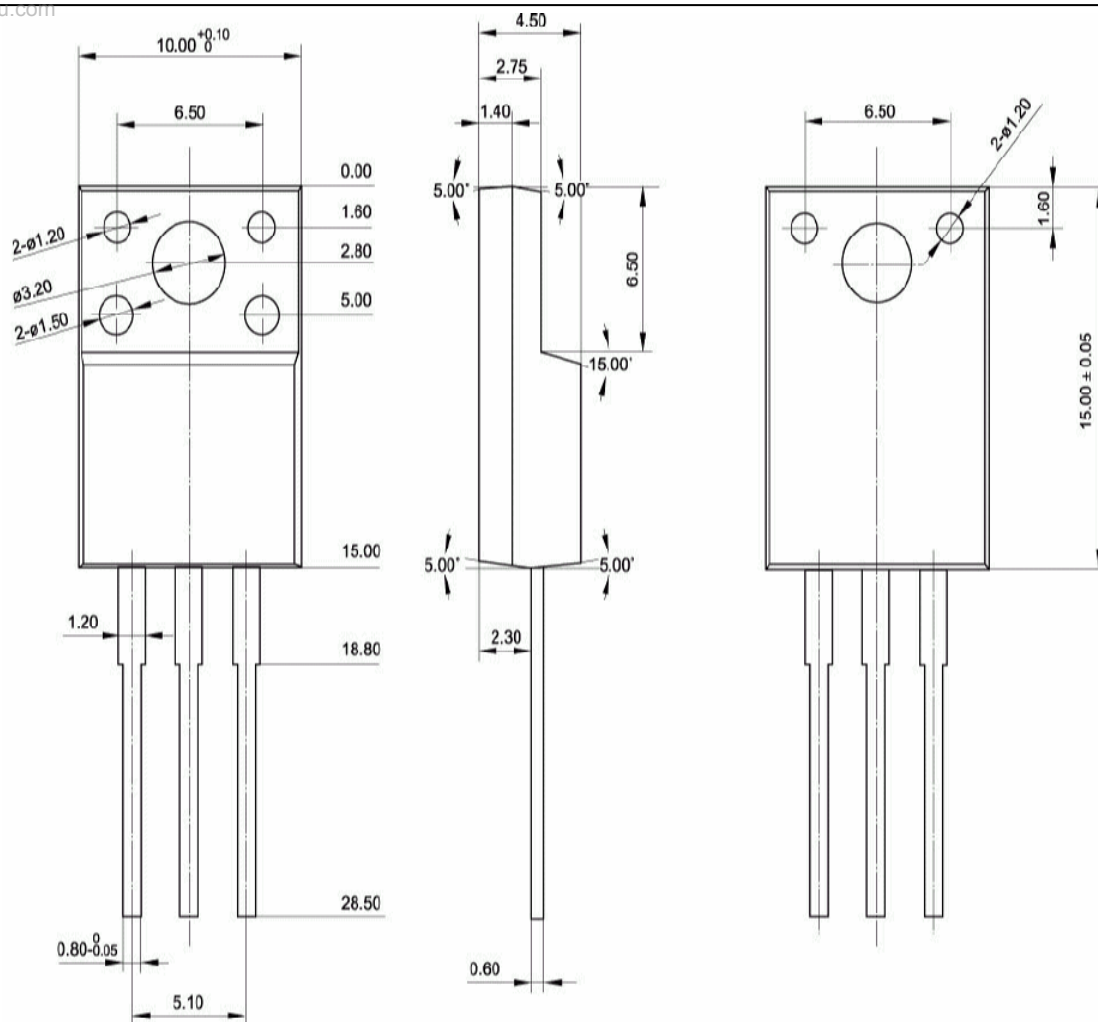


Fig.2 Outline dimensions