

Photointerrupters(Transmissive)

KODENSHI

SG - 227V

The SG - 227V photointerrupter high - performance standard type, combines high - output GaAs IRED with high sensitive phototransistor.

FEATURES


- PWB direct mount type
- GAP : 1.2mm
- With the installation positioning boss
- Low - boy type(installation height:4.0mm)

APPLICATIONS

- Cameras
- Video camera
- Digital camera
- Mini printers

DIMENSIONS

(Unit : mm)

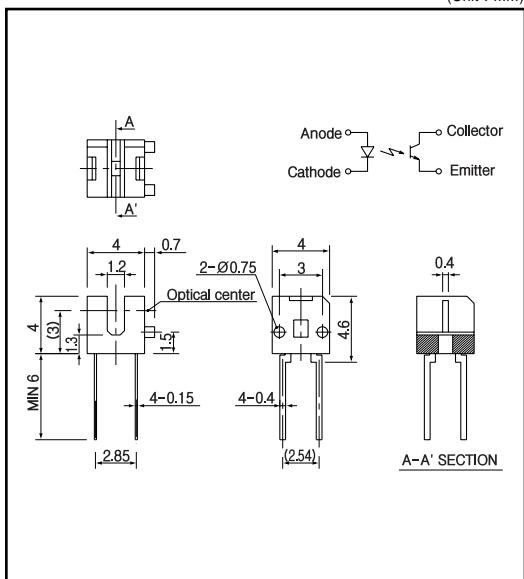

MAXIMUM RATINGS

(Ta=25 °C)

	Item	Symbol	Rating	Unit
Input	Power dissipation	P _D	75	mW
	Forward current	I _F	50	mA
	Reverse voltage	V _R	5	V
	Pulse forward current ¹⁾	I _{FP}	0.5	A
Output	Collector power dissipation	P _C	75	mW
	Collector current	I _C	20	mA
	C - E voltage	V _{CEO}	30	V
	E - C voltage	V _{ECO}	5	V
Operating temp. ²⁾		To pr.	- 20 ~ + 85	
Storage temp. ²⁾		T _{Stg.}	- 30 ~ + 100	
Soldering temp. ³⁾		T _{Sol.}	260	

¹⁾ 1. pulse width : t w 100 μ sec. period : T = 10 msec.

²⁾ 2. No icebound or dew ³⁾ 3. For MAX.5 seconds at the position of 1mm from the package

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

	Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V _F	I _F =20mA		1.2	1.4	V
	Reverse current	I _R	V _R =5V			10	μ A
	Peak wavelength	p	I _F =20mA		940		nm
Output	Collector dark current	I _{CEO}	V _{CE} =10V		1	100	nA
	Light current	I _C	I _F =10mA, V _E =5V, (Non shading)	0.3		3	mA
	Leakage current	I _{CEO(D)}	I _F =10mA, V _E =5V, (shading)		0.5	10	μ A
Transmissio	C - E saturation voltage	V _{CE(sat)}	I _F =10mA, I _E =0.03mA		0.15	0.4	V
	Rise time	tr	V _{CC} =5V, I _E =0.1mA, R=1K		50		μ sec.
	Fall time	tf			50		μ sec.


Photo interrupters(Transmissive)

SG - 227V


**Collector power dissipation Vs.
Ambient temperature**

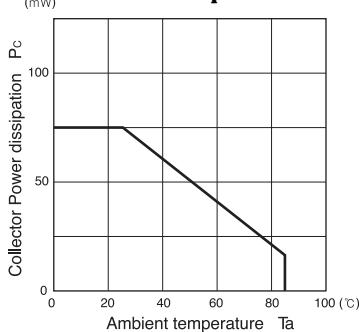


**Forward current Vs.
Forward voltage**

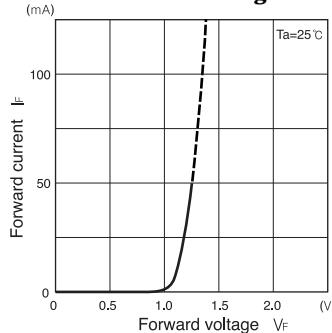


**Light current Vs.
Forward current**

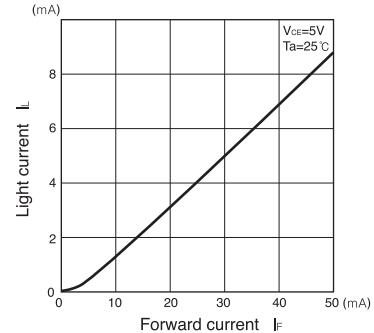


**Light current Vs.
Collector-Emitter voltage**

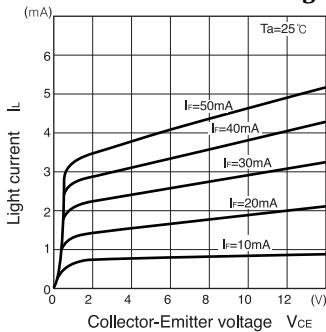


**Relative light current Vs.
Ambient temperature**

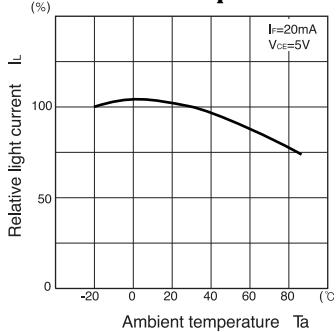


**Dark current Vs.
Ambient temperature**

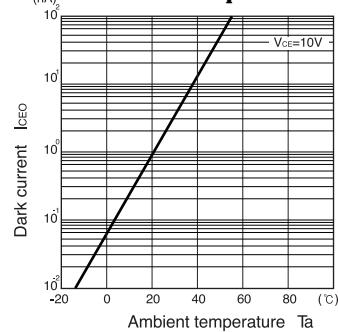


**Switching time Vs.
Load resistance**

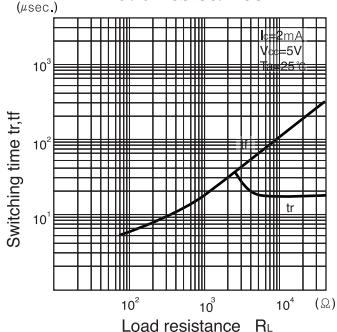

**Relative light current Vs.
Moving distance**

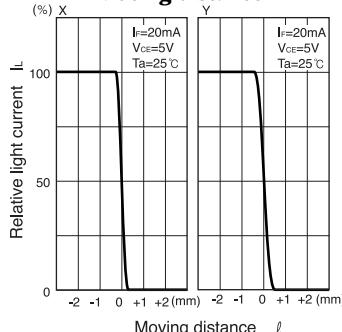

Switching time measurement circuit

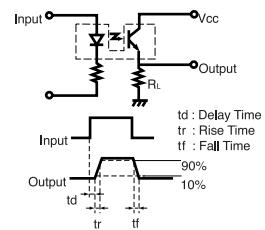

Method of measuring position detection characteristic

