



LOW FORWARD VOLTAGE SCHOTTKY BARRIER RECTIFIER

SRL4030P THRU SRL4060P

VOLTAGE RANGE

30 to 60 Volts

CURRENT


30.0 Amperes

FEATURES

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High efficiency
- High Surge Capability
- High Current capacity and Low Forward Voltage Drop
- For use in low voltage high frequency inverters, Free wheeling, and polarity protection applications
- Plastic Material has UL Flammability Classification 94V-0

MECHANICAL DATA

- Case: TO-3P(TO-247AD) molded plastic
- Terminals: Plated Lead solderable per MIL-STD-202 Method 208
- Polarity: See Diagram
- Weight: 5.6 grams (approx)
- Mounting Position: Any
- Marking: Type Number

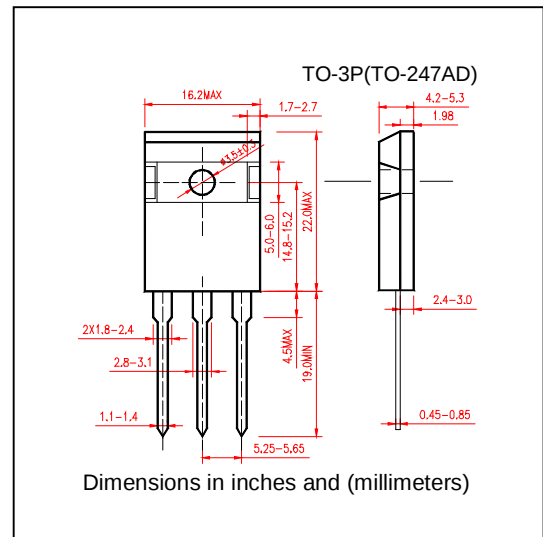

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	SRL 4030P	SRL 4035P	SRL 4040P	SRL 4045P	SRL 4050P	SRL 4060P	UNIT
Peak Repetitive Reverse Voltage		V _{RRM}	30	35	40	45	50	60	V
Working Peak Reverse Voltage		V _{RWM}							
DC Blocking Voltage		V _R							
RMS Reverse Voltage		V _{R(RMS)}	21	25	28	32	35	42	V
Average Rectified Output Current (Note 1)@T _c =95℃		I _O	40.0						A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	400						A
Forward Voltage Drop @I _F =20A,T _c =25℃		V _{FM}	0.55				0.65		V
Peak Reverse Current at Rated DC Blocking Voltage	T _c = 25℃	I _{RM}	2.0						mA
	T _c = 100℃		100						
Typical Junction Capacitance(Note2)		C _j	800						pF
Typical Resistance Junction to case(Note1)		R _{θJC}	1.5						℃/W
Operating and Storage Temperature Range		T _J T _{STG}	(-55 to +150)						℃

Notes:

1. Thermal Resistance Junction to case mounted on heatsink
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC



LOW FORWARD VOLTAGE SCHOTTKY BARRIER RECTIFIER

SRL4030P THRU SRL4060P

VOLTAGE RANGE	30 to 60 Volts
CURRENT	30.0 Amperes

RATINGE AND CHARACTERISTIC CURVES SRL4030P THRU SRL4060P

