




## Product Description

Sirenza Microdevices' SUF-4000 is a monolithically matched broadband high IP3 gain block covering 0.15-10 GHz. This pHEMT FET-based amplifier uses a patented self-bias Darlington topology featuring a gain and temperature compensating active bias network that operates from a single 5V supply. It offers efficient, cascadable performance in a compact 0.88 x 0.80 mm<sup>2</sup> die. It is well-suited for RF, LO, and IF driver applications.

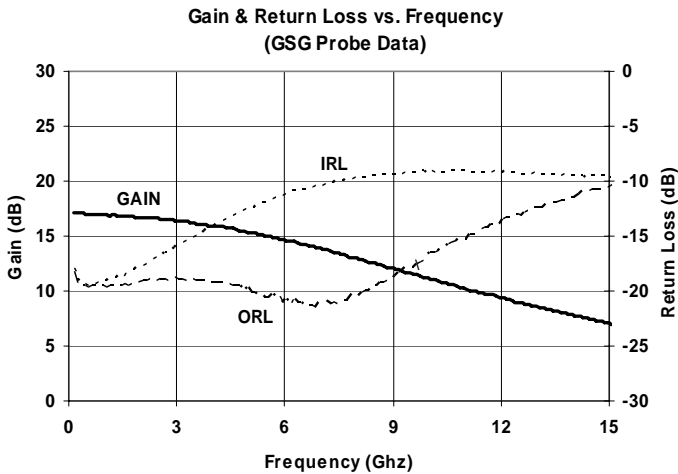

**Preliminary**

## SUF-4000

### 0.15-10 GHz, Cascadable pHEMT MMIC Amplifier

#### Product Features

- Broadband Performance
- High Gain = 17.0 dB @ 2 GHz
- P1dB = 21 dBm @ 2 GHz
- Low-noise, Efficient Gain Block
- 5V Operation, No Dropping Resistor
- Low Gain Variation vs. Temperature
- Patented Thermal Design
- Patented Self-Bias Darlington Topology

#### Applications

- Broadband Communications
- Test Instrumentation
- Military & Space
- LO and IF Mixer Applications
- High IP3 RF Driver Applications

Symbol	Parameters	Units	Frequency	Min.	Typ.	Max.
$G_p$	Small Signal Power Gain	dB	2 GHz 6 GHz		17.0 14.5	
P1dB	Output Power at 1dB Compression	dBm	2 GHz 6 GHz		21.0 20.0	
OIP3	Output Third Order Intercept Point	dBm	2 GHz 6 GHz		32.0 30.5	
NF	Noise Figure	dB	2 GHz 6 GHz		2.8 3.7	
IRL	Input Return Loss	dB	2 GHz 6 GHz		12.0 -11.5	
ORL	Output Return Loss	dB	2 GHz 6 GHz		-18.0 -20.0	
Isol	Reverse Isolation	dB	2 GHz 6 GHz		-21.0 -20.0	
$V_D$	Device Operating Voltage	V			5.0	
$I_D$	Device Operating Current	mA			73	
$\Delta G/\Delta T$	Gain Variation vs. Temperature	dB/°C			0.01	
Rth, j-l	Thermal Resistance (junction-to-backside)	°C/W			164	

**Test Conditions:**  $V_S = 5.0V$ ,  $I_D = 73mA$ , OIP3 Tone Spacing = 1MHz, Pout per tone = 0 dBm

$Z_S = Z_L = 50 \text{ Ohms}$ , 25C, GSG Probe Data With Bias Tees

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2001 Sirenza Microdevices, Inc.. All worldwide rights reserved.

303 S. Technology Ct.  
Broomfield, CO 80021


Phone: (800) SMI-MMIC

<http://www.sirenza.com>




## Typical Performance (GSG Probe Data)


**S21 vs. Frequency**

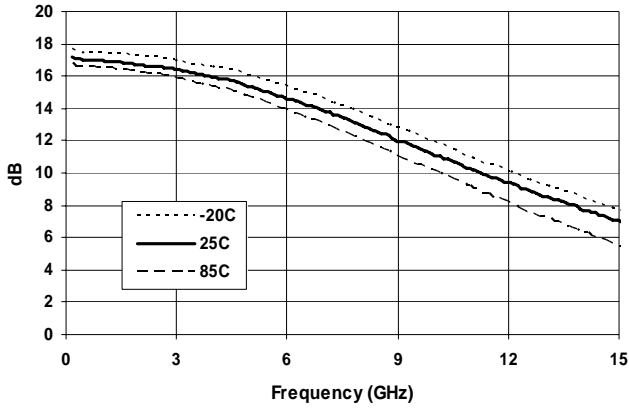


**P1dB vs. Frequency**

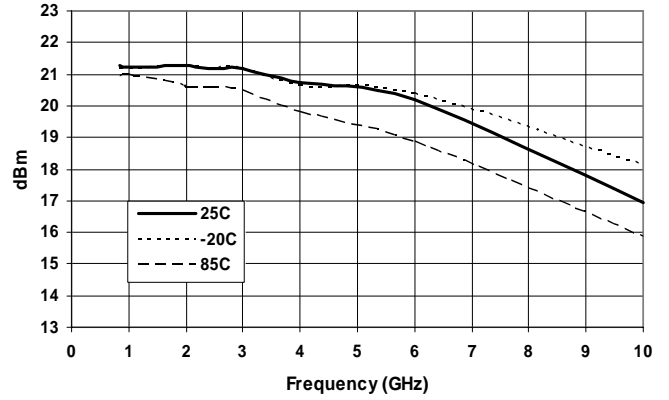


**S11 vs. Frequency**

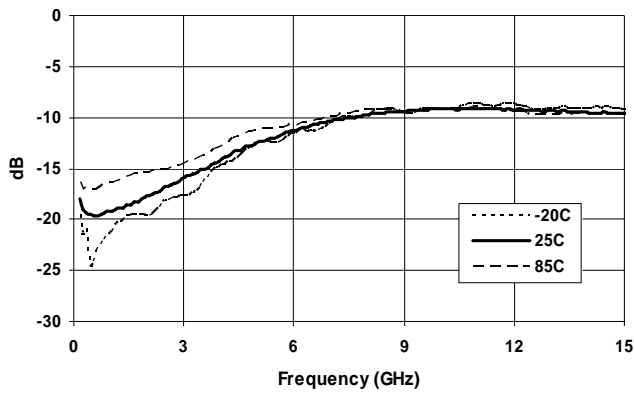


**S22 vs. Frequency**

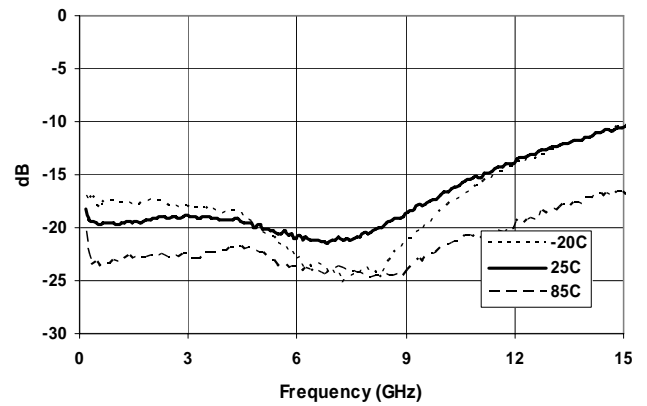

**OIP<sub>3</sub> vs. Frequency**

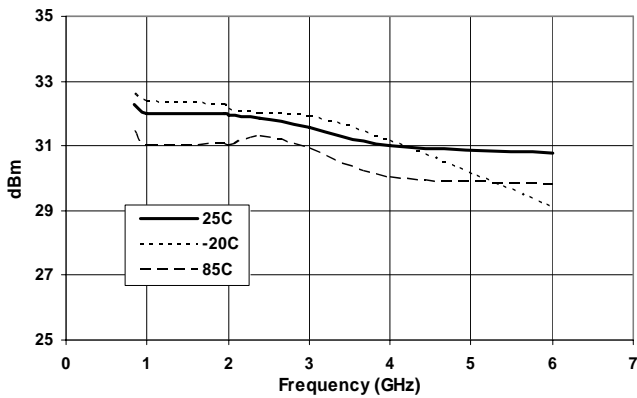

**Noise Figure vs. Frequency**

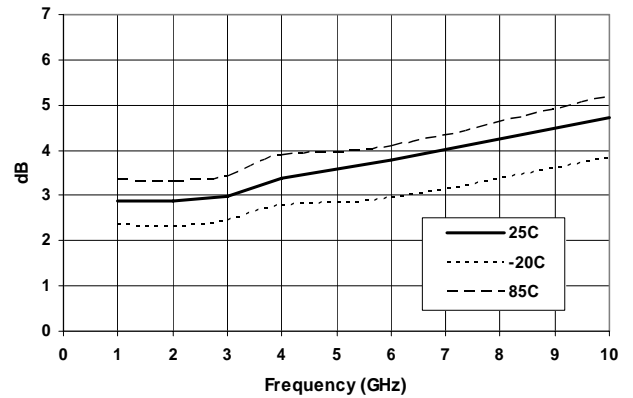

**Typical Performance (GSG Probe Data)**

Freq (GHz)	V <sub>D</sub> (V)	Current (mA)	Gain (dB)	P1dB (dBm)	OIP3 (dBm)	S11 (dB)	S22 (dB)	NF (dB)
0.15	5	73	17.0			-18.0	-18.0	
0.50	5	73	17.0			-19.5	-19.5	
0.85	5	73	17.0	21.0	32.5	-20.0	-19.0	2.8
2.0	5	73	17.0	21.0	32.0	-18.5	-18.5	2.8
4.0	5	73	16.0	20.5	31.0	-14.5	-18.5	3.3
6.0	5	73	14.5	20.0	30.5	-11.5	-20.0	3.7
10.0	5	73	11.0			-9.0	-16.5	4.7


**Test Conditions:** GSG Probe Data With Bias Tees, OIP3 Tone Spacing = 1MHz, Pout per tone = 0 dBm, 25C

Parameter	Absolute Limit
Max Device Current (I <sub>D</sub> )	80mA
Max Device Voltage (V <sub>D</sub> )	5.5V
Max RF Input Power	10dBm
Max Dissipated Power	440mW
Max Junction Temperature (T <sub>J</sub> )	150C
Operating Temperature Range (T <sub>L</sub> )	-40 to +85C
Max Storage Temp.	-65 to 150C

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.


Bias Conditions should also satisfy the following expression:

$$I_D V_D < (T_J - T_L) / R_{TH} \quad j-l \quad T_L = \text{Backside of die}$$

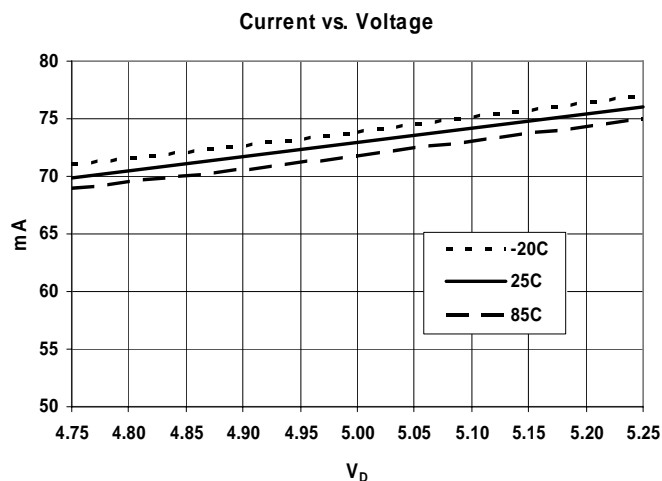**Current Variation vs. Temperature**

**ELECTROSTATIC SENSITIVE DEVICE**

Appropriate precautions in handling, packaging and testing devices must be observed.
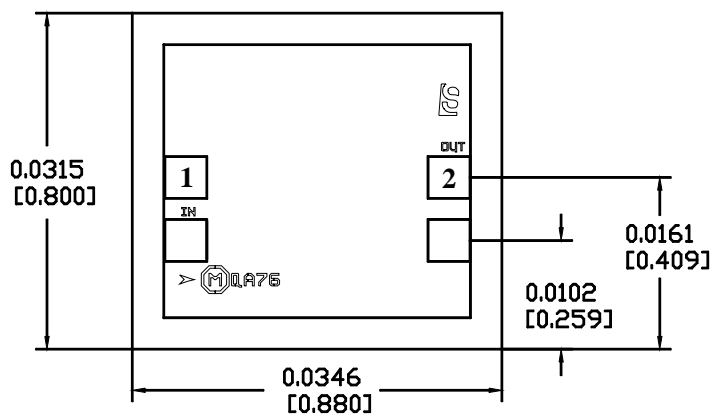
## Pad Description



Pad #	Function	Description
1	RF <sub>IN</sub>	This pad is DC coupled and matched to 50 Ohms. An external DC block is required.
2	RF <sub>OUT</sub> / Bias	This pad is DC coupled and matched to 50 Ohms. Bias is applied through this pad.
Die Bottom	GND	Die bottom must be connected to RF/DC ground using silver-filled conductive epoxy.

### Notes:

1. All Dimensions in Inches [Millimeters].
2. No connection required for unlabeled bond pads.
3. Die Thickness is 0.004 (0.100).
4. Typical bond pad is 0.004 (0.100) square.
5. Backside metalization: Gold.
6. Backside is Ground.
7. Bond pad metalization: Gold.

## Device Assembly

