
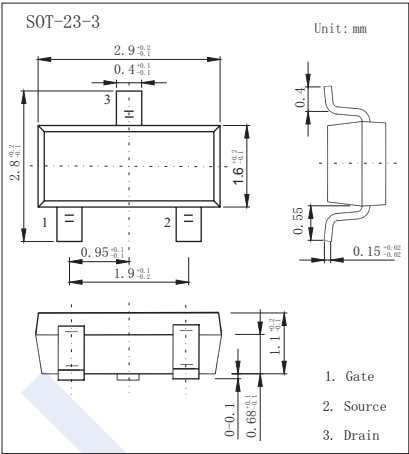


P-Channel Enhancement MOSFET
2SJ3021

■ Features

- $V_{DS}(V) \approx -30V$
- $I_D \approx -4.2\text{ A}$ ($V_{GS} \approx -10V$)
- $R_{DS(ON)} < 50m\Omega$ ($V_{GS} \approx -10V$)
- $R_{DS(ON)} < 65m\Omega$ ($V_{GS} \approx -4.5V$)
- $R_{DS(ON)} < 120m\Omega$ ($V_{GS} \approx -2.5V$)



■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 12	
Continuous Drain Current $T_a = 25^\circ\text{C}$ $T_a = 70^\circ\text{C}$	I_D	-4.2	A
		-3.5	
Pulsed Drain Current	I_{DM}	-30	
Power Dissipation $T_a = 25^\circ\text{C}$ $T_a = 70^\circ\text{C}$	P_D	1.4	W
		1	
Thermal Resistance.Junction- to-Ambient $t \leq 10s$	R_{thJA}	90	$^\circ\text{C/W}$
Thermal Resistance.Junction- to-Ambient		125	
Thermal Resistance.Junction- to-Case	R_{thJC}	60	
Junction Temperature	T_J	150	$^\circ\text{C}$
Junction and Storage Temperature Range	T_{stg}	-55 to 150	

P-Channel Enhancement MOSFET

2SJ3021

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{DSS}	I _D =-250μ A, V _{GS} =0V	-30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-24V, V _{GS} =0V			-1	μ A
		V _{DS} =-24V, V _{GS} =0V, T _J =55°C			-5	
Gate-Body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =± 12V			± 100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =-250μ A	-0.4		-1.3	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =-10V, I _D =-4.2A			50	mΩ
		V _{GS} =-10V, I _D =-4.2A T _J =125°C			75	
		V _{GS} =-4.5V, I _D =-4A			65	
		V _{GS} =-2.5V, I _D =-1A			120	
On state drain current	I _{D(ON)}	V _{GS} =-4.5V, V _{DS} =-5V	-25			A
Forward Transconductance	g _{FS}	V _{DS} =-5V, I _D =-5A	7	11		S
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =-15V, f=1MHz		954		pF
Output Capacitance	C _{oss}			115		
Reverse Transfer Capacitance	C _{rss}			77		
Gate resistance	R _g	V _{GS} =0V, V _{DS} =0V, f=1MHz		6		Ω
Total Gate Charge	Q _g	V _{GS} =-4.5V, V _{DS} =-15V, I _D =-4A		9.4		nC
Gate Source Charge	Q _{gs}			2		
Gate Drain Charge	Q _{gd}			3		
Turn-On DelayTime	t _{d(on)}	V _{GS} =-10V, V _{DS} =-15V, R _L =3.6Ω ,R _{GEN} =6Ω		6.3		ns
Turn-On Rise Time	t _r			3.2		
Turn-Off DelayTime	t _{d(off)}			38.3		
Turn-Off Fall Time	t _f			12		
Body Diode Reverse Recovery Time	t _{rr}	I _F =-4A, dI/dt=100A/μ s		20.2		nC
Body Diode Reverse Recovery Charge	Q _{rr}	I _F =5A, dI/dt=100A/μ s		11.2		
Maximum Body-Diode Continuous Current	I _S				-2.2	A
Diode Forward Voltage	V _{SD}	I _S =-1A, V _{GS} =0V			-1	V

■ Marking

Marking	A1*
---------	-----

P-Channel Enhancement MOSFET

2SJ3021

Typical Characteristics

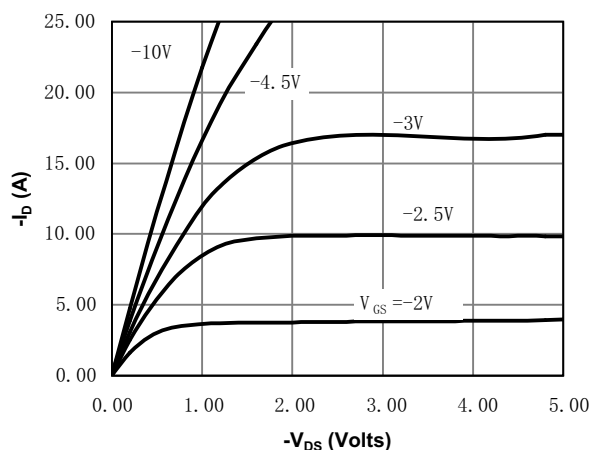


Fig 1: On-Region Characteristics

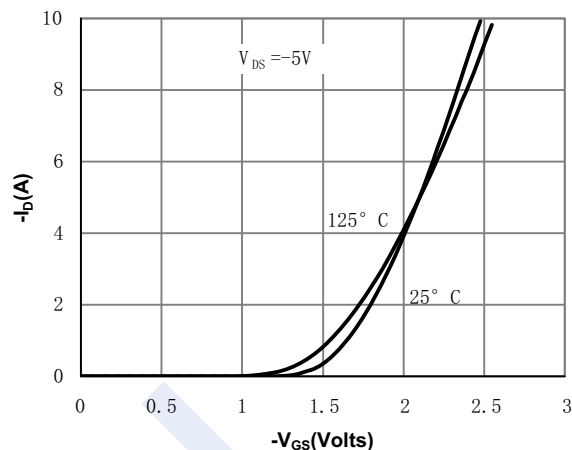


Figure 2: Transfer Characteristics

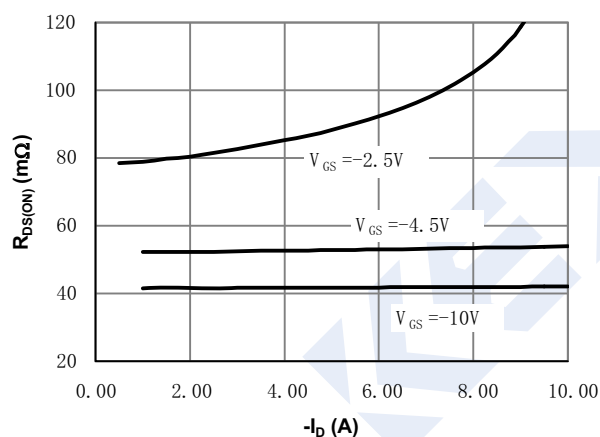


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

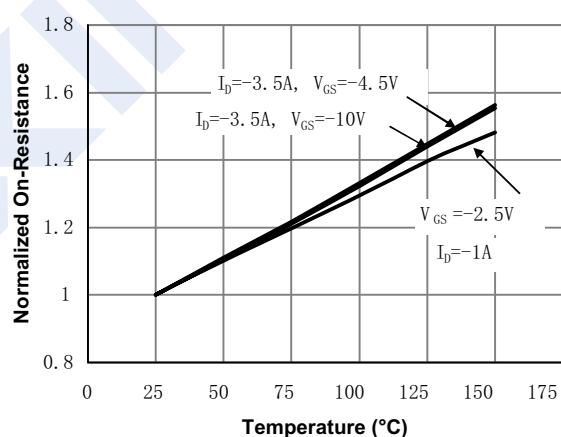


Figure 4: On-Resistance vs. Junction Temperature

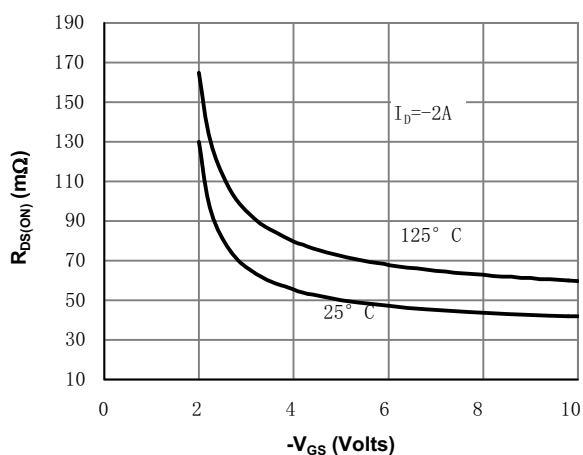


Figure 5: On-Resistance vs. Gate-Source Voltage

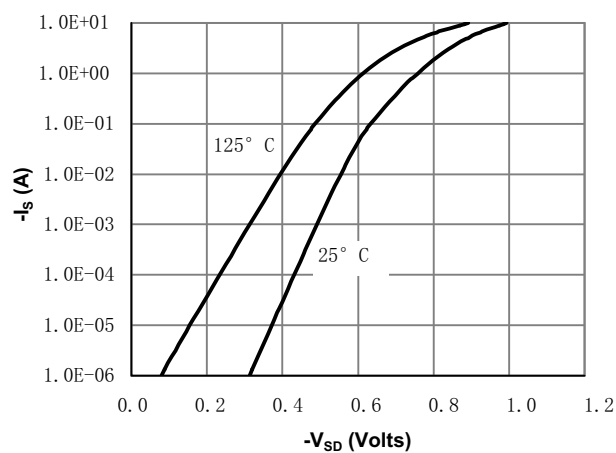


Figure 6: Body-Diode Characteristics

P-Channel Enhancement MOSFET

2SJ3021

■ Typical Characteristics

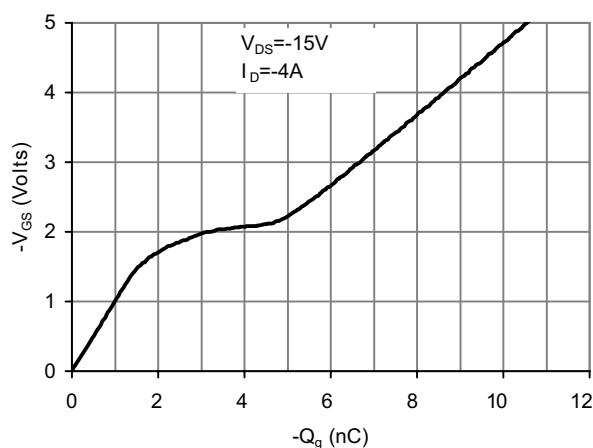


Figure 7: Gate-Charge Characteristics

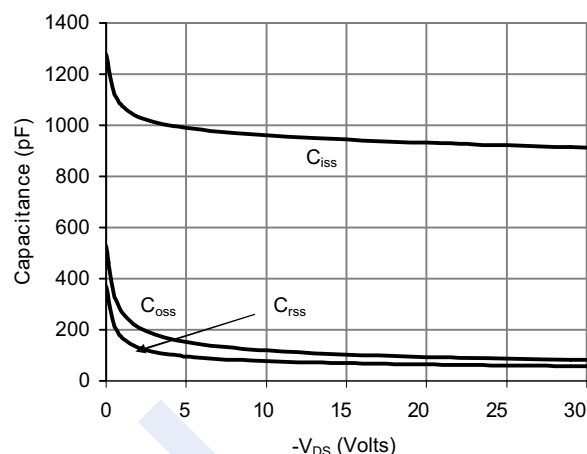


Figure 8: Capacitance Characteristics

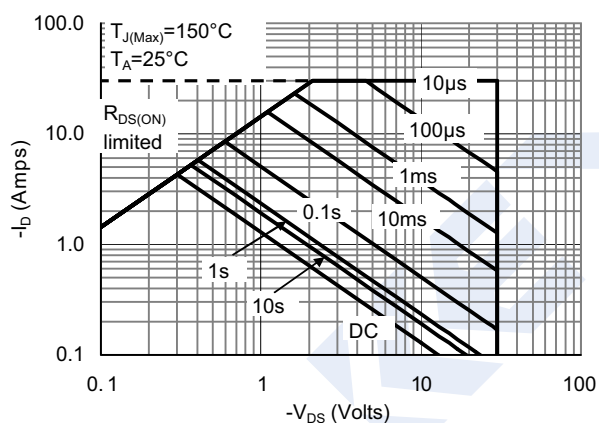


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

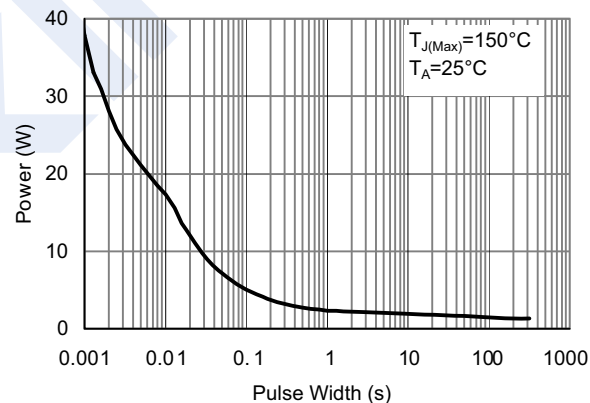


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

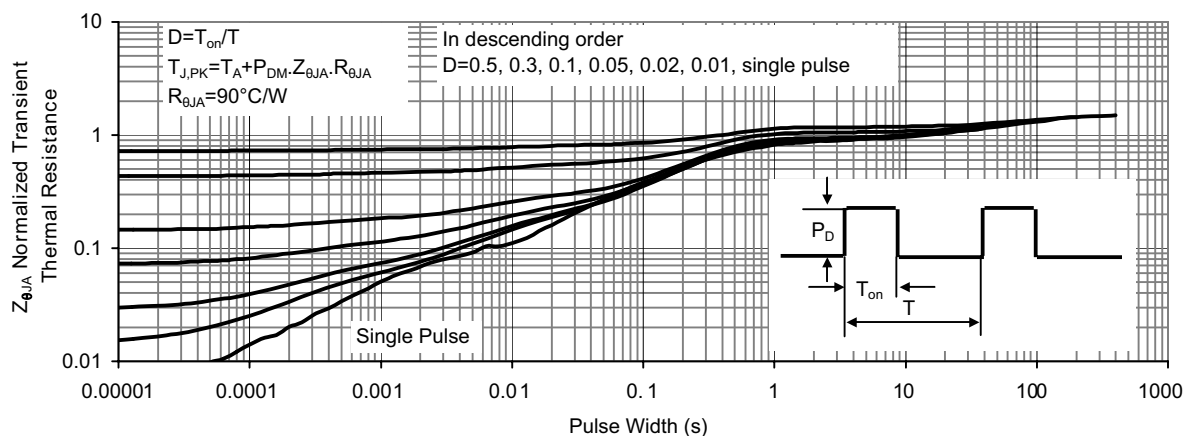


Figure 11: Normalized Maximum Transient Thermal Impedance