


### Applications


- Radar
- Communications

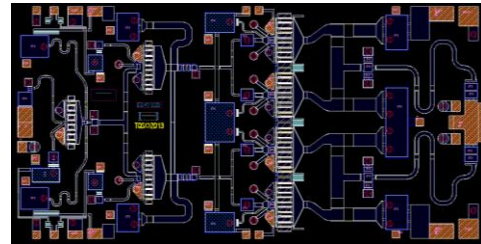

### Product Features

- Frequency Range: 10 – 11GHz
- $P_{SAT}$ : 43dBm @  $PIN = 15dBm$
- $P1dB$ : >40dBm
- PAE: >42% @  $PIN = 15dBm$
- Large Signal Gain: 28dB
- Small Signal Gain: 37dB
- Return Loss: >11dB
- Bias:  $V_D = 28V$ ,  $I_{DQ} = 365mA$ ,  $V_G = -2.5V$  Typical
- Pulsed  $V_D$ :  $PW = 100\mu s$  and  $DC = 10\%$
- Chip Dimensions: 5.0 x 2.62 x 0.10 mm

### Functional Block Diagram

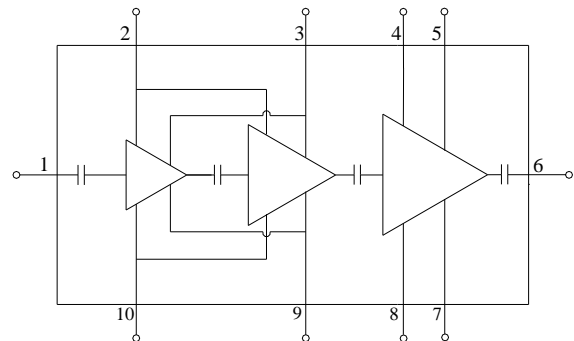

### General Description

TriQuint's TGA2625 is an x-band, high power MMIC amplifier fabricated on TriQuint's production 0.25um GaN on SiC process. The TGA2625 operates from 10–11GHz and provides a superior combination of power, gain and efficiency. Achieving 20W of saturated output power with 28dB of large signal gain and greater than 42% power-added efficiency, the TGA2625 provides the level of performance demanded by today's system architectures. Depending on the system requirements, the TGA2625 can support cost saving initiatives on existing systems while supporting next generation systems with increased performance.

Lead-free and RoHS compliant.

Evaluation boards are available upon request.

### Pad Configuration

Pad No.	Symbol
1	RF In
2, 10	$V_{G1-2}$
4, 8	$V_{G3}$
3, 9	$V_{D1-2}$
5, 7	$V_{D3}$
6	RF Out

### Ordering Information

Part	ECCN	Description
TGA2625	3A001.b.2.b	10 – 11GHz 20W GaN Power Amplifier

### Absolute Maximum Ratings

Parameter	Value
Drain Voltage ( $V_D$ )	40V
Gate Voltage Range ( $V_G$ )	-5 to 0V
Drain Current ( $I_{D1-2}$ )	1.65A
Drain Current ( $I_{D3}$ )	2.15A
Gate Current ( $I_{G1-2}$ )	-2 to 10mA
Gate Current ( $I_{G3}$ )	-6 to 14mA
Power Dissipation ( $P_{DISS}$ ), 85°C	49W
Input Power ( $P_{IN}$ ), CW, 50Ω, $V_D = 28V$ , 85°C	25dBm
Input Power ( $P_{IN}$ ), CW, VSWR 6:1, $V_D = 28V$ , 85°C	19dBm
Channel Temperature ( $T_{CH}$ )	275°C
Mounting Temperature (30 seconds)	320°C
Storage Temperature	-55 to 150°C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Recommended Operating Conditions

Parameter	Value
Drain Voltage ( $V_D$ )	28V
Drain Current ( $I_{DQ}$ )	365mA (Total)
Gate Voltage ( $V_G$ )	-2.5V (Typ.)

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

### Electrical Specifications

Test conditions unless otherwise noted: 25°C,  $V_D = 28V$ ,  $I_{DQ} = 365mA$ ,  $V_G = -2.5V$  Typical, Pulsed  $V_D$ . PW = 100us, DC = 10%

Parameter	Min	Typical	Max	Units
Operational Frequency Range	10		11	GHz
Small Signal Gain		37		dB
Input Return Loss		>12		dB
Output Return Loss		>11		dB
Output Power ( $P_{in} = 15dBm$ )		43		dBm
Power Added Efficiency ( $P_{in} = 15dBm$ )		>42		%
Power @ 1dB Compression ( $P_{1dB}$ )		>40		dBm
Small Signal Gain Temperature Coefficient		-0.05		dB/°C
Recommended Operating Voltage:	20	28	32	V

### Thermal and Reliability Information


Parameter	Test Conditions	Value	Units
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85^{\circ}\text{C}$ , Pulsed $V_D$ : PW = 100us, DC = 10%	2.67	$^{\circ}\text{C/W}$
Channel Temperature ( $T_{CH}$ ) (Under RF drive)	$T_{base} = 85^{\circ}\text{C}$ , $V_D = 28\text{V}$ , $I_{D\_Drive} = 1.7\text{A}$ , $P_{IN} = 17\text{dBm}$ , $P_{OUT} = 43\text{dBm}$ , $P_{DISS} = 28\text{W}$ , Pulsed $V_D$	160	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )		$5.98 \times 10^9$	Hrs
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85^{\circ}\text{C}$ , CW	3.92	$^{\circ}\text{C/W}$
Channel Temperature ( $T_{CH}$ ) (Under RF drive)	$T_{base} = 85^{\circ}\text{C}$ , $V_D = 28\text{V}$ , $I_{D\_Drive} = 1.55\text{A}$ , $P_{IN} = 17\text{dBm}$ , $P_{OUT} = 42\text{dBm}$ , $P_{DISS} = 28\text{W}$ , CW	195	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )		$1.98 \times 10^7$	Hrs

Notes:






- Thermal resistance measured to back of carrier plate. MMIC mounted on 40 mils CuM (85/15) carrier using 1.5 mil AuSn.

### Median Lifetime







Test Conditions:  $V_D = 40\text{V}$ ; Failure Criteria = 10% reduction in  $I_{D\_MAX}$

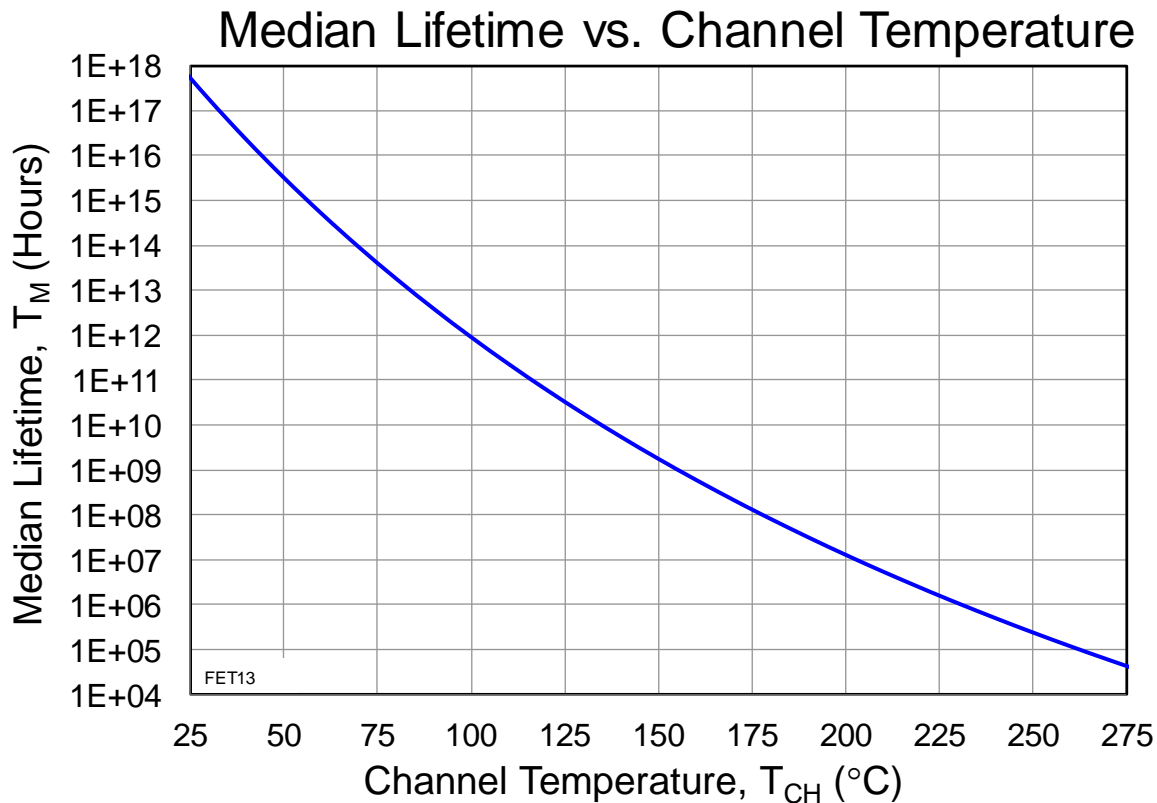







**Typical Performance (Small Signal)**

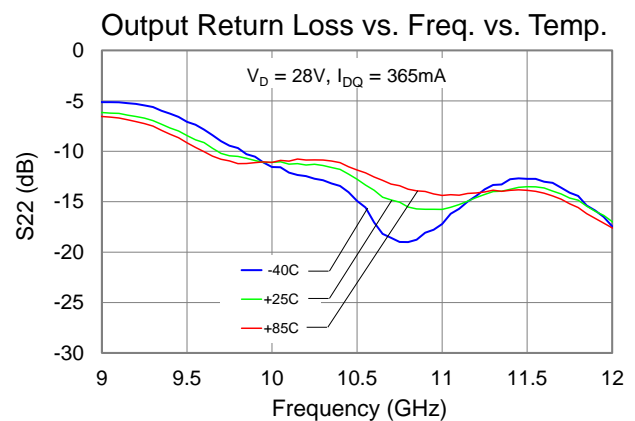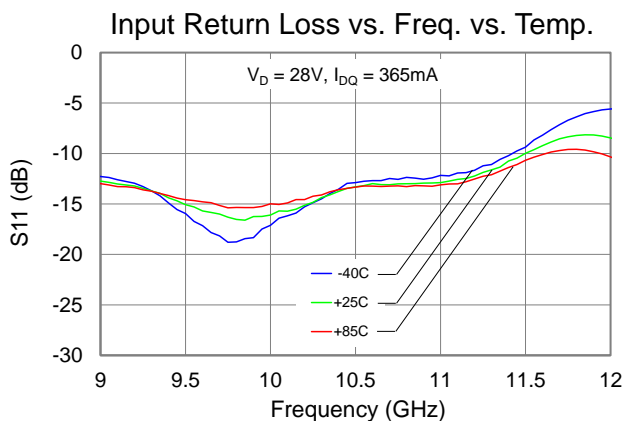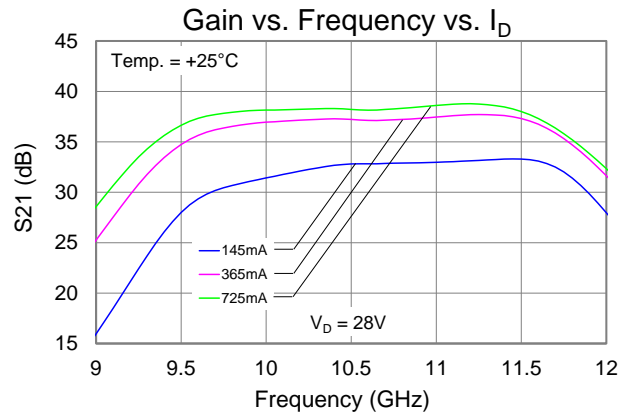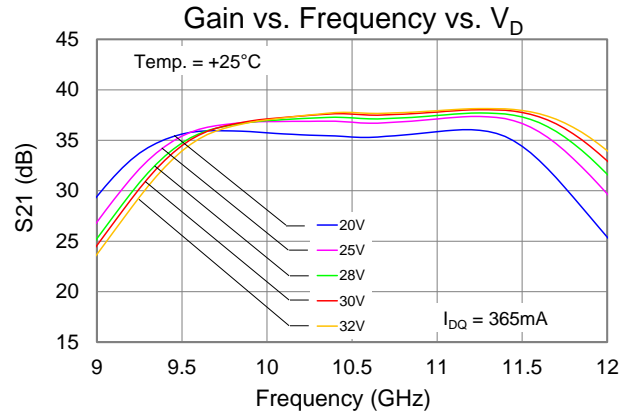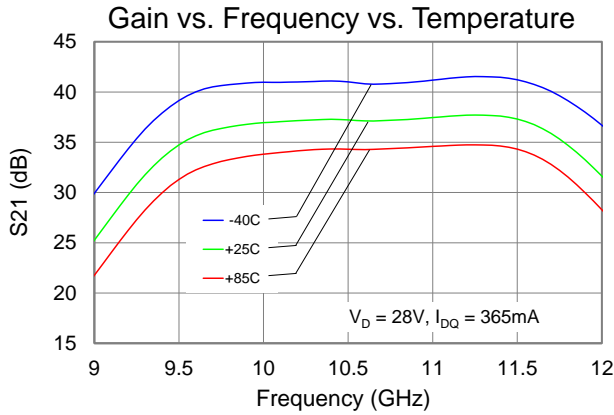







### Typical Performance (Pulsed Operation)

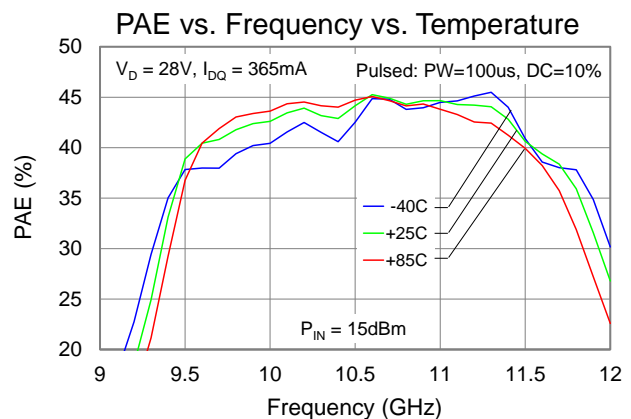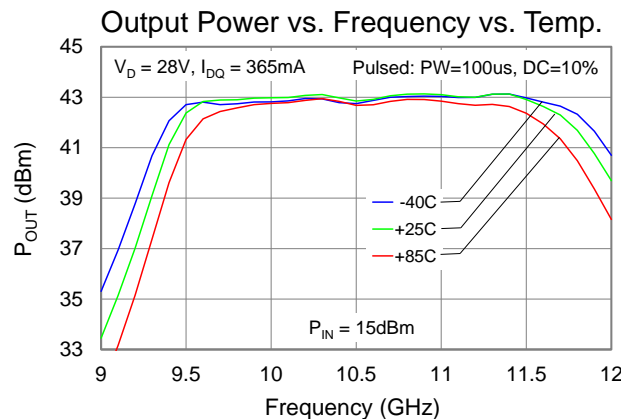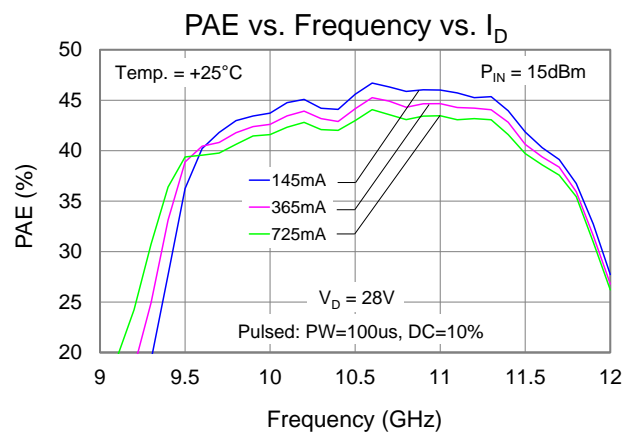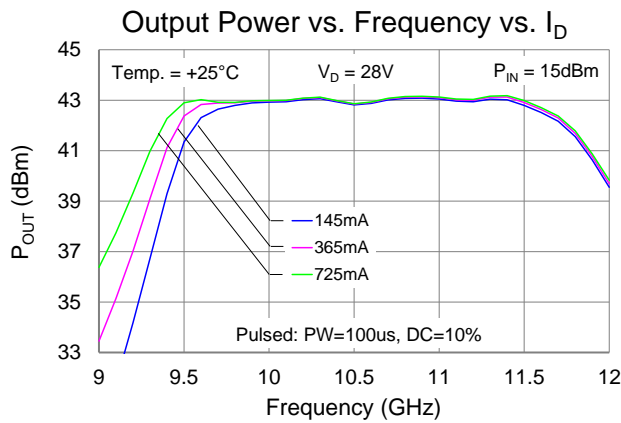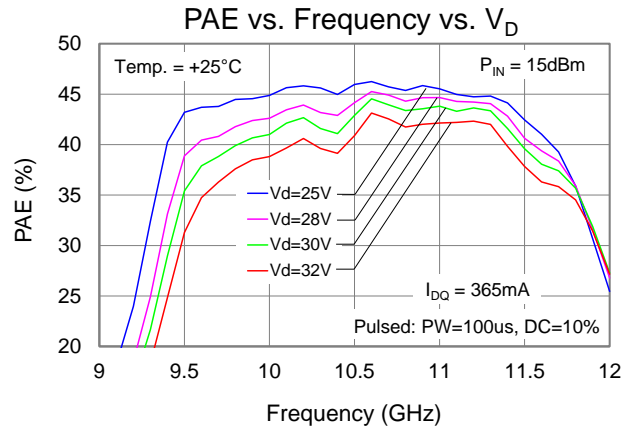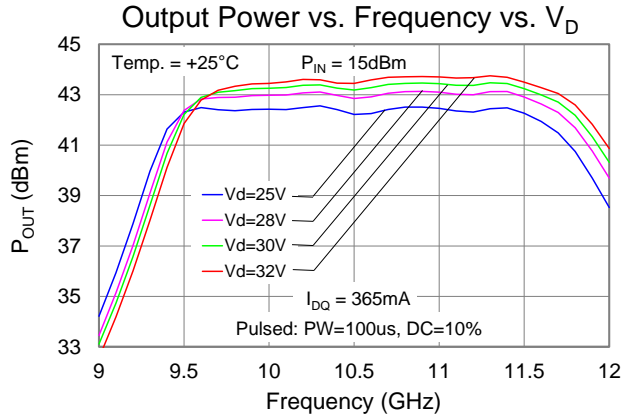







### Typical Performance (Pulsed Operation)

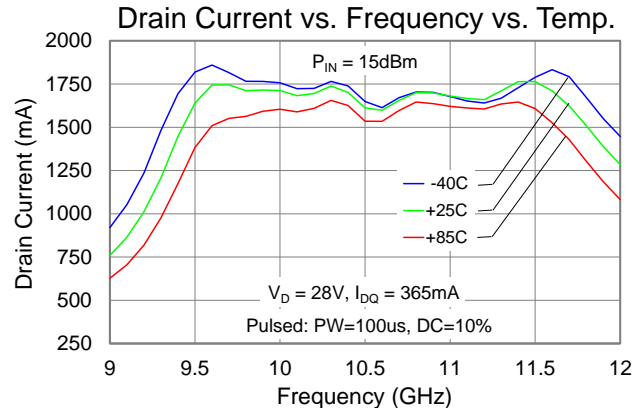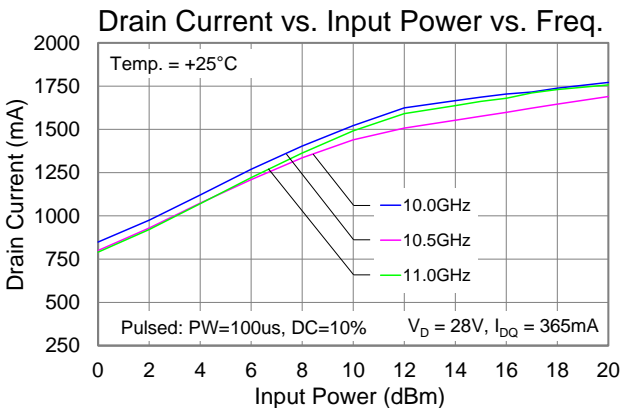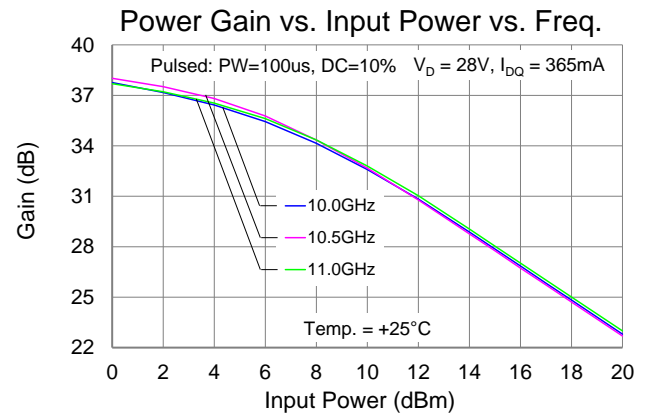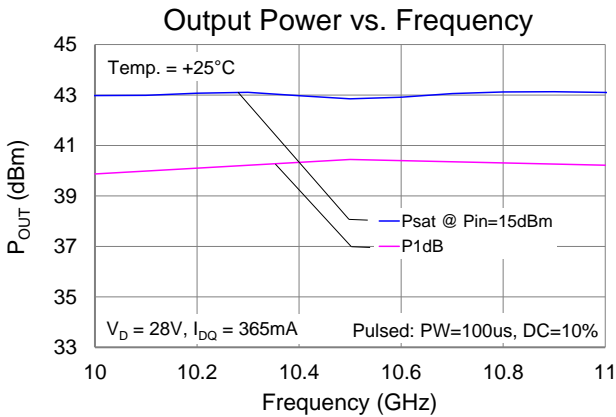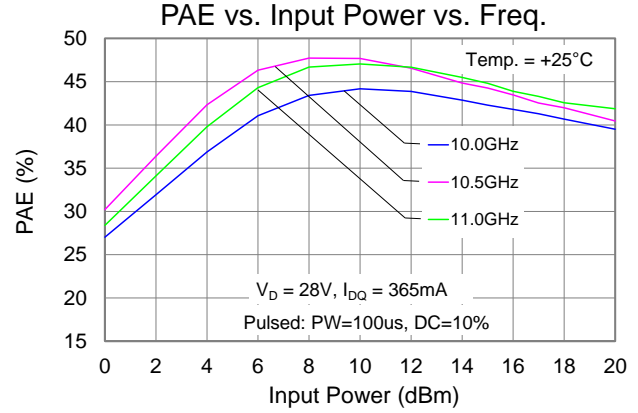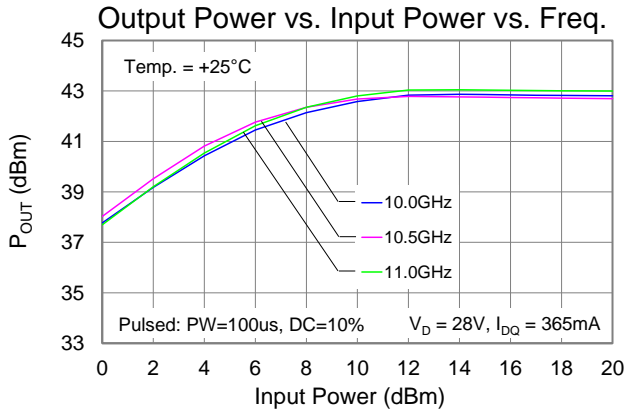

### Typical Performance (CW Operation)

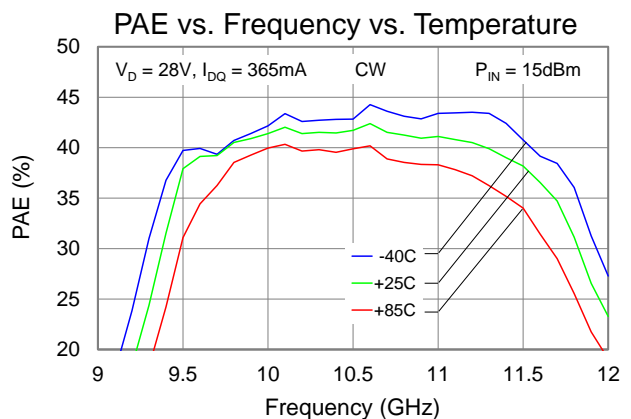
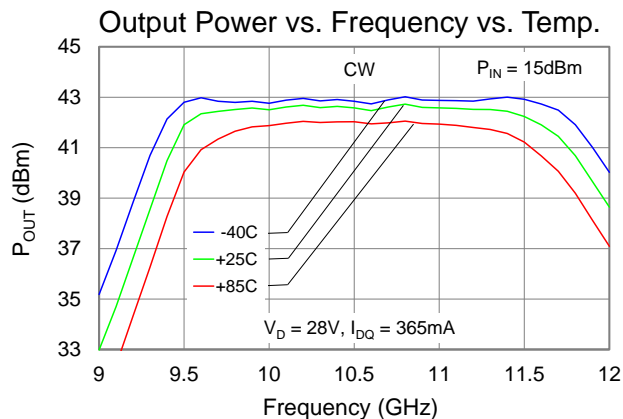
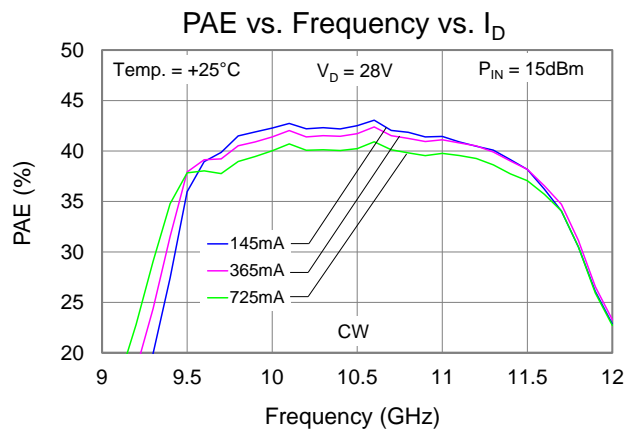
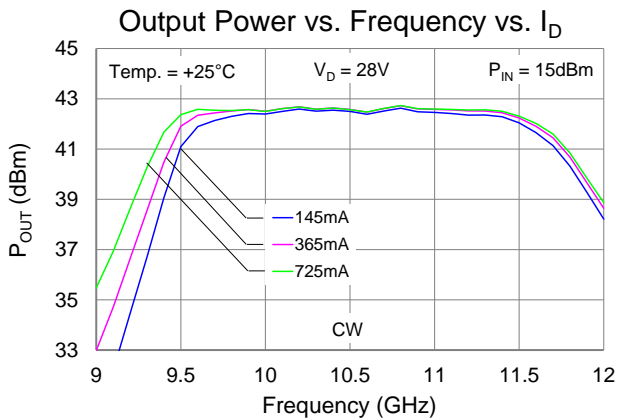
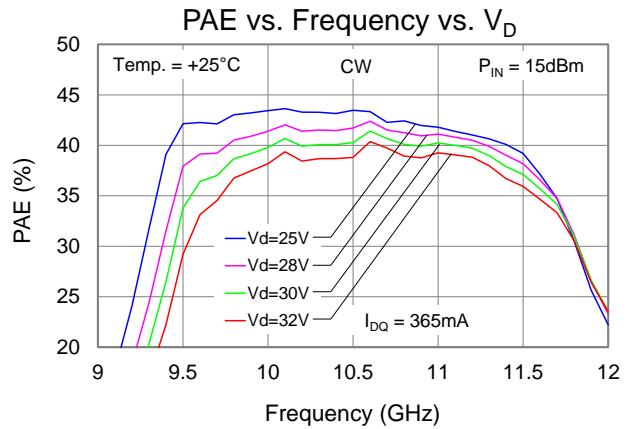
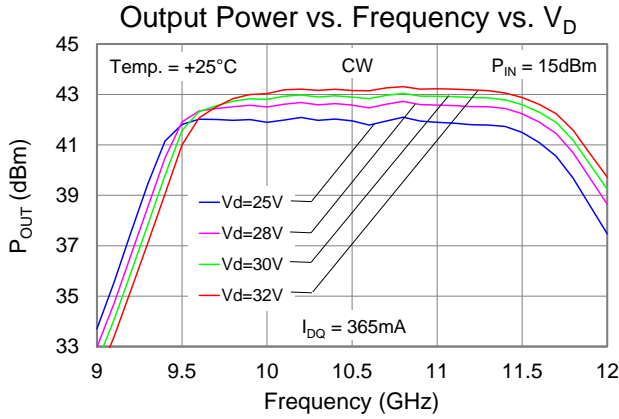


### Typical Performance (CW Operation)

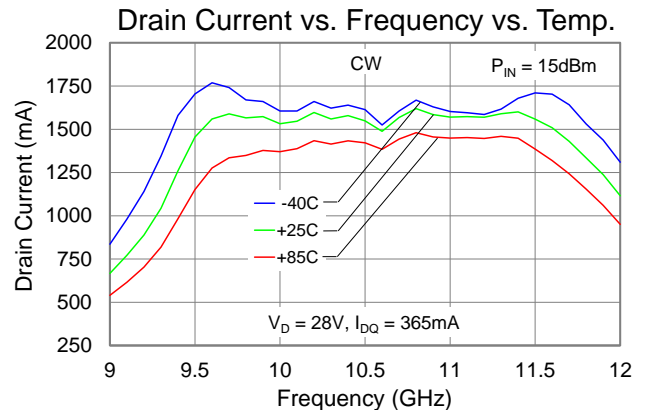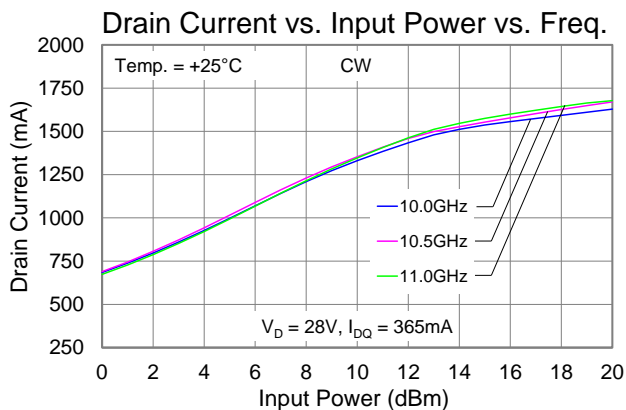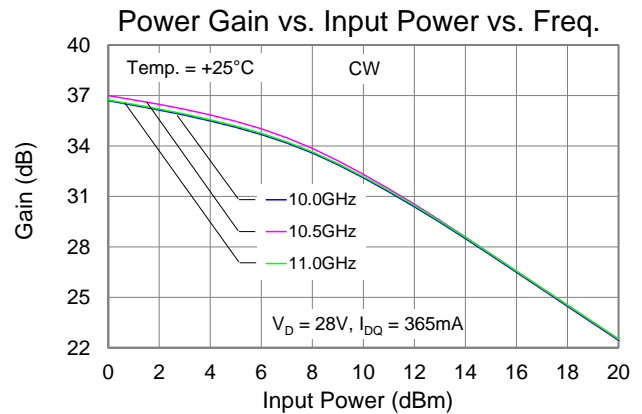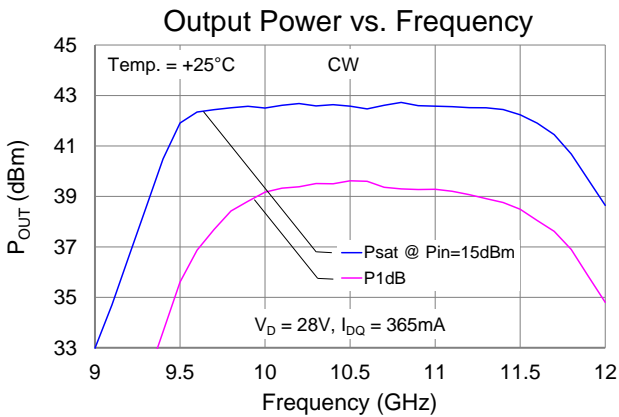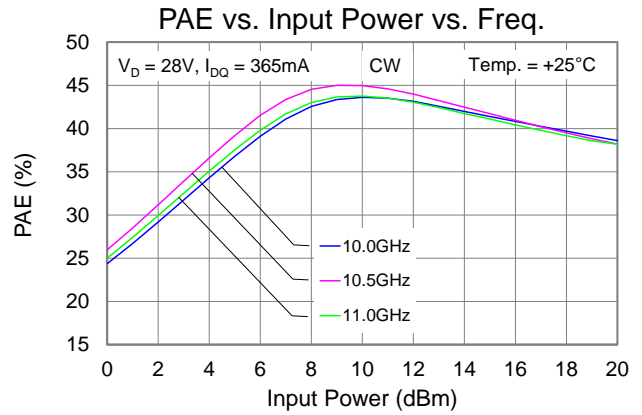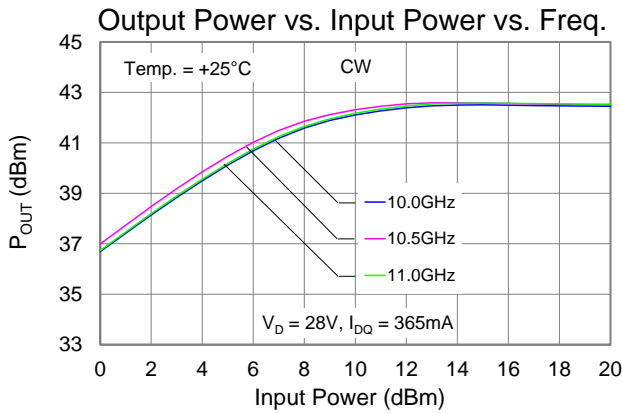




**Typical Performance (Linearity)**

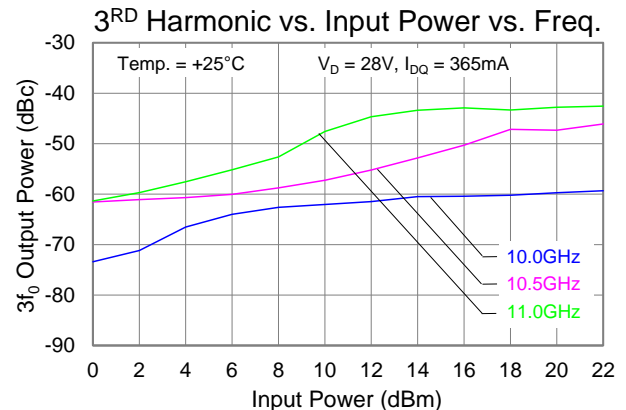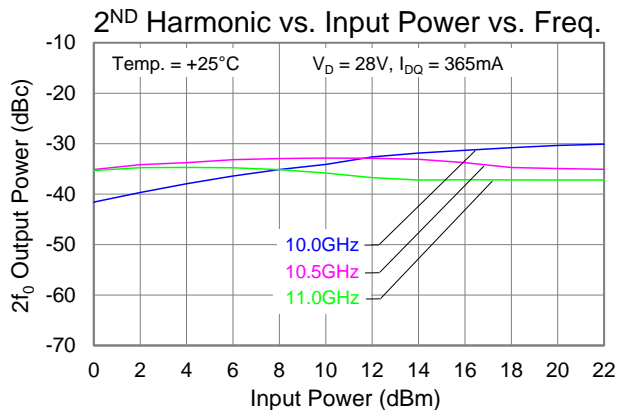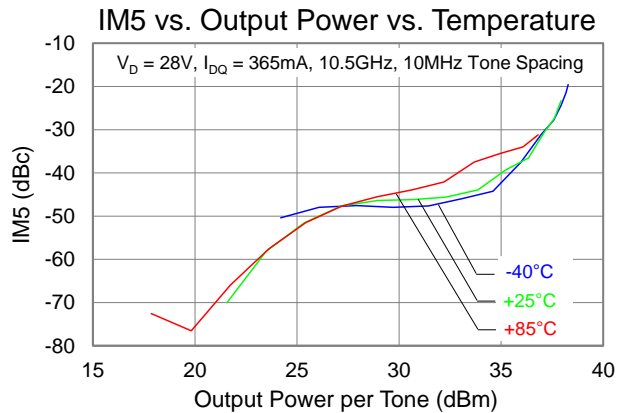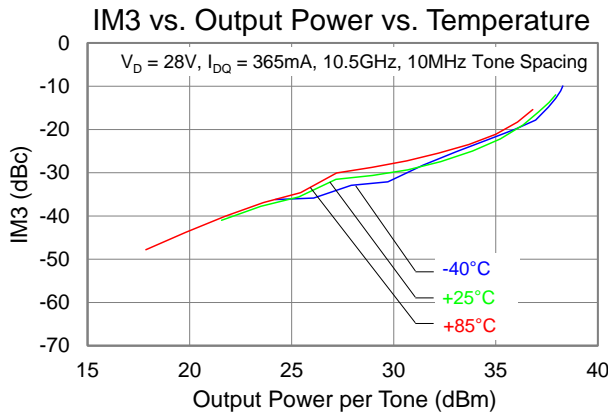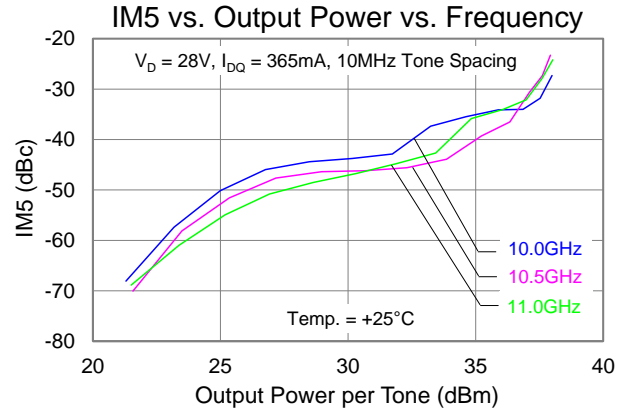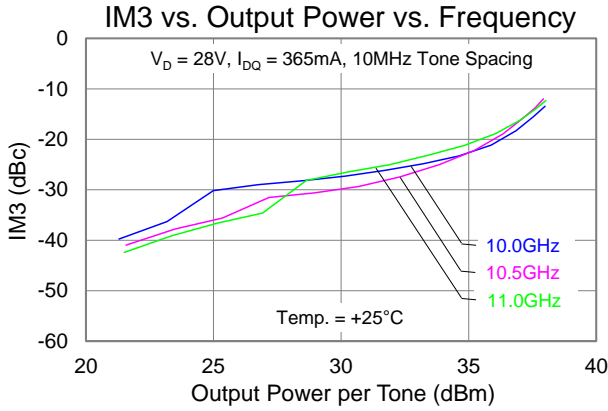



## Evaluation Board (EVB) Layout Assembly

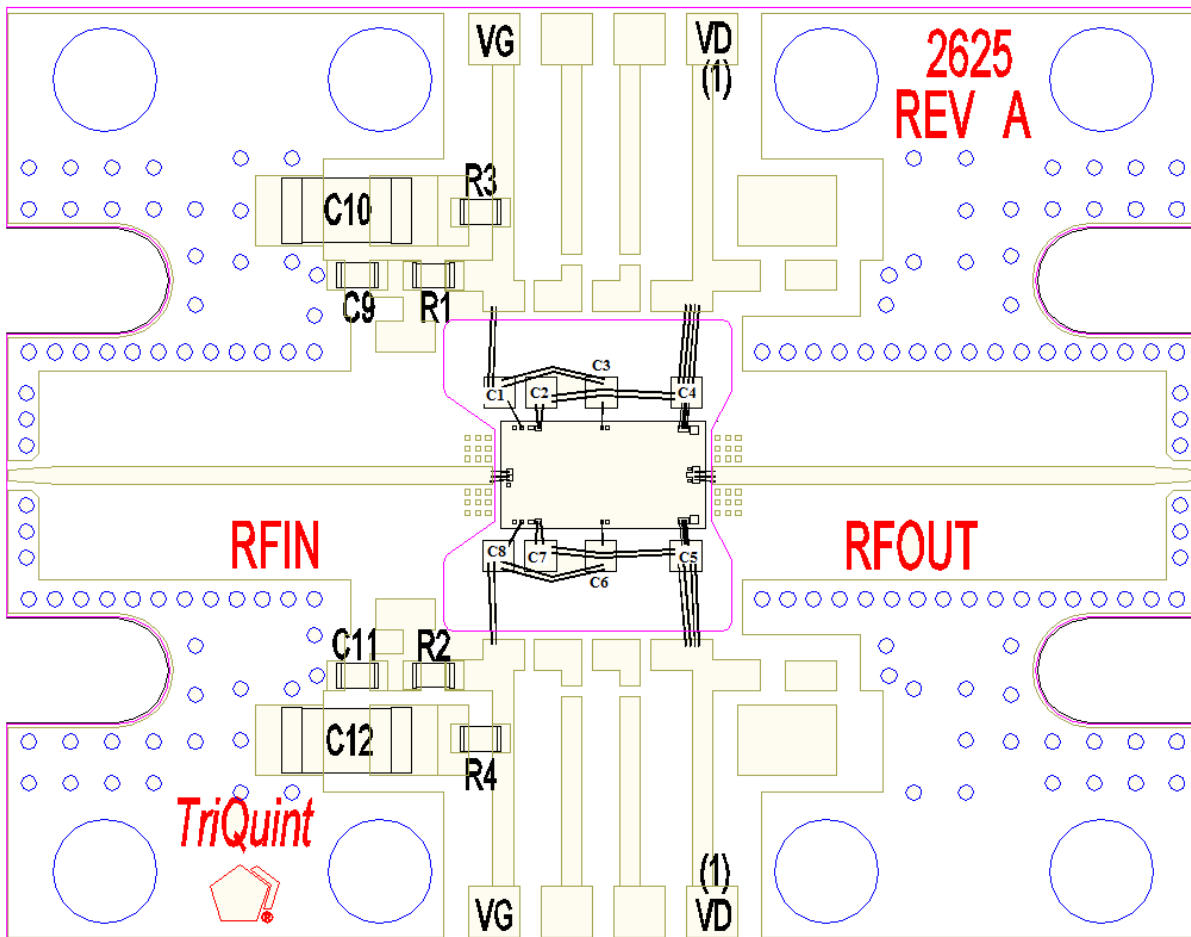


Notes:

1. 100uF/100V charge storage cap is needed on the drain. For pulsed operation this cap must be on the supply-side of the pulse-modulator.

### Bill of Materials

Reference Design	Value	Description	Manufacturer	Part Number
C1 – C8	1000pF	SLC, 50V	Various	
C9, C11	0.1uF	Cap, 0402, 50V, 10%, X7R	Various	
C10, C12	47uF	Cap, 1206, 50V, 10%, X7R	Various	
R1 – R2	10Ω	Res, 0402	Various	
R3 – R4	0Ω	Res, 0402	Various	

### Mechanical Drawing & Bond Pad Description

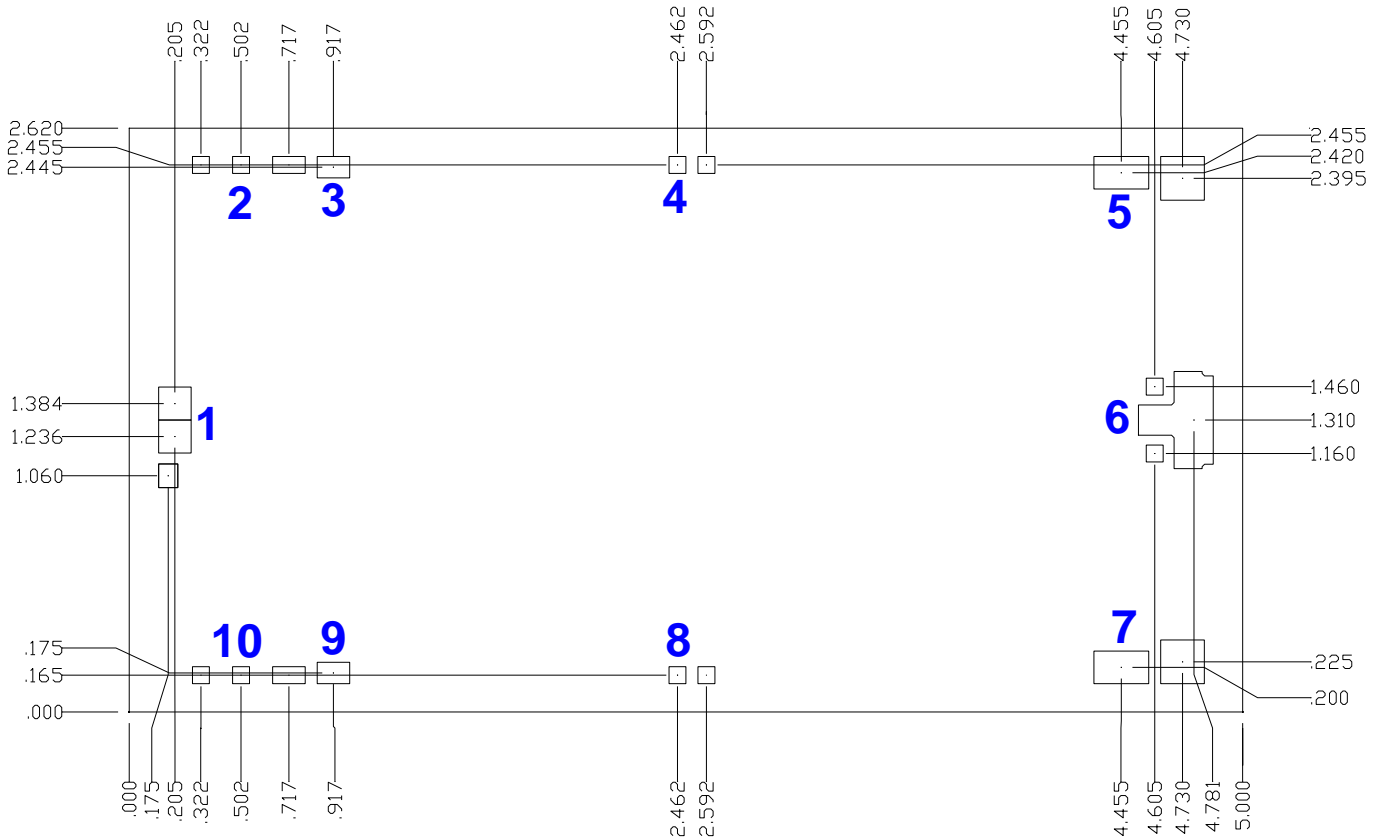

Unit: millimeters  
 Thickness: 0.10  
 Die x, y size tolerance: +/- 0.050  
 Chip edge to bond pad dimensions are shown to center of pad  
 Ground is backside of die

Bond Pad	Symbol	Pad Size	Description
1	RF In	0.150 x 0.300	RF Input; matched to 50Ω; DC Blocked
2, 8	VG1-2	0.080 x 0.080	Gate voltage 1, bias network is required; see Application Circuit on page 10 as an example.
4, 10	VG3	0.080 x 0.080	Gate voltage 3, bias network is required; see Application Circuit on page 10 as an example.
3, 9	VD1-2	0.150 x 0.100	Drain voltage 1, bias network is required; see Application Circuit on page 10 as an example.
5, 7	VD3	0.250 x 0.150	Drain voltage 3, bias network is required; see Application Circuit on page 10 as an example.
6	RF Out	0.180 x 0.350	RF Output; matched to 50Ω; DC Blocked

## Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e. epoxy) can be used in low-power applications.
- Curing should be done in a convection oven; proper exhaust is a safety concern.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonic are critical parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

## Product Compliance Information

### ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: TBD  
Value: TBD  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JESD22-A114

### ECCN

US Department of State: 3A001.b.2.b

### Solderability

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)  
Email: [info-sales@triquint.com](mailto:info-sales@triquint.com)

Tel: +1.972.994.8465  
Fax: +1.972.994.8504

For technical questions and application information: Email: [info-products@triquint.com](mailto:info-products@triquint.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.