

TI1704WM-03 INVERTER ELECTRICAL SPECIFICATION

1. APPLICATION

This specification is applied to CCFL inverter unit for 19" 4L color LCD backlight.
 Panel Type : AU M170EG01 V.9 & AU M170EG01 V.A & AU M170EG01 V.D &
 AU M190EN04 V.7 & AU M190EG02 V.4 & Samsung LTM190EP01 A01
 & Samsung LTM190EX-L35 Rev. PNO & CMO M190E5-L0A Rev.C1

2. ELECTRICAL CHARACTERISTICS

NO.	Item	Symbol	Condition	Min.	Typ.	Max.	Unit
1	Input Voltage	Vin		10.8	12.0	13.2	V
2	Input Current	Iin	Vin= 12 V, Vadj= 0 V (4 Lamp)	---	---	2.5	A
3	Inrush Current	Iin	Vin= --- V, Vadj= --- V (Imax)	---	---	3.5	A
4	Input Power	Pin	Vin= --- V, Vadj= --- V (--- Lamp)	---	---	---	W
5	Backlight	Von	Normal Operation	4.0	---	5.0	V
	ON/OFF Control	Voff	Shutdown	0	---	1.2	V
6	Brightness Adjust (Lamp Current Control)	Vadj	Normal Operation	5	---	0	V
7	Output Voltage	Vout	Vin= 12 V, Iout= 7.5 mA (1 Lamp) (REF,VALUE)	---	760	---	Vrms
8	Output Current (Each Connector)	Iout(Max)	Vin= 12 V, Vadj= 0 V (1 Lamp) Ta= 25 °C, After running 30min.	7.0	7.5	8.0	mArms
		Iout(Min)	Vin= 12 V, Vadj= 5.0 V (1 Lamp) Ta= 25 °C, After running 30min.	2.0	2.5	3.0	mArms
9	Burst Frequency	Freq	Vin= --- V, Vadj= --- V	---	---	---	Hz
10	Frequency	Freq	Normal Operation	40	50	60	KHz
11	Lamp Start Voltage	Vopen	No Load, Vin= 12 V, Ta= 0 °C	1000	---	2200	Vrms
12	Efficiency	η	Vin= 12 V, Load= Panel	75	---	---	%
13	Striking time	Tscp	Vin= 12 V, Vadj= 0 V	1	---	2	Sec
14	Open Lamp Protection	Latched					
15	Short Lamp Protection	Latched					

Note1 : lamp start voltage is tested under all lamp opened Circuit, with Hv Probe.

Note2 : The SPEC of lamp start voltage is reference test solution of a 10cm Hv-wire connected to Hv Probe to simulate lamp wire.

MODEL NAME	TI1704WM-03	DATE	2010/4/19	Code.	J	REV.	B
------------	-------------	------	-----------	-------	---	------	---



3. INTERFACE SPECIFICATION

Input Connector : CON1
: CS JS-1261R-06(NM) or equ

Pin No.	Signal	Description
1	Vin	Input Voltage
2	Vin	Input Voltage
3	GND	Power System Return
4	Vbri	Lamp Control
5	GND	Power System Return
6	ON/OFF	ON / OFF Control

Output Connector : CON2,CON3,CON4,CON5
: CS JS-2012-02(NM) or equ.

Pin No.	Signal	Description
1	Lamp High	High Voltage Output For High Side CCFL
2	Lamp Low	Low Voltage Output For Low Side CCFL


4. ENVIRONMENT

Operation Temperature	-10 ~ 45 °C
Operation Humidity	90 % Max. RH
Storage Temperature	- 10 ~ 85 °C
Storage Humidity	95 % Max. RH

5. TEST EQUIPMENT

Dc Power Supply	☒ Toward 6303D	☐ Toward 3306D
Scope	☐ Tektronix TDS1012	☐ Tektronix TDS-360 ☒ Tektronix TDS2024
	☐ Tektronix TDS 3032B	☐ Tektronix DPO 4032
High Voltage Probe	☒ Tektronix P6015A (1000x3.0pF 100MΩ)	
Current Probe	☐ Tektronix TM502A	☐ Tektronix A6302 ☒ Tektronix P6022
	☒ FLUKE45	

MODEL NAME	TI1704WM-03	DATE	2010/4/19	Code.	J	REV.	B
------------	-------------	------	-----------	-------	---	------	---

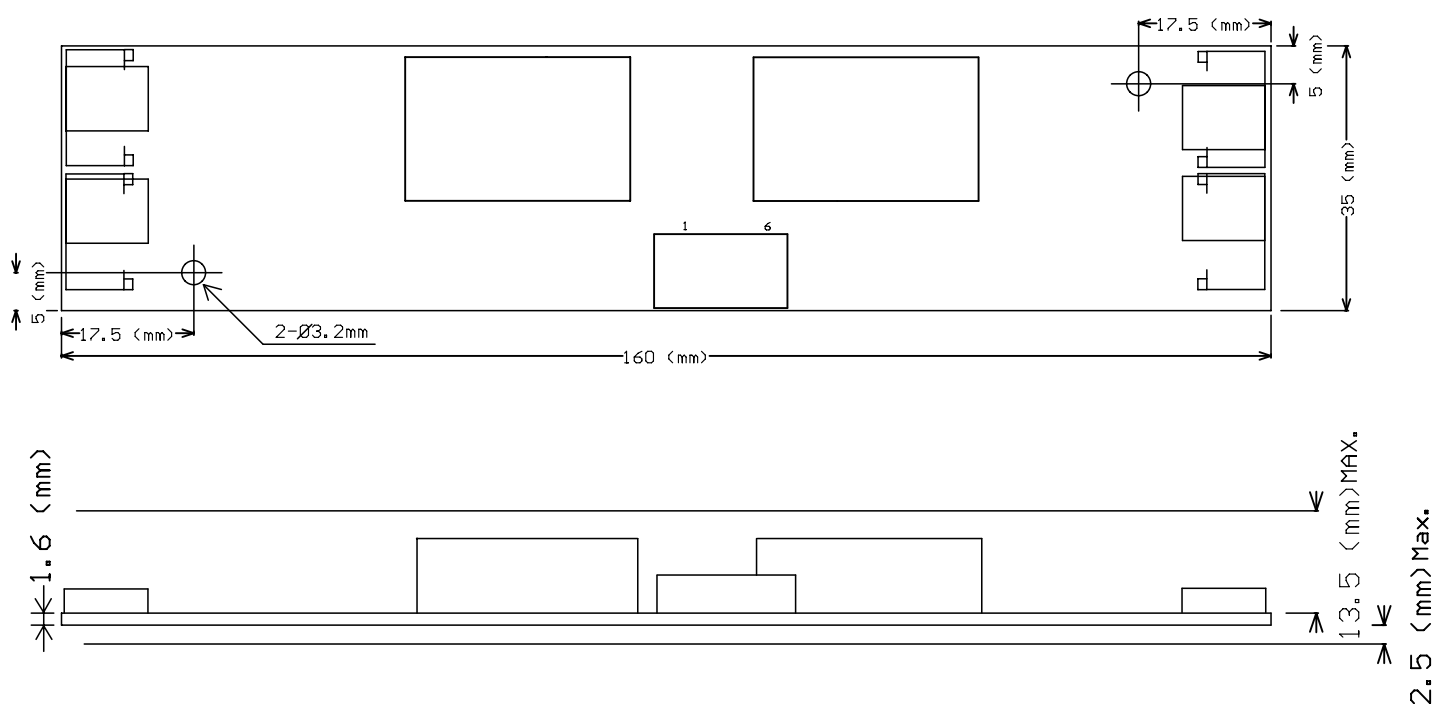

TPEI		TAIWAN POWER CONVERSION INC., LTD			
FILE NAME:		T11704WM-03			
DATE:		99/07/12			
Dimension:		160 x 35mm (+/-0.5mm)			
PCB Material Tolerance (mm)		TOLERANCE DIM(mm)			
T	1.0	1.2	1.6	XL	+/-0.5
FR4	+0.20/-0.13	+0.20/-0.13	+0.20/-0.13	XX	+/-0.25
FR1	+0.18/-0.13	+0.18/-0.13	+0.18/-0.13	XXX	+/-0.12
CEM1	+0.18/-0.13	+0.18/-0.13	+0.18/-0.13	XXXX	+/-0.08