


TPIC2601 6-CHANNEL COMMON-SOURCE POWER DMOS ARRAY

SLIS048A – NOVEMBER 1996 – REVISED JANUARY 1998

- Low $r_{DS(on)}$. . . 0.25 Ω Typ
- High Output Voltage . . . 60 V
- Pulsed Current . . . 10 A Per Channel
- Avalanche Energy Capability . . . 105 mJ
- Input Transient Protection . . . 2000 V

KTC or KTD[†] PACKAGE
(TOP VIEW)

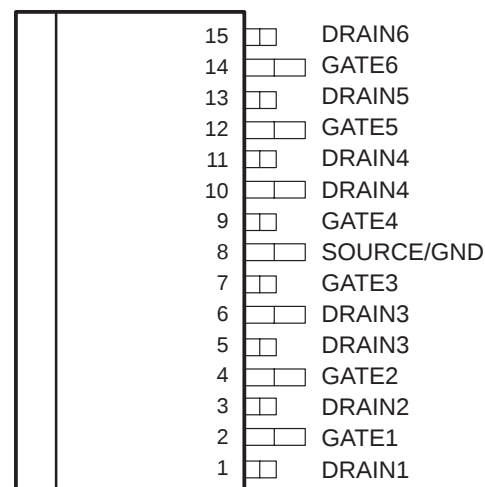


[†] TI Japan only

description

The TPIC2601 is a monolithic power DMOS array that consists of six electrically isolated N-channel enhancement-mode DMOS transistors configured with a common source and open drains. Each transistor features integrated high-current zener diodes to prevent gate damage in the event that an overstress condition occurs. These zener diodes also provide up to 2000 V of ESD protection when tested using the human-body model.

The TPIC2601 is offered in a 15-pin PowerFLEX[™] (KTC) package and is characterized for operation over the case temperature range of -40°C to 125°C . A 15-pin PowerFLEX[™] (KTD) package is also available for TI Japan only.

schematic

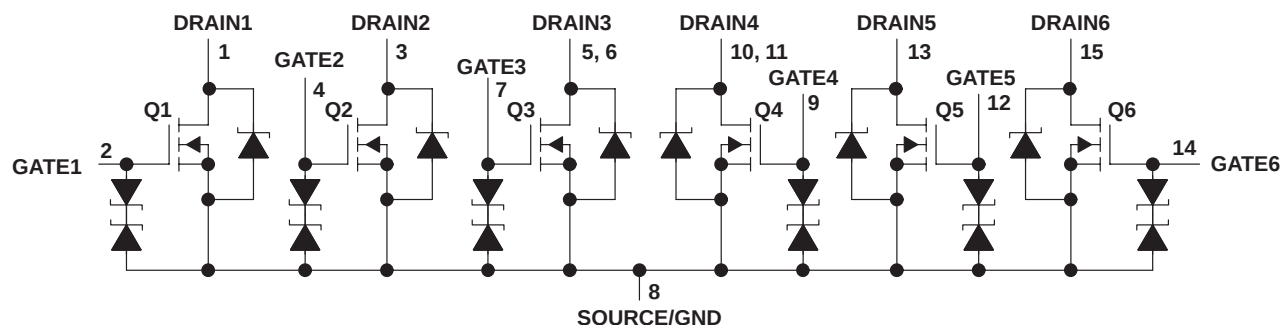

NOTE A: For correct operation, no drain terminal may be taken below GND.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerFLEX is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998, Texas Instruments Incorporated

TPIC2601

6-CHANNEL COMMON-SOURCE POWER DMOS ARRAY

SLIS048A – NOVEMBER 1996 – REVISED JANUARY 1998

absolute maximum ratings over operating case temperature range (unless otherwise noted)[†]

Drain-to-source voltage, V_{DS}	60 V
Gate-to-source voltage, V_{GS}	–9 V to 18 V
Continuous drain current, each output, all outputs on, $T_C = 25^\circ\text{C}$	2 A
Pulsed drain current, each output, I_{Dmax} , $T_C = 25^\circ\text{C}$ (see Note 1 and Figure 7)	10 A
Continuous gate-to-source zener diode current, $T_C = 25^\circ\text{C}$	± 25 mA
Pulsed gate-to-source zener diode current, $T_C = 25^\circ\text{C}$	± 250 mA
Single-pulse avalanche energy, E_{AS} , $T_C = 25^\circ\text{C}$ (see Figures 4 and 16)	105 mJ
Continuous total power dissipation at (or below) $T_A = 25^\circ\text{C}$	1.7 W
Power dissipation at (or below) $T_C = 75^\circ\text{C}$, all outputs on	18.75 W
Operating virtual junction temperature range, T_J	–40°C to 150°C
Operating case temperature range, T_C	–40°C to 125°C
Storage temperature range, T_{stg}	–40°C to 125°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Pulse duration = 10 ms, duty cycle = 2%

electrical characteristics, $T_C = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
$V_{(BR)DSX}$	Drain-to-source breakdown voltage	$I_D = 250\ \mu\text{A}$, $V_{GS} = 0$		60			V
$V_{GS(th)}$	Gate-to-source threshold voltage	$I_D = 1\ \text{mA}$, $V_{DS} = V_{GS}$		1.5	2.05	2.2	V
$V_{GS(th)match}$	Gate-to-source threshold voltage matching	See Figure 5			5	40	mV
$V_{(BR)GS}$	Gate-to-source breakdown voltage	$I_{GS} = 250\ \mu\text{A}$		18			V
$V_{(BR)SG}$	Source-to-gate breakdown voltage	$I_{SG} = 250\ \mu\text{A}$		9			V
$V_{DS(on)}$	Drain-to-source on-state voltage	$I_D = 2\ \text{A}$, See Notes 2 and 3 $V_{GS} = 10\ \text{V}$			0.5	0.6	V
$V_{F(SD)}$	Forward on-state voltage, source-to-drain	$I_S = 2\ \text{A}$, See Notes 2 and 3 and Figure 12 $V_{GS} = 0$			0.85	1	V
I_{DSS}	Zero-gate-voltage drain current	$V_{DS} = 48\ \text{V}$, $V_{GS} = 0$	$T_C = 25^\circ\text{C}$		0.05	1	μA
			$T_C = 125^\circ\text{C}$		0.5	10	
I_{GSSF}	Forward gate current, drain short circuited to source	$V_{GS} = 10\ \text{V}$, $V_{DS} = 0$			20	200	nA
I_{GSSR}	Reverse gate current, drain short circuited to source	$V_{SG} = 5\ \text{V}$, $V_{DS} = 0$			10	100	nA
$r_{DS(on)}$	Static drain-to-source on-state resistance	$V_{GS} = 10\ \text{V}$, $I_D = 2\ \text{A}$, See Notes 2 and 3 and Figures 6 and 7	$T_C = 25^\circ\text{C}$		0.25	0.3	Ω
			$T_C = 125^\circ\text{C}$		0.4	0.5	
g_{fs}	Forward transconductance	$V_{DS} = 15\ \text{V}$, See Notes 2 and 3 and Figure 9 $I_D = 1\ \text{A}$			1.3	1.95	S
C_{iss}	Short-circuit input capacitance, common source	$V_{DS} = 25\ \text{V}$, $f = 1\ \text{MHz}$, $V_{GS} = 0$, See Figure 11			180	225	pF
C_{oss}	Short-circuit output capacitance, common source				110	138	
C_{rss}	Short-circuit reverse transfer capacitance, common source				80	100	

NOTES: 2. Technique should limit $T_J - T_C$ to 10°C maximum.

3. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TPIC2601

6-CHANNEL COMMON-SOURCE POWER DMOS ARRAY

SLIS048A – NOVEMBER 1996 – REVISED JANUARY 1998

source-to-drain diode characteristics, $T_C = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{rr}(\text{SD})$ Reverse-recovery time	$I_S = 1\text{ A}$, $V_{DS} = 48\text{ V}$, $V_{GS} = 0$, $di/dt = 100\text{ A}/\mu\text{s}$, See Figures 1 and 14		72		ns
Q_{RR} Total diode charge			180		nC

resistive-load switching characteristics, $T_C = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{d(\text{on})}$ Delay time, $V_{GS}\uparrow$ to $V_{DS}\downarrow$ turn on	$V_{DD} = 25\text{ V}$, $R_L = 25\ \Omega$, $t_{en} = 10\text{ ns}$, $t_{dis} = 10\text{ ns}$, See Figure 2		194		ns
$t_{d(\text{off})}$ Delay time, $V_{GS}\downarrow$ to $V_{DS}\uparrow$ turn off			430		
t_r Rise time, V_{DS}			90		
t_f Fall time, V_{DS}			180		
Q_g Total gate charge	$V_{DD} = 48\text{ V}$, $I_D = 1\text{ A}$, $V_{GS} = 10\text{ V}$, See Figure 3		5.1	6.4	nC
$Q_{gs(\text{th})}$ Threshold gate-to-source charge			0.5	0.63	
Q_{gd} Gate-to-drain charge			2.75	3.4	
L_D Internal drain inductance			5		nH
L_S Internal source inductance			5		
R_g Internal gate resistance			500		Ω

thermal resistance

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$R_{\theta JA}$ Junction-to-ambient thermal resistance	All outputs with equal power			72	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$ Junction-to-case thermal resistance	All outputs with equal power			4	
	One output dissipating power			7	

TPIC2601
6-CHANNEL COMMON-SOURCE POWER DMOS ARRAY

SLIS048A – NOVEMBER 1996 – REVISED JANUARY 1998

PARAMETER MEASUREMENT INFORMATION


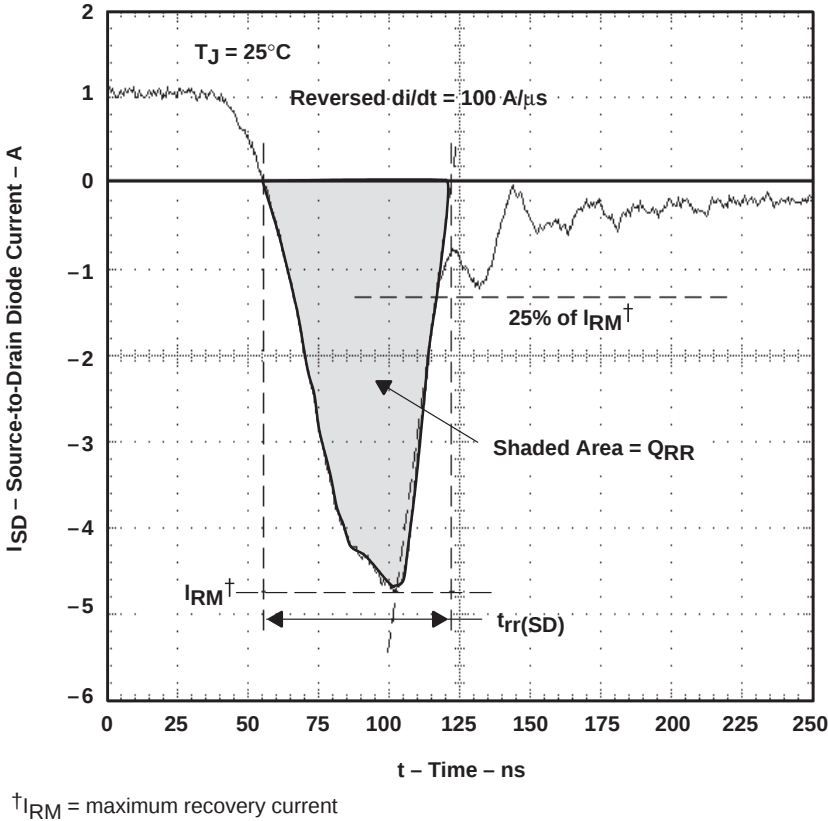


Figure 1. Reverse-Recovery Current Waveform of Source-to-Drain Diode

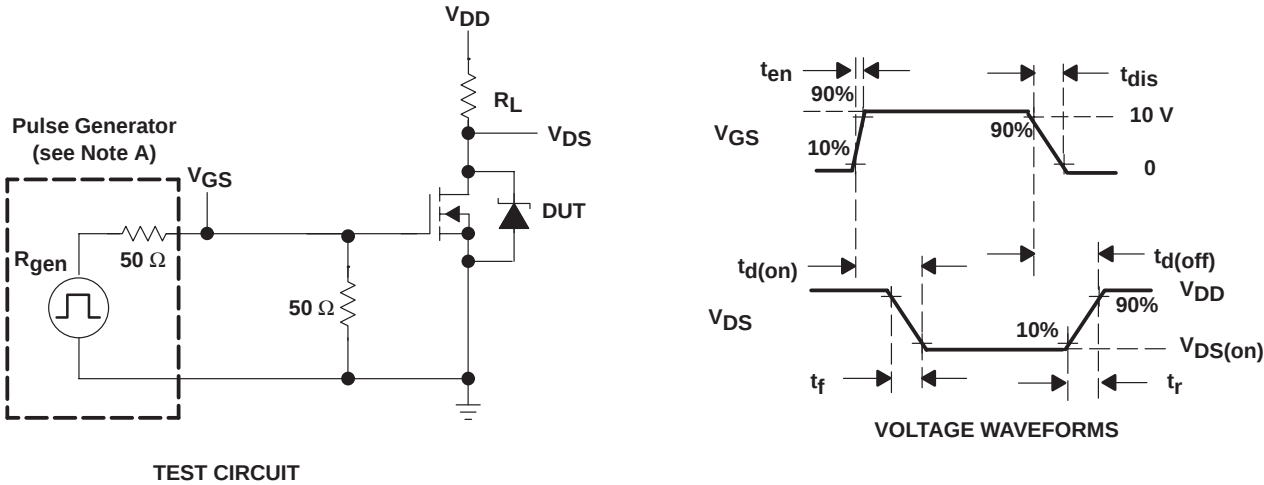

NOTE A: The pulse generator has the following characteristics: $t_{\text{en}} \leq 10 \text{ ns}$, $t_{\text{dis}} \leq 10 \text{ ns}$, $Z_0 = 50 \Omega$.

Figure 2. Resistive Switching

PARAMETER MEASUREMENT INFORMATION


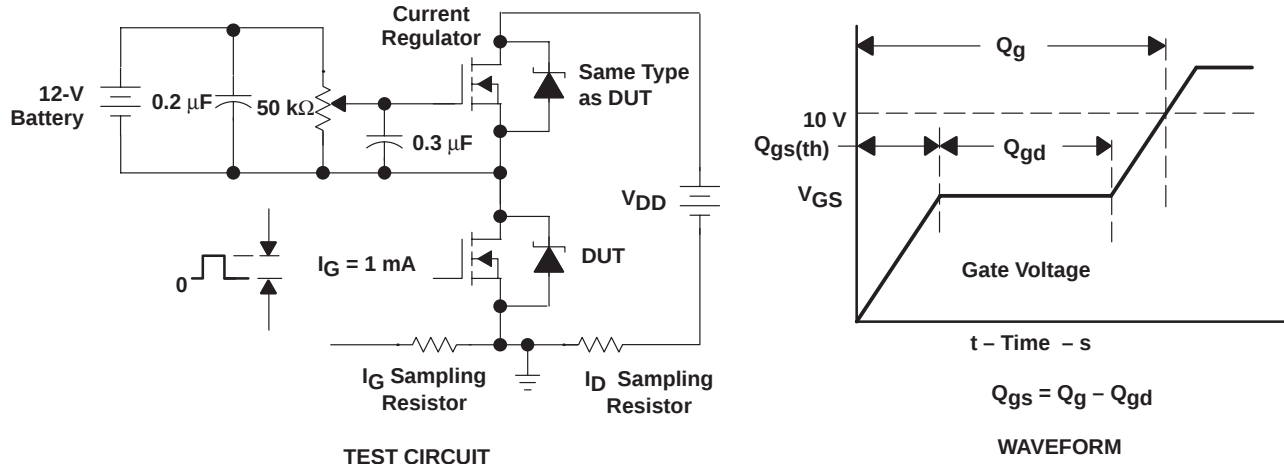


Figure 3. Gate Charge Test Circuit and Waveform

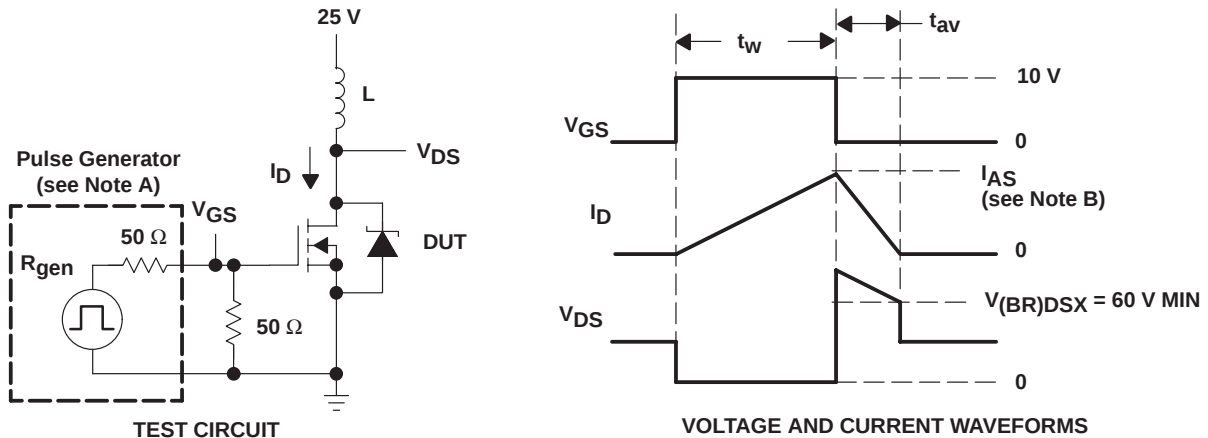

NOTES: A. The pulse generator has the following characteristics: $t_r \leq 10 \text{ ns}$, $t_f \leq 10 \text{ ns}$, $Z_O = 50 \Omega$.

B. Input pulse duration (t_w) is increased until peak current $I_{AS} = 2 \text{ A}$.

$$\text{Energy test level is defined as } E_{AS} = \frac{I_{AS} \times V_{(BR)DSX} \times t_{av}}{2} = 105 \text{ mJ minimum where } t_{av} = \text{avalanche time.}$$

Figure 4. Single-Pulse Avalanche-Energy Test Circuit and Waveforms

TPIC2601

6-CHANNEL COMMON-SOURCE POWER DMOS ARRAY

SLIS048A – NOVEMBER 1996 – REVISED JANUARY 1998

TYPICAL CHARACTERISTICS

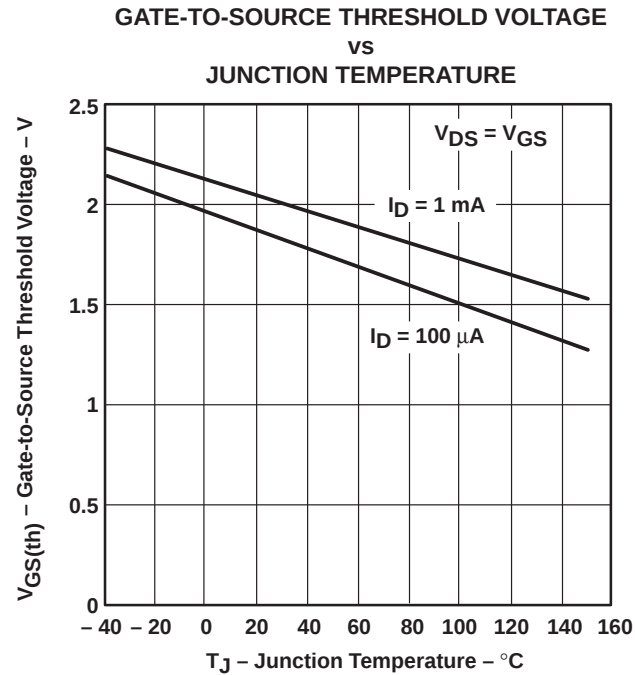


Figure 5

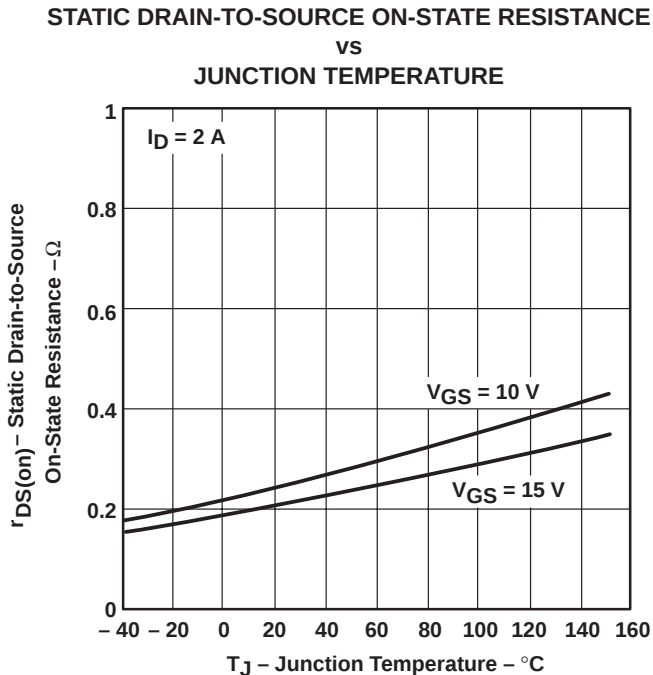


Figure 6

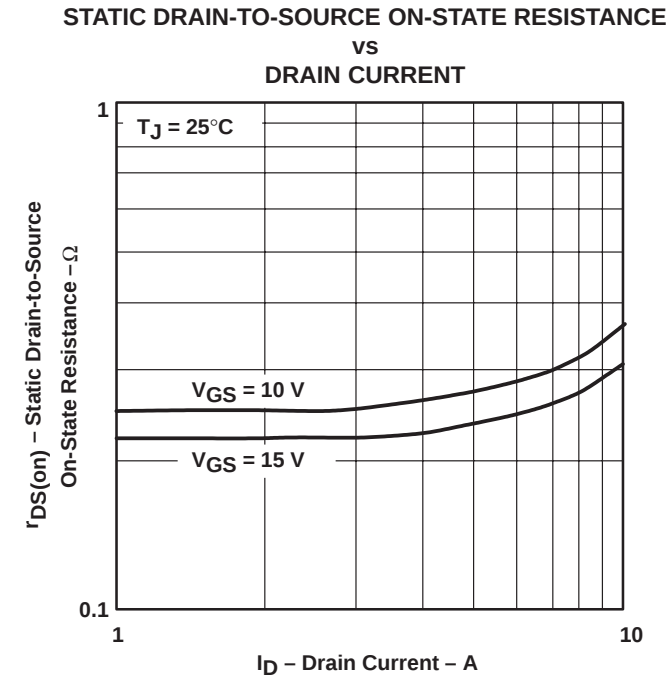


Figure 7

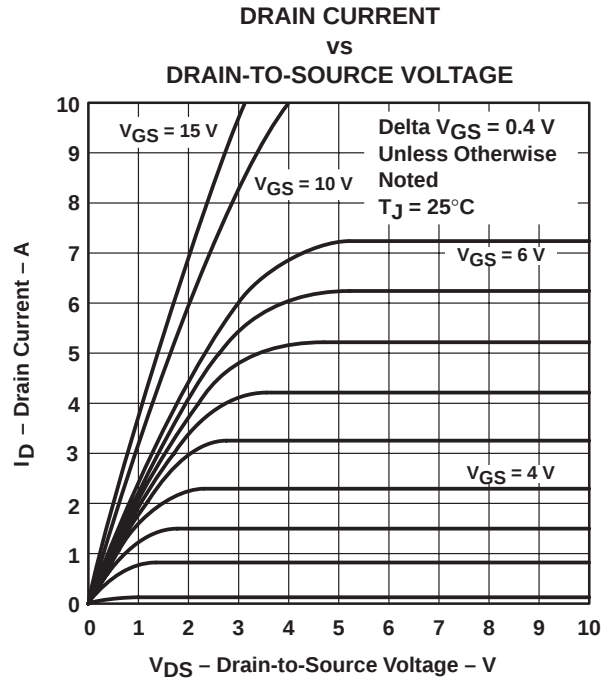


Figure 8

TYPICAL CHARACTERISTICS

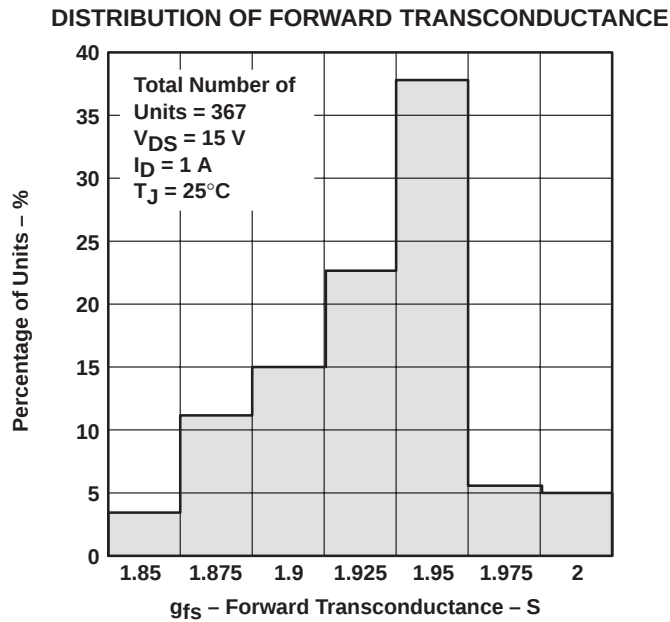


Figure 9

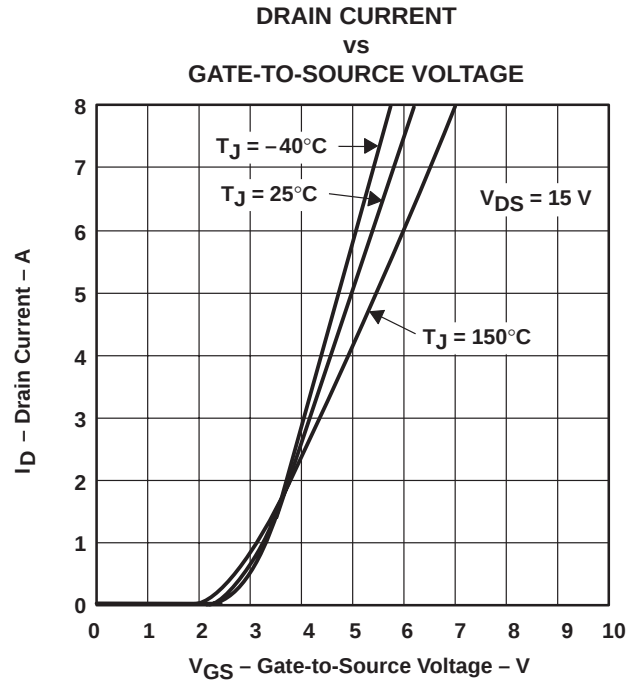


Figure 10

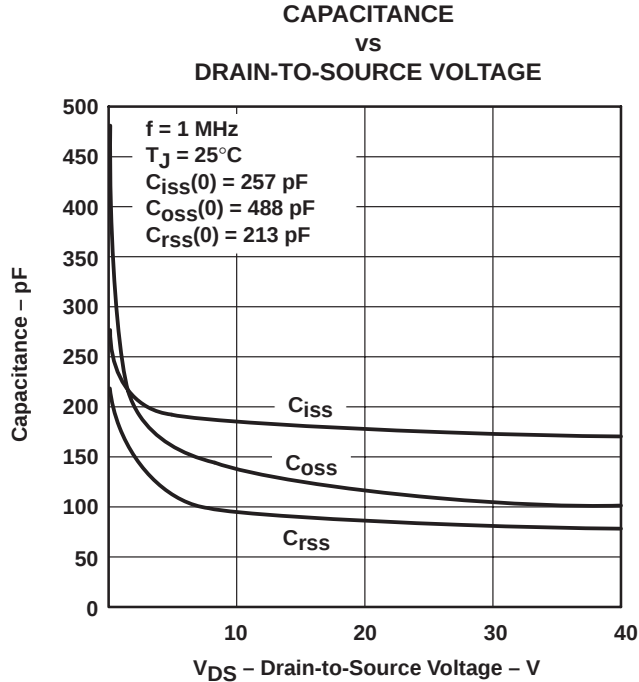


Figure 11

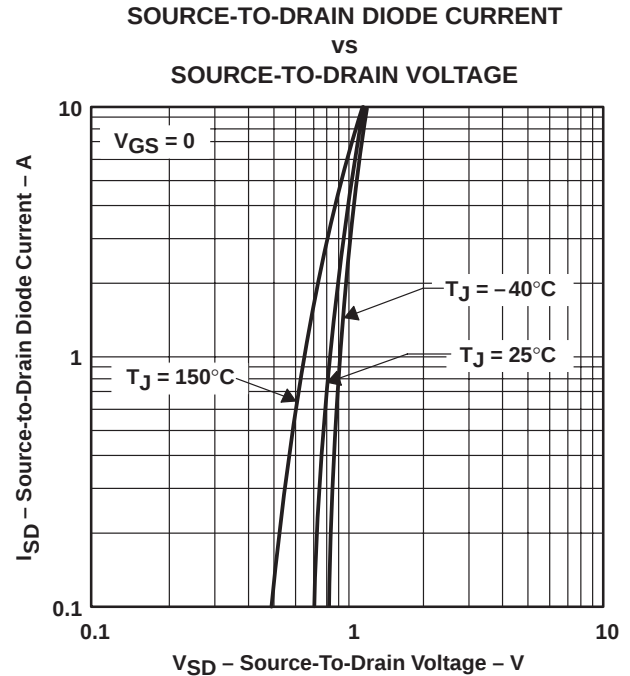


Figure 12

TPIC2601

6-CHANNEL COMMON-SOURCE POWER DMOS ARRAY

SLIS048A – NOVEMBER 1996 – REVISED JANUARY 1998

TYPICAL CHARACTERISTICS

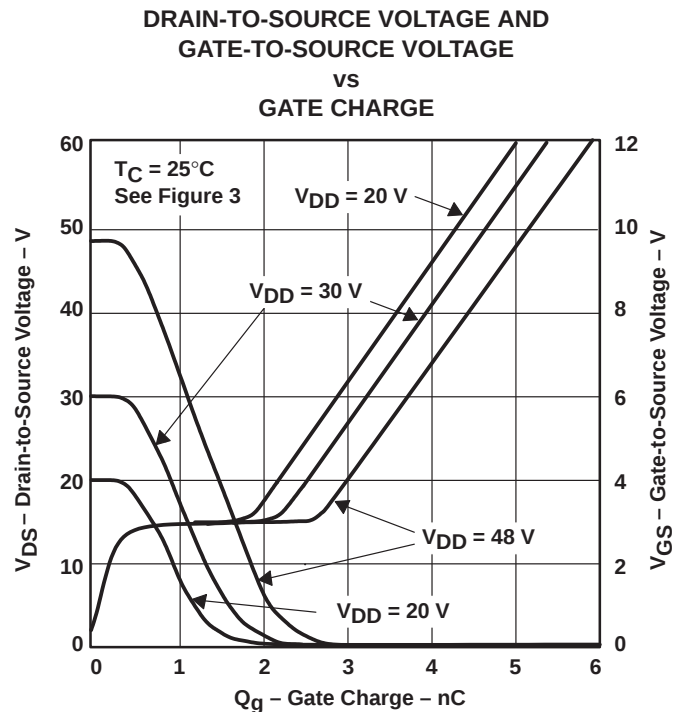


Figure 13

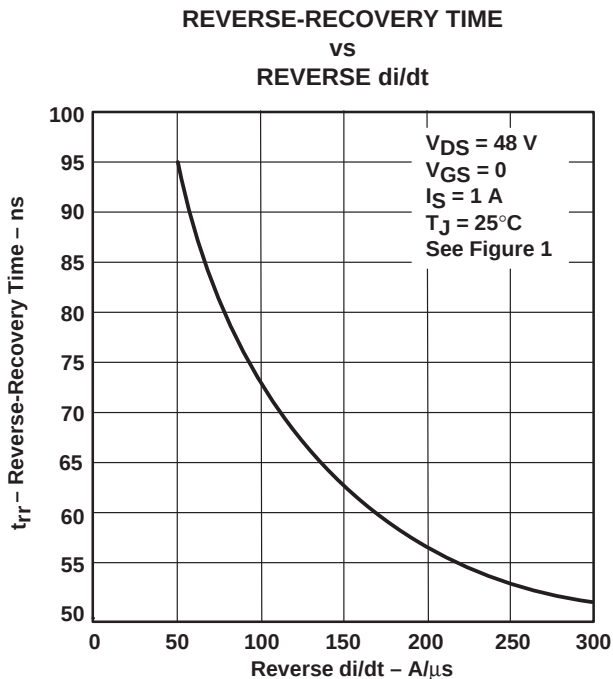


Figure 14

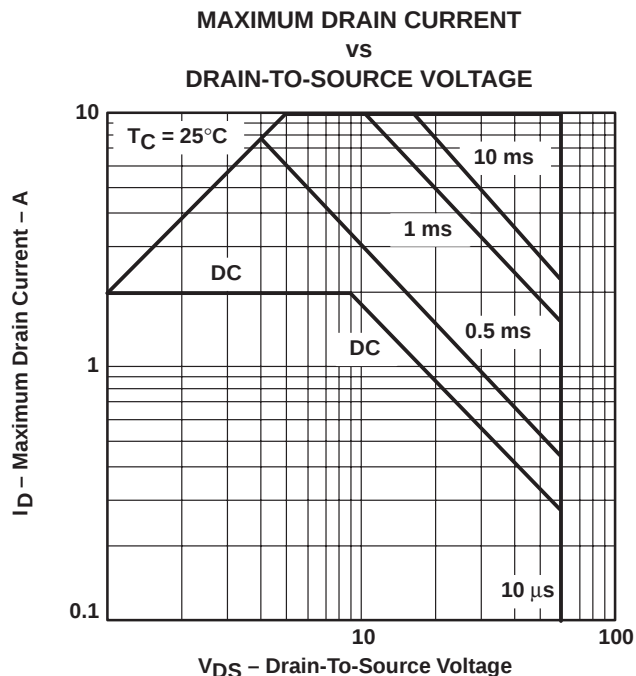


Figure 15


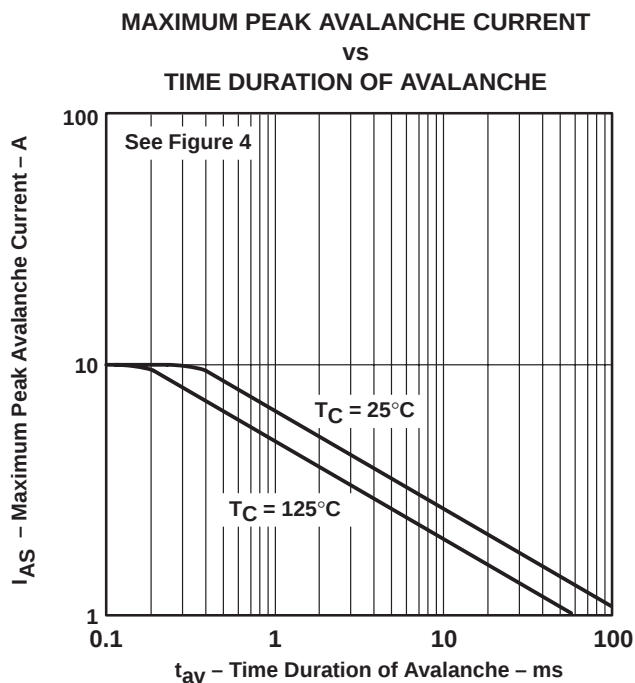


Figure 16

THERMAL INFORMATION

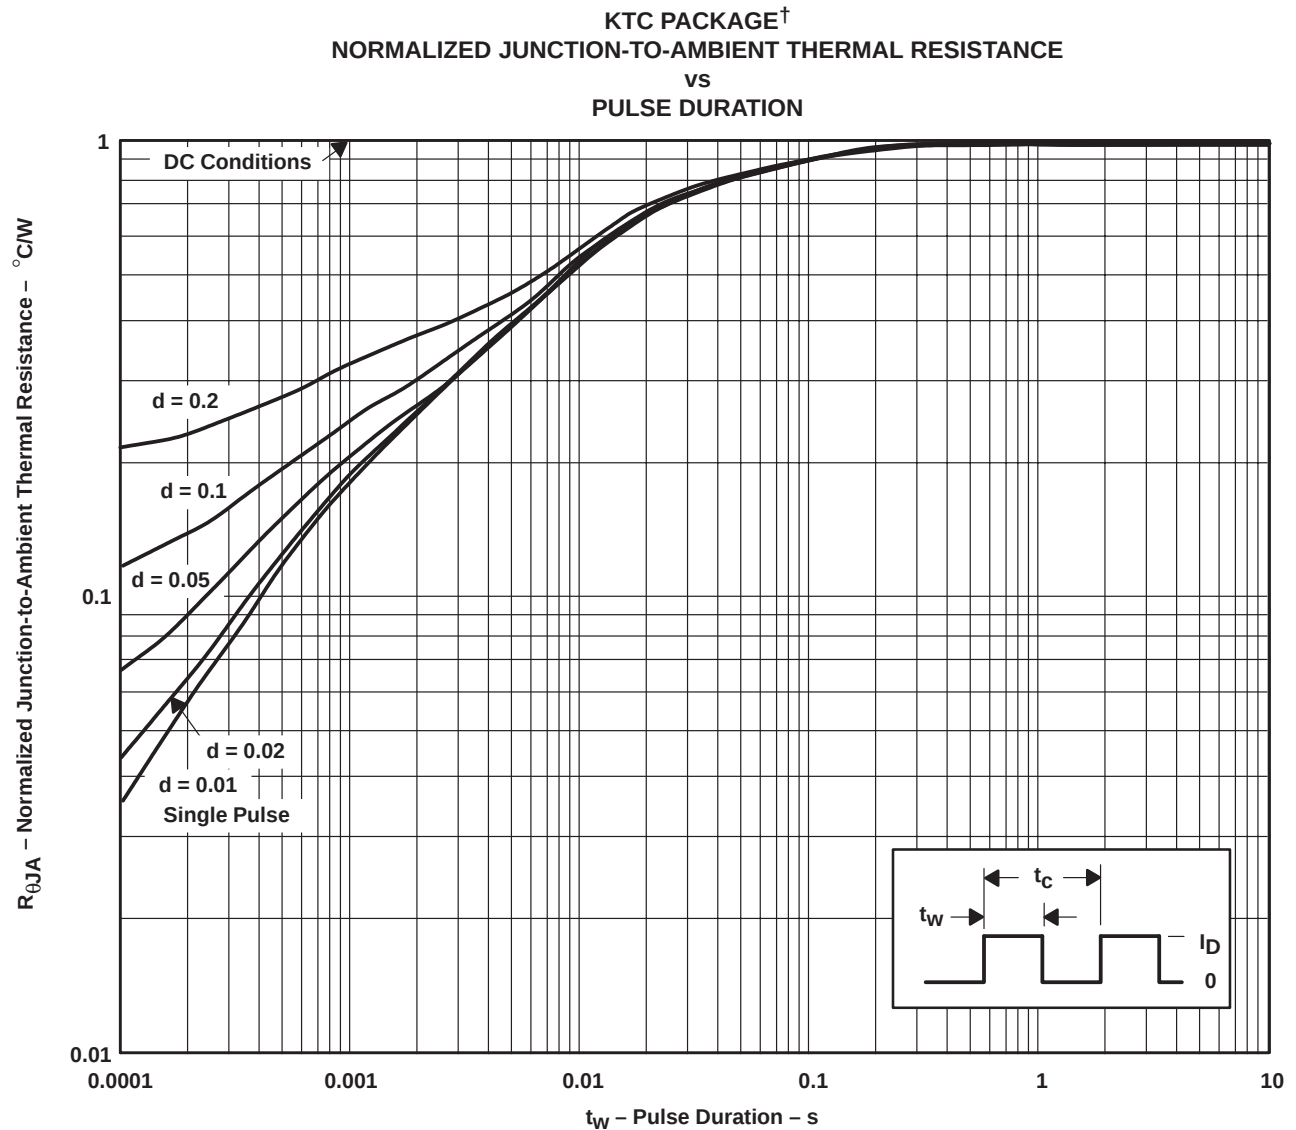

[†] Device mounted on 24 in², 4-layer FR4 printed-circuit board with no heatsink.

NOTE A: $Z_{\theta A}(t) = r(t) R_{\theta JA}$
 t_W = pulse duration
 t_C = cycle time
 d = duty cycle = t_W/t_C

Figure 17

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.