




INTEGRATED BAR GRAPH DISPLAYS

TSM3914/15/16 SERIES

T-41-37

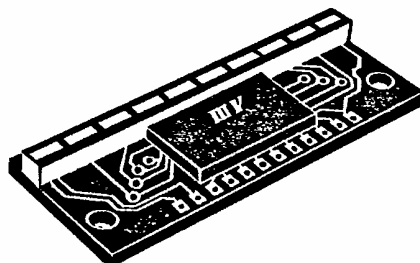

PRODUCT MATRIX

| Part Number | Function | Segment Color Designation |
|-------------|-------------|---------------------------|
| TSM3914 | Linear | 10 Standard Red |
| TSM39142 | Linear | 10 Green |
| TSM39143 | Linear | 10 Yellow |
| TSM39146 | Linear | 6 Green, 4 Red |
| TSM39147 | Linear | 6 Green, 2 Red |
| TSM39148 | Linear | 6 Green, 2 Yellow, 2 Red |
| TSM3915 | Logarithmic | 10 Standard Red |
| TSM39151 | Logarithmic | 10 High Efficiency Red |
| TSM39152 | Logarithmic | 10 Green |
| TSM39153 | Logarithmic | 10 Yellow |
| TSM39156 | Logarithmic | 6 Green, 2 Yellow, 2 Red |
| TSM3916 | VU | 10 Standard Red |
| TSM39162 | VU | 10 Green |
| TSM39163 | VU | 10 Yellow |
| TSM39166 | VU | 6 Green, 2 Yellow, 2 Red |
| TSM39169 | VU | 7 Green, 3 Red |

ABSOLUTE MAXIMUM RATINGS

Power Dissipation-Driver (Note 1): 500mW
 V⁺ Voltage: 24V
 VLED Voltage: 24V
 Input Signal Overvoltage (Note 2): $\pm 35V$
 Voltage on Resistor String: -100mV to V⁺
 Reference Load Current: 10mA
 Signal Input Current
 (With Overvoltage Applied): $\pm 3.0mA$
 Operating Temperature Range: 0°C to +70°C
 Storage Temperature Range: -20°C to +70°C
 Lead Temperature Range
 (Soldering, 5 Seconds): 230°C

FEATURES

- Packages are End-Stackable up to 10 Cascaded Arrays (100 Bar Graph Elements)
- Linear, Logarithmic, and VU Meter Functions
- Bar or Dot Display Mode Externally Selectable
- LED Current Programmable from 2.0mA to 30mA
- Stable, Internal Voltage Reference for Full-Scale Analog Inputs from 1.2V to 12V
- Inputs Operate Down to Ground
- Signal Input Withstands 35V Without Damage or False Outputs
- Variety of Green/Yellow/Red Bar Sequences Available

APPLICATIONS

- Power Meter in Stereo Systems
- S Meter in Ham and CB Radios
- VU Meter in Tape Recorders
- Process Control Meters
- Replacement for Edge Meters

DESCRIPTION

The TSM3914/15/16 series are functional replacements for a variety of conventional meters. Each combines a 10-element LED array and a monolithic integrated circuit display driver. Successive LEDs light as the analog input voltage level increases past prescaled threshold points.

The TSM3914 provides a linear analog display, with internal threshold points linearly scaled. A logarithmic display is provided by the TSM3915 with threshold points set on 3dB intervals. The TSM3916 is a variation of the logarithmic display; the VU meter function is provided by using threshold points at common VU intervals.

The driver circuit contains an adjustable voltage reference which precisely sets LED thresholds. Current drives to the LEDs are regulated and programmable, eliminating the need for resistors. The entire display can operate from supply voltages as low as 3V and as high as 24V. The internal voltage reference is also connected to an accurate 10-step voltage divider, supplying reference voltages for 10 individual comparators. These comparators switch as the signal voltage exceeds the established thresholds as described above. The typical overall inaccuracy (deviation from ideal) is typically within 1% for the TSM3914 and below 1dB for the TSM3915 and TSM3916. A high impedance input buffer accepts signals down to ground, yet protects against signal inputs of 35V above or below ground. A single (mode) pin changes the display from a bar graph to a moving dot.



THREE-FIVE SYSTEMS, INC.
 Optoelectronics Group
 TEL: 602-496-0035; FAX: 602-496-0168

THREE-FIVE SYSTEMS, LTD.
 Swindon, U.K.

TEL: (0793) 618835; FAX: (0793) 614127

INTEGRATED BAR GRAPH DISPLAYS

TSM3914/15/16 SERIES

F-19-36
T-41-37

OPTOELECTRICAL CHARACTERISTICS

| Symbol | Parameter | Conditions TA = 25°C | Min | Typ | Max | Units |
|------------------|--|--|--------------|------|------------|----------|
| V _{REF} | Voltage Reference Output | 0.10mA ≤ I _{LREF} ≤ 4.0mA, V* = 12.0V, V _{LED} = 4.5V | 1.2 | 1.28 | 1.34 | V |
| I _I | Signal Input Bias Current | 0V ≤ V _{IN} ≤ V* - 1.5V | | 25 | 100 | nA |
| I _S | Supply Current (V* Lead) | V* = 5.0V to 20V, I _{LREF} = 1.0mA | | 6.0 | 10 | mA |
| | Absolute Accuracy at each Threshold Point | TSM3914 Deviation from Straight Line through First and Last Threshold Point (Note 5) | -5.0 | | 5.0 | % |
| | | TSM3915 V _{IN} = -3.0 to 18dB (Note 6) V _{IN} = -21 to -27dB (Note 6) | -1.0 -2.0 | | 1.5 2.0 | dB dB |
| | | TSM3916 V _{IN} = +3.0 to -7.0dB (Note 7) V _{IN} = -10 to -20dB (Note 7) | -1.0 -2.0 | | 1.5 2.0 | dB dB |
| I _L | LED Segment Intensity Red High Efficiency Red Green Yellow | V* = 12.0V, V _{LED} = 4.5V, I _{LREF} = 1.0mA | 0.10 | 0.20 | | mcd |
| | | | 0.50 | 0.80 | | mcd |
| | | | 0.60 | 1.50 | | mcd |
| | | | 0.60 | 1.50 | | mcd |
| | LED Intensity Matching (All Segments On) | V _{IN} ≥ 10V, V* = 12V, V _{LED} = 3.0V, I _{LREF} = 1.0mA | | ±33 | | % |
| I _{LED} | LED Current/Segment | V* = 12V, V _{LED} = 4.5V, I _{LREF} = 1.0mA | | 10 | | mA |
| λP | Peak Wavelength Red High Efficiency Red Green Yellow | | | 655 | | nm |
| | | | | 635 | | nm |
| | | | | 565 | | nm |
| | | | | 585 | | nm |

Note 1: Driver dissipation is given by: P_{DR} = (V_{LED} - 1.7V) I_{LED} (Total) + (V_{IN} - 10mA) where V_{LED} is the LED supply voltage. 1.7V is the nominal individual LED voltage drop and 10mA is the maximum current of the V* supply.

Note 2: The addition of a 39k resistor in series with the input signal allows ±100V signals without damage.

Note 3: Unless otherwise stated, all specifications apply with the following conditions: V* (supply) 3.0V to 20V; input signal range 0.015V to (V* - 1.5V) with a maximum of 12V_{DC}; Comparator divider voltages, same limits; T_A = 25°C; Reference load current, 80μA minimum.

Note 4: The following situations can lead to incorrect operation (a) V_{LED} exceeding V* or more than 14V below V*; (b) signal and comparator divider voltage becoming higher than the limits of Note 1; (c) reference load capacitance above 0.05μF; (d) reference current loading above 5.0mA.

Note 5: Divider non-linearity is measured with R_{LO} at 0.000V and R_{HI} at 10,000 V_{DC}. (At lower divider voltages, buffer and comparator offset voltages may add significant error.)


Note 6: Accuracy is measured referred to 0dB = 10,000 V_{DC} at signal input, with R_{LO} at 0.000V and R_{HI} at 10,000 V_{DC}. (At lower full-scale voltages, buffer and comparator offset voltages may add significant error.)

Note 7: Accuracy is measured referred to 3dB = 10,000 V_{DC} at signal input, with R_{LO} at 0.000V and R_{HI} at 10,000 V_{DC}. (At lower full-scale voltages, buffer and comparator offset voltages may add significant error.)

PHYSICAL DIMENSIONS

| PIN | ELECTRICAL CONNECTION |
|-----|-----------------------|
| 1 | V _{LED} |
| 2 | LED 1 |
| 3 | GROUND |
| 4 | V* |
| 5 | R _{LO} |
| 6 | SIGNAL IN |
| 7 | R _{HI} |
| 8 | REFERENCE OUT |
| 9 | REFERENCE ADJUST |
| 10 | MODE |
| 11 | LED 9 |
| 12 | LED 10 |

DIMENSIONS:
INCHES
(Millimeters)

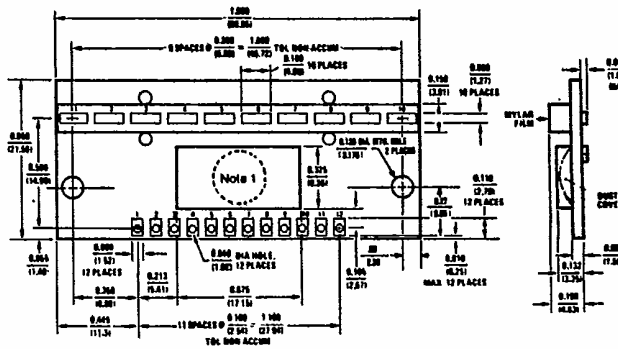

Note 1: Standard package is provided with a rectangular dust cover or Epoxy blob.

WEIGHT: 0.12 Ounce
3.40 Grams

TOLERANCES: 0.XXX ± 0.015
(X XX ± 0.38)



THREE-FIVE SYSTEMS, INC.

Optoelectronics Group

TEL: 602-496-0035; FAX: 602-496-0168

THREE-FIVE SYSTEMS, LTD.

Swindon, U.K.


TEL: (0793) 616835; FAX: (0793) 614127

INTEGRATED BAR GRAPH DISPLAYS

TSM3914/15/16 SERIES

F-19-36
T-41-37

BLOCK DIAGRAM

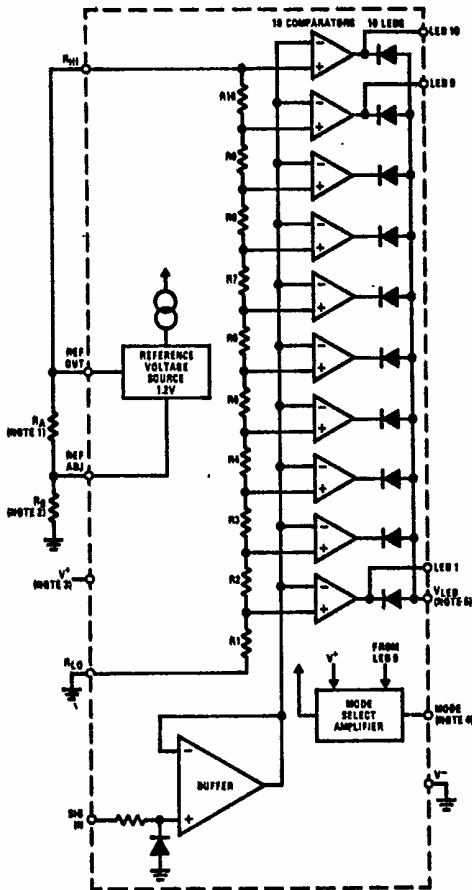

TYPICAL RESISTOR STRING VALUES

| RESISTOR | TSM3914 | TSM3915 | TSM3916 |
|----------|---------|---------|---------|
| R1 | 1.00k | 1.00k | 0.708k |
| R2 | 1.00k | 0.41k | 1.531k |
| R3 | 1.00k | 0.59k | 0.923k |
| R4 | 1.00k | 0.83k | 0.819k |
| R5 | 1.00k | 1.17k | 1.031k |
| R6 | 1.00k | 1.66k | 1.298k |
| R7 | 1.00k | 2.34k | 0.769k |
| R8 | 1.00k | 3.31k | 0.864k |
| R9 | 1.00k | 4.69k | 0.970k |
| R10 | 1.00k | 6.63k | 1.087k |
| Total | 10k | 22.6k | 10k |

Note 1: R_A determines I_{LED} and thus LED brightness:

$$I_{LED} \approx 10 \left(\frac{1.25V}{R_A} + \frac{V_{FS}}{R_{DIVIDER}} \right)$$

Note 2: R_B determines full-scale voltage.

$$V_{FS} \approx 1.25V \left(1 + \frac{R_B}{R_A} \right) + I_{REF} R_B, \text{ where } I_{REF} \text{ is nominally } 80\mu A.$$

Note 3: V^* may be 3.0V to 20V, additionally, for proper operation $V^* \geq V_{LED}, \geq V_{SIG} + 1.5V, \geq V_{REF} + 1.5V$.

Note 4: Mode controls type of display. Connect to LED 9 for dot display and to V^* for bar display.

Note 5: V_{LED} may be 3.0V to 20V (see Note 3). V_{LED} may be limited by the driver circuit dissipation rating.

Note 6: Driver dissipation is given by $P_{DR} = (V_{LED} - 1.7V) I_{LED} (Total) + (V^*) 10mA$ where V_{LED} is the LED supply voltage, 1.7V is the nominal individual LED voltage drop and 10mA is the maximum current of the V^* supply.



THREE-FIVE SYSTEMS, INC.

Optoelectronics Group

TEL: 602-496-0035; FAX: 602-496-0168

THREE-FIVE SYSTEMS, LTD.


Swindon, U.K.

TEL: (0793) 618835; FAX: (0793) 614127


INTEGRATED BAR GRAPH DISPLAYS **TSM3914/15/16 SERIES**

T-17-24
T-41-37


TYPICAL APPLICATIONS

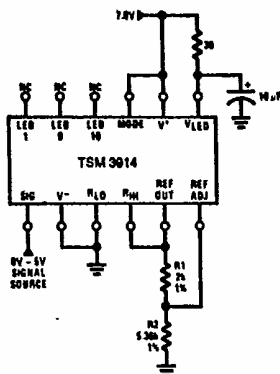


Linear Bar Graph (5V Full-Scale)

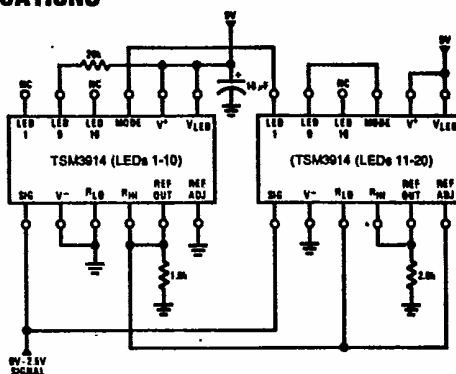

20-Segment Linear Dot Graph (2.5V Full-Scale)

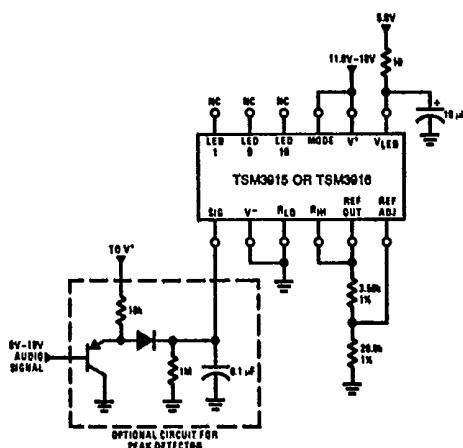

Logarithmic (TSM3915) or VU (TSM3916) Audio Bar Graph

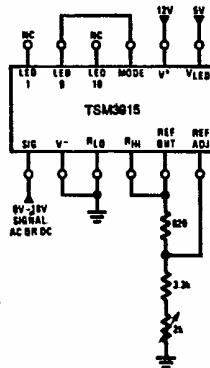

Logarithmic Audio Dot Graph (10V Full-Scale)

RECOMMENDED DISPLAY PROCESSING

The TSM3914/15/16 is constructed on a standard printed circuit board substrate and covered with a plastic reflector. The edge connector tab will withstand 230°C for 5 seconds. Permanent damage to the display will result if reflector temperature exceeds 70°C. Since the display is not hermetic, immersion of the entire package during flux and clean operation may cause condensation of flux or cleaner on the underside of the reflector. Only the edge

connectors should be immersed.

Rosin core solder, solid core solder, and low activity organic fluxes are recommended. Freon TF, Isopropanol, Methanol or Ethanol solvents are recommended only at room temperature and for short periods. The use of other solvents or elevated temperature use of the recommended solvents may cause permanent damage to the reflector or display.



THREE-FIVE SYSTEMS, INC.

Optoelectronics Group

TEL: 602-496-0035; FAX: 602-496-0168

THREE-FIVE SYSTEMS, LTD.

Swindon, U.K.

TEL: (0783) 618635; FAX: (0783) 614127