


### PHASE NOISE (1 Hz BW, typical)

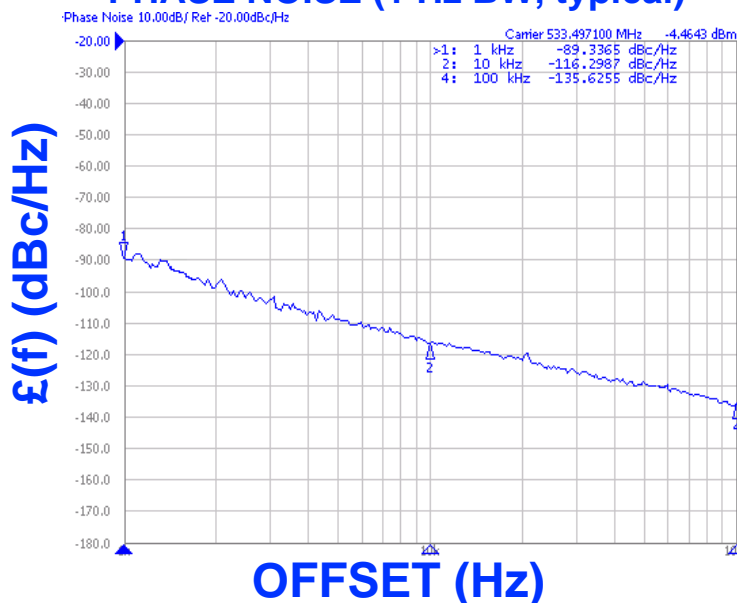

#### FEATURES

- Frequency Range: 526 - 541 MHz
- Tuning Voltage: 0.5-4.5 Vdc
- MINI-16M- - Style Package

#### APPLICATIONS

- Mobitex Radios
- RF Modems
- Satellite Communications

#### PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	526 - 541	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-115	dBc/Hz
Harmonic Suppression (2nd, typ.)	-10	dBc
Tuning Voltage	0.5-4.5	Vdc
Tuning Sensitivity (avg.)	11	MHz/V
Power Output	0±4	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<0.4	MHz/V
Pulling ( 14dB Return Loss, Any Phase)	<0.4	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16M-LOW	

#### POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	9	mA


All specifications are typical unless otherwise noted and subject to change without notice.

#### APPLICATION NOTES


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

#### NOTES:

TUNING CURVE, typ.

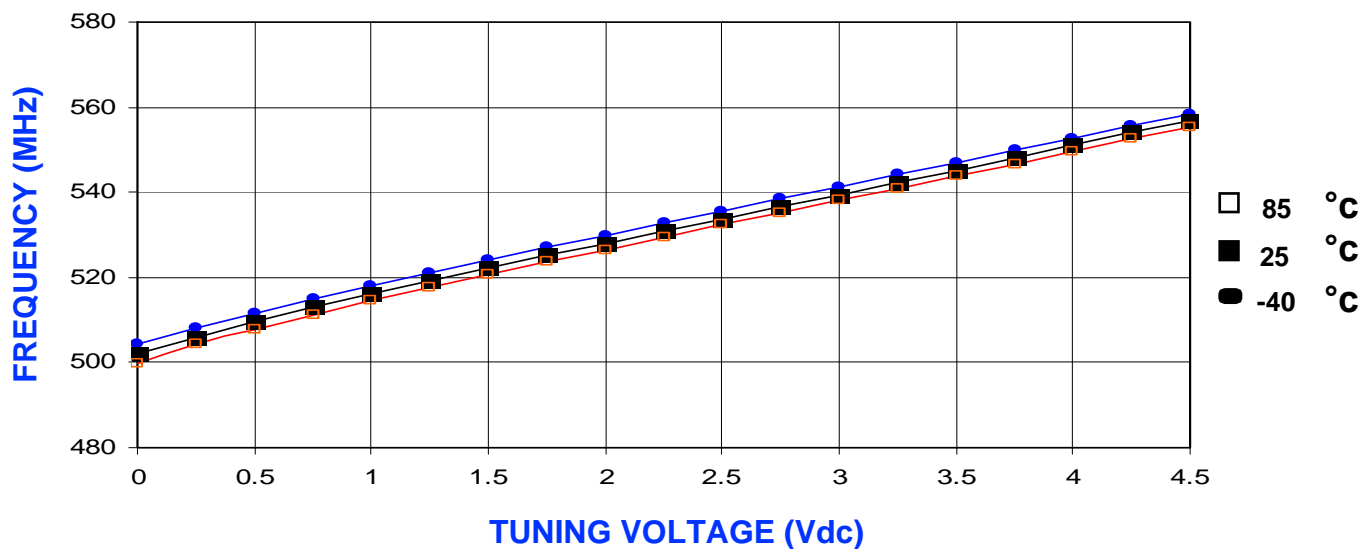

POWER CURVE, typ.

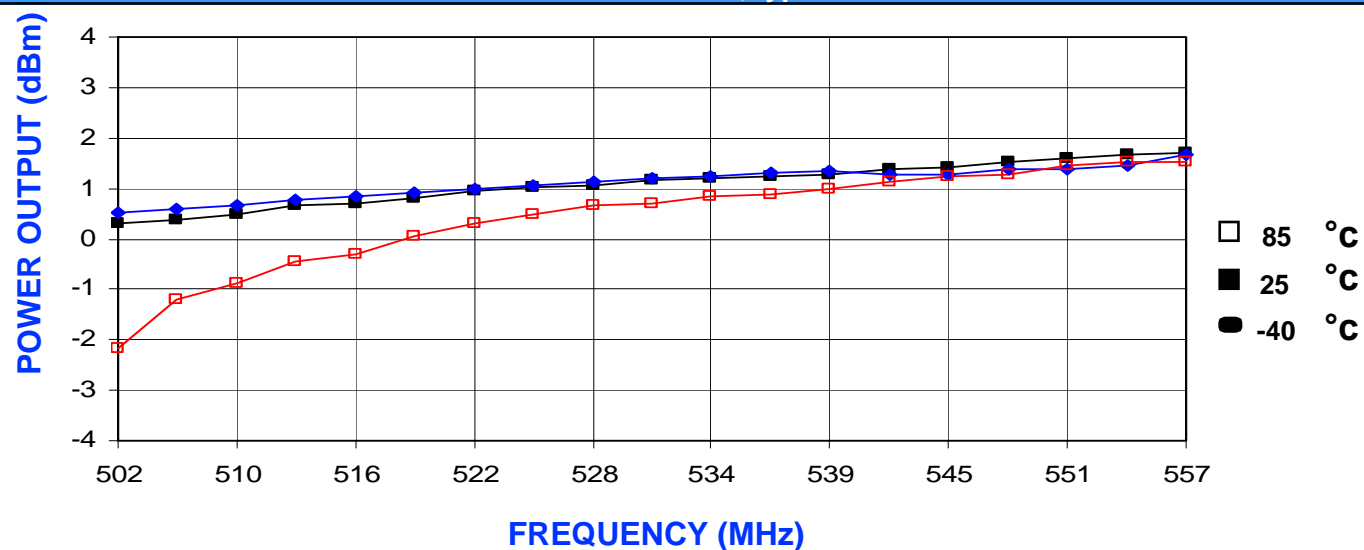

PHYSICAL DIMENSIONS

