

17.0-27.0 GHz GaAs MMIC Transmitter

May 2005 - Rev 13-May-05


Features

- X Fundamental Transmitter
- X Low DC Power Consumption
- X Optional Power Bias Configuration
- X 0.0 dB Conversion Gain
- X +12.0 dBm Third Order Intercept (IIP3)
- X 100% On-Wafer RF and DC Testing
- X 100% Visual Inspection to MIL-STD-883 Method 2010

General Description

Mimix Broadband's 17.0-27.0 GHz GaAs MMIC transmitter has a small signal conversion gain of 0.0 dB with a third order intercept of +12.0 dBm across the band. The device is a single fundamental mixer followed by a single stage amplifier. This MMIC uses Mimix Broadband's 0.15 μm GaAs PHEMT device model technology, and is based upon electron beam lithography to ensure high repeatability and uniformity. The chip has surface passivation to protect and provide a rugged part with backside via holes and gold metallization to allow either a conductive epoxy or eutectic solder die attach process. This device is well suited for Millimeter-wave Point-to-Point Radio, LMDS, SATCOM and VSAT applications.

Chip Device Layout

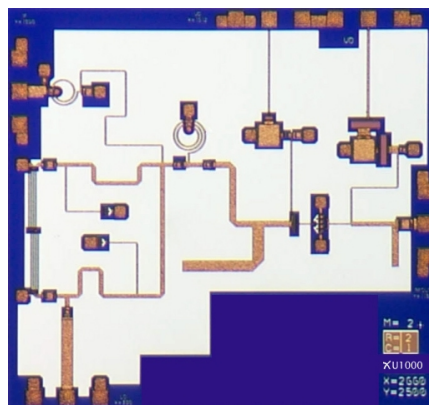

Absolute Maximum Ratings

Supply Voltage (Vd)	+6.0 VDC
Supply Current (Id)	50 mA
Gate Bias Voltage (Vg)	+0.3 VDC
Input Power (IF Pin)	+10 dBm
Storage Temperature (Tstg)	-65 to +165 °C
Operating Temperature (Ta)	-55 to MTF Table ³
Channel Temperature (Tch)	MTF Table ³

(3) Channel temperature affects a device's MTF. It is recommended to keep channel temperature as low as possible for maximum life.

Electrical Characteristics (Ambient Temperature T = 25 °C)

Parameter	Units	Min.	Typ.	Max.
Frequency Range (RF) Upper Side Band	GHz	17.0	-	27.0
Frequency Range (RF) Lower Side Band	GHz	17.0	-	27.0
Frequency Range (LO)	GHz	15.0	-	29.0
Frequency Range (IF)	GHz	DC	-	2.0
Output Return Loss RF (S22)	dB	-	7.0	-
Input Return Loss LO (S11)	dB	-	8.0	-
Small Signal Conversion Gain IF/RF (S21)	dB	-	0.0	-
LO Input Drive (P _{LO})	dBm	-	+12.0	-
Isolation LO/RF	dB	-	10.0	-
Input Power for 1 dB Compression (P1dB) ^{1,2}	dBm	-	+2.0	-
Input Third Order Intercept (IIP3) ^{1,2}	dBm	-	+12.0	-
Drain Bias Voltage (Vd)	VDC	-	+3.0	+5.5
Gate Bias Voltage (Vg)	VDC	-1.0	-0.5	0.0
Supply Current (Id) (Vd=3.0V, Vg=-0.5V Typical)	mA	-	23	46

(1) Optional power bias Vd=5.5V, Id=45mA will typically yield improved P1dB.

(2) Measured using constant current.

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com


Page 1 of 5

Characteristic Data and Specifications are subject to change without notice. ©2005 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.

17.0-27.0 GHz GaAs MMIC Transmitter

May 2005 - Rev 13-May-05

Mechanical Drawing

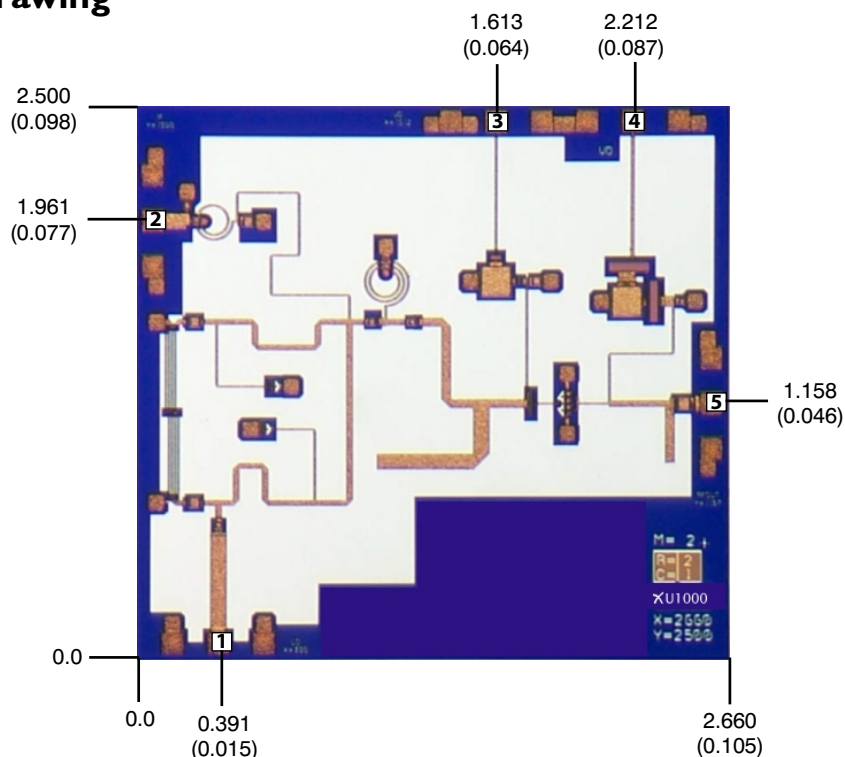

(Note: Engineering designator is 25KTX_05N3)


Units: millimeters (inches) Bond pad dimensions are shown to center of bond pad.
Thickness: 0.110 +/- 0.010 (0.0043 +/- 0.0004), Backside is ground, Bond Pad/Backside Metallization: Gold
All Bond Pads are 0.100 x 0.100 (0.004 x 0.004).
Bond pad centers are approximately 0.109 (0.004) from the edge of the chip.
Dicing tolerance: +/- 0.005 (+/- 0.0002). Approximate weight: 4.124 mg.

Bond Pad #1 (LO)
Bond Pad #2 (IF)


Bond Pad #3 (Vg)
Bond Pad #4 (Vd)

Bond Pad #5 (RF Out)

Bias Arrangement

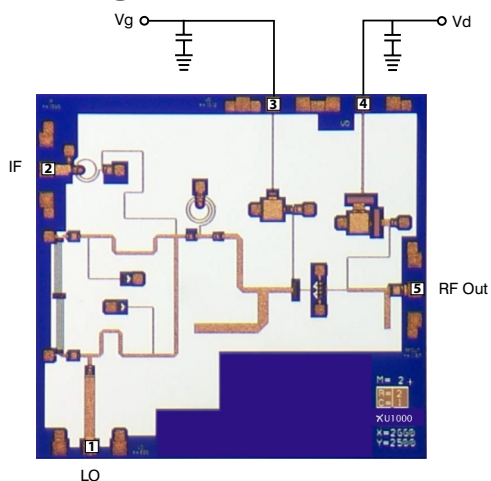

Bypass Capacitors - See App Note [2]

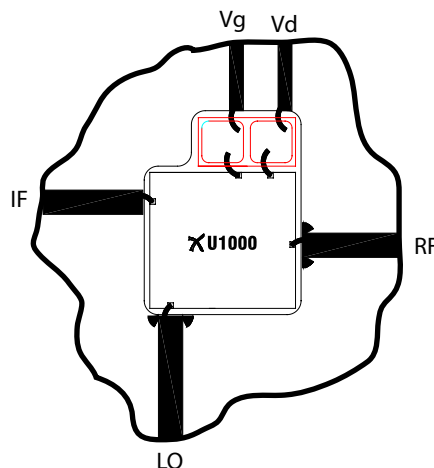

17.0-27.0 GHz GaAs MMIC Transmitter

App Note [1] Biasing - As shown in the bonding diagram, this device has a single gain stage. Nominal bias is $V_d=3V$, $I_d=23mA$. Power bias may be as high as $V_d=5.5V$, $I_d=45mA$. It is also recommended to use active biasing to keep the currents constant as the RF power and temperature vary; this gives the most reproducible results. Depending on the supply voltage available and the power dissipation constraints, the bias circuit may be a single transistor or a low power operational amplifier, with a low value resistor in series with the drain supply used to sense the current. The gate of the pHEMT is controlled to maintain correct drain current and thus drain voltage. The typical gate voltage needed to do this is $-0.5V$. Typically the gate is protected with Silicon diodes to limit the applied voltage. Also, make sure to sequence the applied voltage to ensure negative gate bias is available before applying the positive drain supply.

App Note [2] Bias Arrangement - Each DC pad (V_d and V_g) needs to have DC bypass capacitance (~ 100 - 200 pF) as close to the device as possible. Additional DC bypass capacitance (~ 0.01 uF) is also recommended.

MTTF Tables

These numbers were calculated based on accelerated life test information and thermal model analysis received from the fabricating foundry.

Backplate Temperature	Channel Temperature	Rth	MTTF Hours	FITs
55 deg Celsius	77 deg Celsius	-	2.45E+12	4.07E-04
75 deg Celsius	97 deg Celsius	319.5° C/W	1.39E+11	7.21E-03
95 deg Celsius	117 deg Celsius	-	1.05E+10	9.51E-02


Bias Conditions: $V_d=3.0V$, $I_d=23$ mA

Backplate Temperature	Channel Temperature	Rth	MTTF Hours	FITs
55 deg Celsius	133 deg Celsius	-	2.76E+09	3.62E-01
75 deg Celsius	153 deg Celsius	306.7° C/W	3.32E+08	3.01E+00
95 deg Celsius	173 deg Celsius	-	4.83E+07	2.07E+01


Bias Conditions: $V_d=5.5V$, $I_d=46$ mA

17.0-27.0 GHz GaAs MMIC Transmitter

May 2005 - Rev 13-May-05



Typical Application

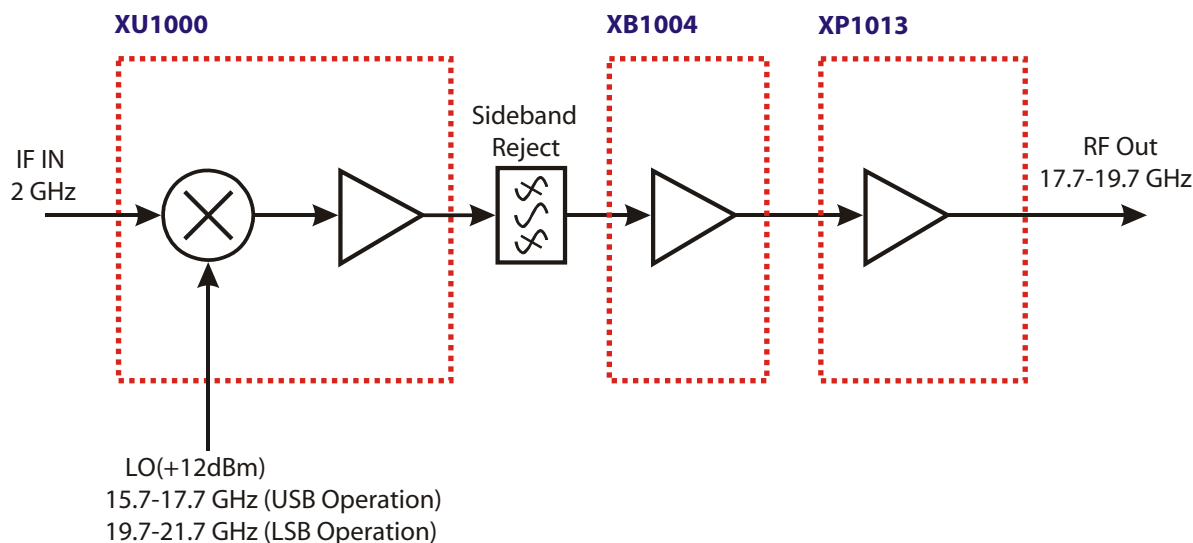


Mimix Broadband MMIC-based 17.0-27.0 GHz Transmitter Block Diagram

(Changing LO and IF frequencies as required allows design to operate as high as 27 GHz)

Also See: Multiplier selection guide at www.mimixbroadband.com for multipliers that can be used to drive the XU1000.

17.0-27.0 GHz GaAs MMIC Transmitter



May 2005 - Rev 13-May-05

Handling and Assembly Information

CAUTION! - Mimix Broadband MMIC Products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- *Do not ingest.*
- *Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.*
- *Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.*

Life Support Policy - Mimix Broadband's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President and General Counsel of Mimix Broadband. As used herein: (1) Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. (2) A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ESD - Gallium Arsenide (GaAs) devices are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic containers, which should be opened in cleanroom conditions at an appropriately grounded anti-static workstation. Devices need careful handling using correctly designed collets, vacuum pickups or, with care, sharp tweezers.

Die Attachment - GaAs Products from Mimix Broadband are 0.100 mm (0.004") thick and have vias through to the backside to enable grounding to the circuit. Microstrip substrates should be brought as close to the die as possible. The mounting surface should be clean and flat. If using conductive epoxy, recommended epoxies are Ablestick 84-1LMI or 84-1LMIT cured in a nitrogen atmosphere per manufacturer's cure schedule. Apply epoxy sparingly to avoid getting any on to the top surface of the die. An epoxy fillet should be visible around the total die periphery. If eutectic mounting is preferred, then a fluxless gold-tin (AuSn) preform, approximately 0.001² thick, placed between the die and the attachment surface should be used. A die bonder that utilizes a heated collet and provides scrubbing action to ensure total wetting to prevent void formation in a nitrogen atmosphere is recommended. The gold-tin eutectic (80% Au 20% Sn) has a melting point of approximately 280°C (Note: Gold Germanium should be avoided). The work station temperature should be 310°C ± 10°C. Exposure to these extreme temperatures should be kept to minimum. The collet should be heated, and the die pre-heated to avoid excessive thermal shock. Avoidance of air bridges and force impact are critical during placement.

Wire Bonding - Windows in the surface passivation above the bond pads are provided to allow wire bonding to the die's gold bond pads. The recommended wire bonding procedure uses 0.076 mm x 0.013 mm (0.003" x 0.0005") 99.99% pure gold ribbon with 0.5-2% elongation to minimize RF port bond inductance. Gold 0.025 mm (0.001") diameter wedge or ball bonds are acceptable for DC Bias connections. Aluminum wire should be avoided. Thermo-compression bonding is recommended though thermosonic bonding may be used providing the ultrasonic content of the bond is minimized. Bond force, time and ultrasonics are all critical parameters. Bonds should be made from the bond pads on the die to the package or substrate. All bonds should be as short as possible.