

2.4W STEREO AUDIO AMPLIFIER——YD2025H


DESCRIPTION

The YD2025H is a monolithic integrated audio amplifier in a 16-pin plastic dual in line package. It is designed for portable cassette players and radios.

FEATURES

- *Working Voltage down to 3V
- *Few External components
- *High channel isolation
- *Voltage gain up to 45dB (Adjustable with external resistor)
- *Soft clipping
- *Internal Thermal protection

BLOCK DIAGRAM

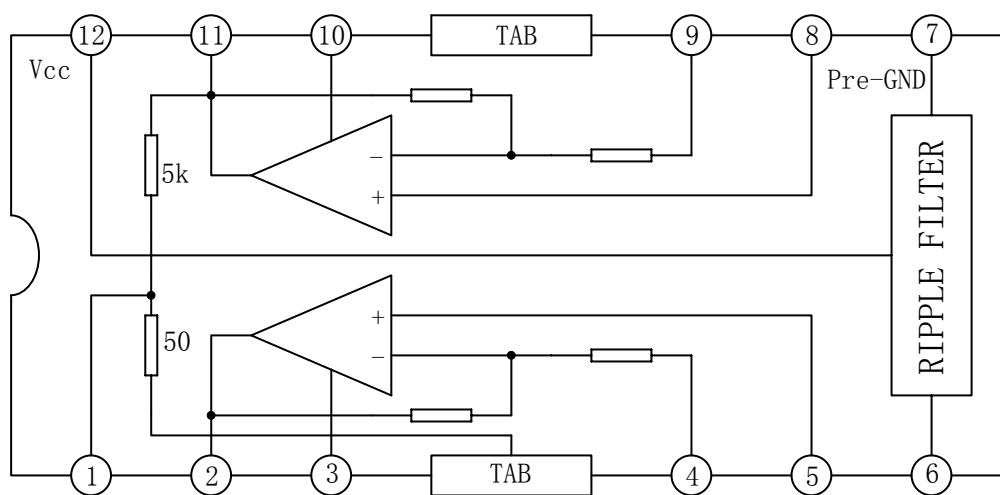

WuXi YouDa Electronics Co., Ltd

Add: No.5 Xijin Road, National Hi-Tech Industrial Development Zone, Wuxi Jiangsu China
Tel: 86-510-85205117 86-510-85205106 Fax: 86-510-85205110 Website: www.e-youda.com
SHENZHEN OFFICE Tel: 86-755-83740369 Fax: 86-755-83741418

ABSOLUTE MAXIMUM RATINGS (Tamb=25℃)

PARAMETER		SYMBOL	VALUE	UNIT
Supply Voltage		V _{cc}	15	V
Output Peak Current		I _{op}	1.5	A
Power Dissipation	80*60*1.2mm ³ PCB	P _D	3.5	W
	No Heat Sink	P _D	1.6	W
Ambient operating temperature range		T _{opr}	-20~+75	℃
Storage Temperature		T _{stg}	-40~+150	℃


Electrical CHARACTERISTICS

(Tamb=20℃, Vcc=9V, f=1kHz, Stereo, Unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS		NIN	TYP	MAX	UNIT
Supply Voltage	Vcc			3		12	V
Quiescent Current	Iccq				40	50	mA
Quiescent Output Voltage	Vo				4.5		V
Voltage Gain	Gv	Stereo		43	45	47	dB
		Bridge		49	51	53	
Voltage Gain Difference	Δ Gv					± 1	dB
Input Impedance	Zi				30		kΩ
Output Power (STEREO)	Po (THD =10%)	Vcc=9V, RL=4Ω		1.7	2.4		W
		Vcc=9V, RL=8Ω			1.3		
		Vcc=6V, RL=4Ω		0.7	1.0		
		Vcc=6V, RL=8Ω			0.6		
		Vcc=3V, RL=4Ω			0.1		
Output Power (BTL)		Vcc=9V, RL=8Ω			4.7		
		Vcc=6V, RL=4Ω			2.8		
Distortion	THD	Stereo ,RL=4Ω, Po=250mW			0.3	1.5	%
		BTL,RL=4Ω, Po=250mW			0.5		
Supply Voltage Rejection	RR	Rg=0, Gv=45dB, Vr=150mV, f=100Hz		40	46		dB
Input Noise Voltage	VNI	Gv=45dB, BPF=20Hz ~20kHz	Rg=0		1.5	3	μ V
			Rg=10kΩ		3	6	
Cross-Talk	CT	Rg=10kΩ, f=1kHz, RI=4Ω, Po=1W		40	55		dB

APPLICATION CIRCUIT

(1) YD2025H TYPE APPLICATION

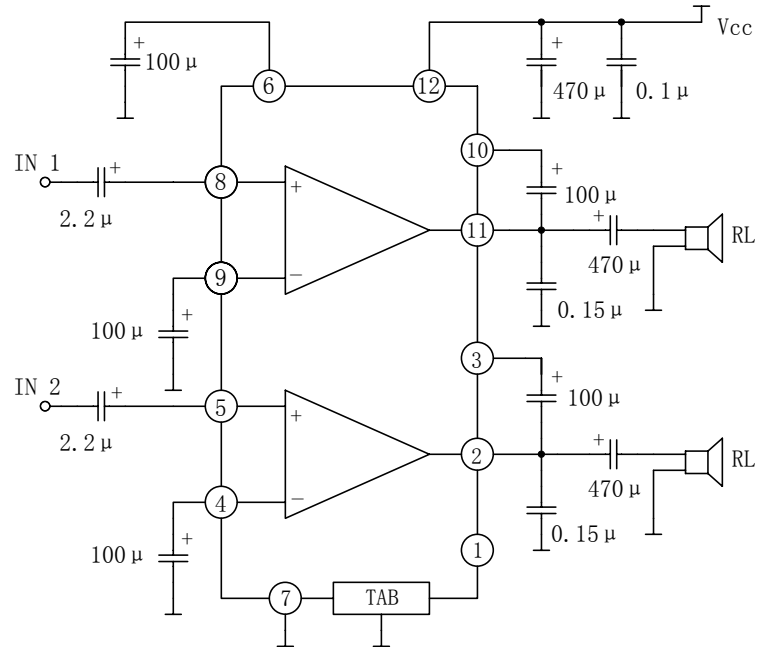

(2) YD2025H BTL APPLICATION

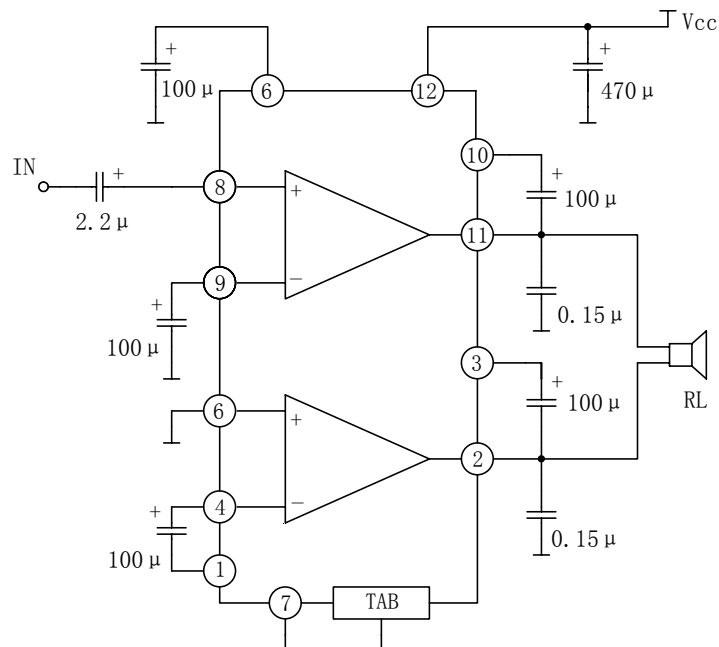

OUTLINE DRAWING

12-DIPH-300

