
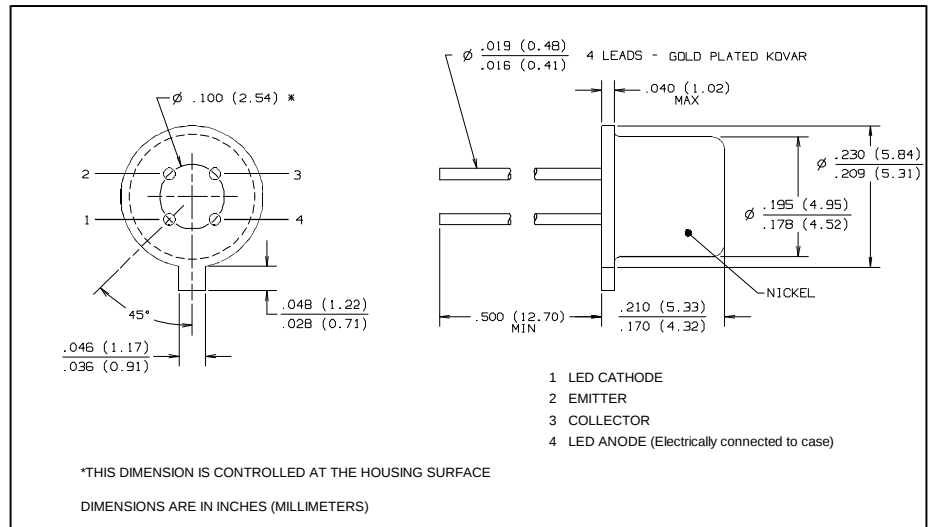


Optically Coupled Isolator

Type 3C92C, 3C92CHR, 3C92CTX, 3C92CTXV

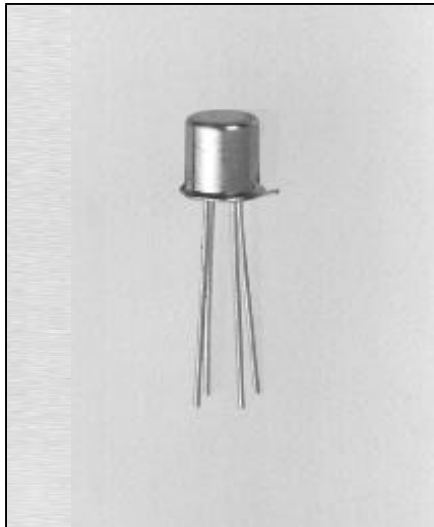

Features

- TO-72 hermetic package
- 1 kVDC electrical isolation
- High current transfer ratio

Description

The 3C92C is an optically coupled isolator consisting of an infrared emitting diode and an NPN silicon phototransistor mounted in a hermetically sealed TO-72 package.

Typical screening and lot acceptance tests are provided on page 13-4.

The 3C92CHR device has been 100% screened as a TXV device although Group B and C testing is not performed.

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Input to Output Isolation Voltage	±1kVDC ⁽¹⁾
Operating Temperature Range	-55° C to +125° C
Storage Temperature Range	-65° C to +150° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case, 5 sec. with soldering iron]	240° C ⁽²⁾
Power Dissipation (Output Transistor)	200 mW ⁽³⁾
Power Dissipation (Input Diode)	60 mW ⁽⁴⁾

Notes:

- (1) Measured with input leads shorted together and output leads shorted together.
- (2) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
- (3) Derate linearly 2.0 mW/° C above 25° C.
- (4) Derate linearly 0.60 mW/° C above 65° C.

Types 3C92C, 3C92CHR, 3C92CTX, 3C92CTXV

Electrical Characteristics ($T_A = 25^\circ \text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITION
Input Diode						
V_F	Forward Voltage			1.2 1.5	V V	$I_F = 2 \text{ mA}$ $I_F = 50 \text{ mA}$
V_R	Reverse Voltage	7			V	$I_R = 0.1 \text{ mA}$
I_R	Reverse Current			1	μA	$V_R = 3 \text{ V}$
C_{IN}	Diode Capacitance		25		pF	$V = 0, f = 1 \text{ MHz}$
Phototransistor						
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	50			V	$I_C = 10 \text{ mA}$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	7			V	$I_C = 10 \mu\text{A}$
I_{CEO}	Collector-Emitter Leakage Current			10 50	nA nA	$V_{CE} = 5 \text{ V}$ $V_{CE} = 50 \text{ V}$
Coupled						
$I_{C(ON)}$	On-State Collector Current	4.0 3.0		— 20	mA mA	$I_F = 10 \text{ mA}, V_{CE} = 5 \text{ V}$ $I_F = 10 \text{ mA}, V_{CE} = 0.4 \text{ V}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage			0.4	V	$I_F = 50 \text{ mA}, I_C = 10 \text{ mA}$
t_{on}	Turn on Time			9	μs	$V_{CC} = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega$
t_{off}	Turn off Time			6	μs	
C_{IO}	Input-to-Output Capacitance		2	2.5	pF	$f = 1 \text{ MHz}$
R_{IO}	Isolation Resistance	10^9			Ω	$V_{IO} = +1 \text{ kV}$

Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396