



LA5685N

Multifunction, Multi-Power Supply IC for Car Radios

Overview

The LA5685N is a multifunction, multipower supply IC developed for car radios. It has 8.5V AM output, 8.5V FM output, 8.5V common output, 5.2V microcomputer output, and 5.1V bias output, making it the ideal power supply for LA1833 and LA1887 ICs for FM/AM tuner systems.


Features

- A total of five built-in outputs : $V_1=8.5V$ (AM), $V_2=8.5V$ (FM), $V_3=8.5V$ (common), $V_4=5.2V$ (microcomputer), and $V_5=5.1V$.
- R ON/OFF, FM/AM switching functions.
- Minimal static current for backup (120 μA typ).
- Built-in overvoltage protection circuit (V_1 , V_2 , and V_3 go off at 28V (typ.), V_4 and V_5 go off at 56V (typ)).
- Built-in thermal shutdown circuit (output goes off at $T_j=170^{\circ}C$ (typ.)).
- Built-in short protection circuit.

Package Dimensions

unit:mm

3046B-SIP10F

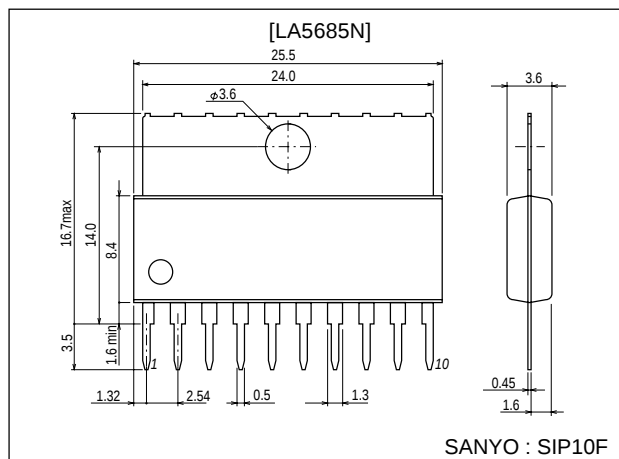

Specifications

Maximum Ratings at $T_a = 25^{\circ}C$

Parameter	Symbol	Conditions	Ratings	Unit
Input voltage	$V_{CC\ max1}$	4% duty pulse width 200ms pulse input (input pulse when output on)	75	V
	$V_{CC\ max2}$		25	V
Output current	$I_1\ max$		80	mA
	$I_2\ max$		100	mA
	$I_3\ max$		200	mA
	$I_4\ max$		50	mA
	$I_5\ max$		5	mA
Allowable power dissipation	$P_d\ max$		2.45	W
Operating temperature	T_{opr}		-35 to $+85$	$^{\circ}C$
Storage temperature	T_{stg}		-40 to $+125$	$^{\circ}C$

Operating Conditions at $T_a = 25^{\circ}C$

Parameter	Symbol	Conditions	Ratings	Unit
Power supply voltage	$V_{CC\ op}$	9V to 10.5V not regulated	9 to 16	V
B/U voltage	B/U	6V to 8.5V not regulated	6 to 16	V

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

40500TN (KT)/8282TS No.4185-1/4

LA5685N



Operating Characteristics at $T_a = 25^\circ\text{C}$, unless otherwise noted, $V_{CC}=12\text{V}$, R-ON=FM/AM=5V

External 33 μF OS capacitor connected to V1, V2, V3, and V4

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Static current	I_{CC1}	R-ON=FM/AM=0V		4.5	7.0	mA
	I_{CC2}	R-ON=FM/AM=5V		4.5	7.0	mA
Output voltage	V1	FM/AM=0V, $I_1=20\text{mA}$	7.8	8.5	9.2	V
	V2	FM/AM=5V, $I_2=50\text{mA}$	7.8	8.5	9.2	V
	V3	$I_3=100\text{mA}$	7.8	8.5	9.0	V
	V4	$I_4=20\text{mA}$	4.9	5.2	5.5	V
	V5	$I_5=1\text{mA}$	V4-0.5		V4	V
Line regulation	$\Delta V1$ line	FM/AM=0V, $11\text{V}<V_{CC}<15\text{V}$, $I_1=20\text{mA}$			50	mV
	$\Delta V2$ line	FM/AM=5V, $11\text{V}<V_{CC}<15\text{V}$, $I_1=50\text{mA}$			50	mV
	$\Delta V3$ line	$I_3=100\text{mA}$, $11\text{V}<V_{CC}<15\text{V}$			50	mV
	$\Delta V4$ line	$I_4=20\text{mA}$, $11\text{V}<V_{CC}<15\text{V}$			50	mV
	$\Delta V5$ line	$I_5=1\text{mA}$, $11\text{V}<V_{CC}<15\text{V}$			50	mV
B/U static current	$I_{B/U}$	B/U=16V, $V_{CC}=0\text{V}$			0.3	mA
V5 on-off TH voltage	V_{5TH}	B/U=12V	6	7	8	V
R-ON on voltage	R-ON ON		2.5		V_{CC}	V
R-ON off voltage	R-ON OFF		-0.3		+1.0	V
FM/AM on voltage	FM/AM ON		2.5		V_{CC}	V
FM/AM off voltage	FM/AM OFF		-0.3		+1.0	V
Input current R-ON	I_{R-ON}	R-ON=5V			0.2	mA
Input current FM/AM	$I_{FM/AM}$	FM/AM=5V			0.2	mA
Load regulation	$\Delta V1$ Load	FM/AM=0V, $1\text{mA}<I_1<65\text{mA}$			50	mV
	$\Delta V2$ Load	FM/AM=5V, $1\text{mA}<I_2<90\text{mA}$			50	mV
	$\Delta V3$ Load	$1\text{mA}<I_3<160\text{mA}$			100	mV
	$\Delta V4$ Load	$1\text{mA}<I_4<40\text{mA}$			50	mV
	$\Delta V5$ Load	$0.1\text{mA}<I_5<2\text{mA}$			200	mV
Ripple regulation	Rr1	FM/AM=0V, $f=120\text{Hz}$, $I_1=20\text{mA}$	40*			dB
	Rr2	FM/AM=5V, $f=120\text{Hz}$, $I_2=50\text{mA}$	40*			dB
	Rr3	$f=120\text{Hz}$, $I_3=100\text{mA}$	40*			dB
	Rr4	$f=120\text{Hz}$, $I_4=20\text{mA}$	40*			dB
	Rr5	$f=120\text{Hz}$, $I_5=1\text{mA}$	40*			dB


Note : * indicates design guaranteed value.

Pin Assignment

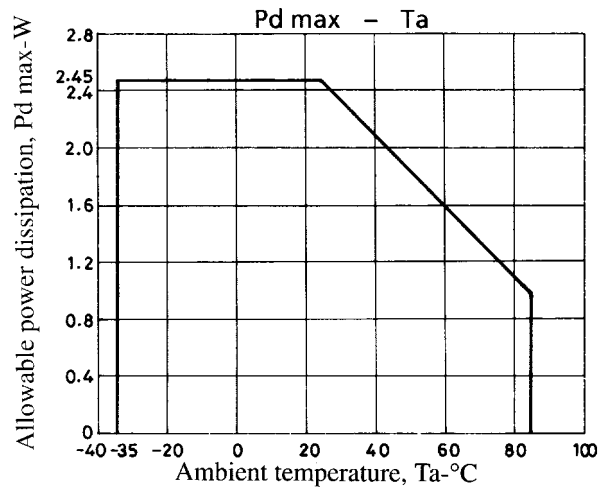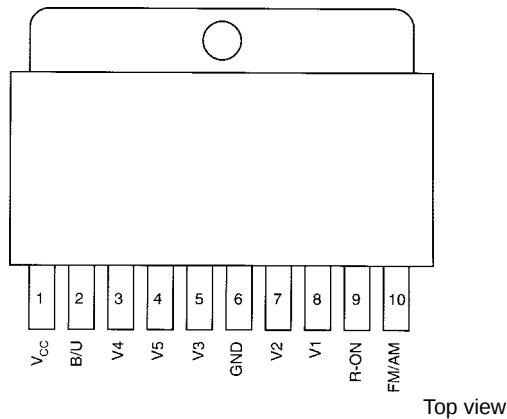


LA5685N


Block Diagram

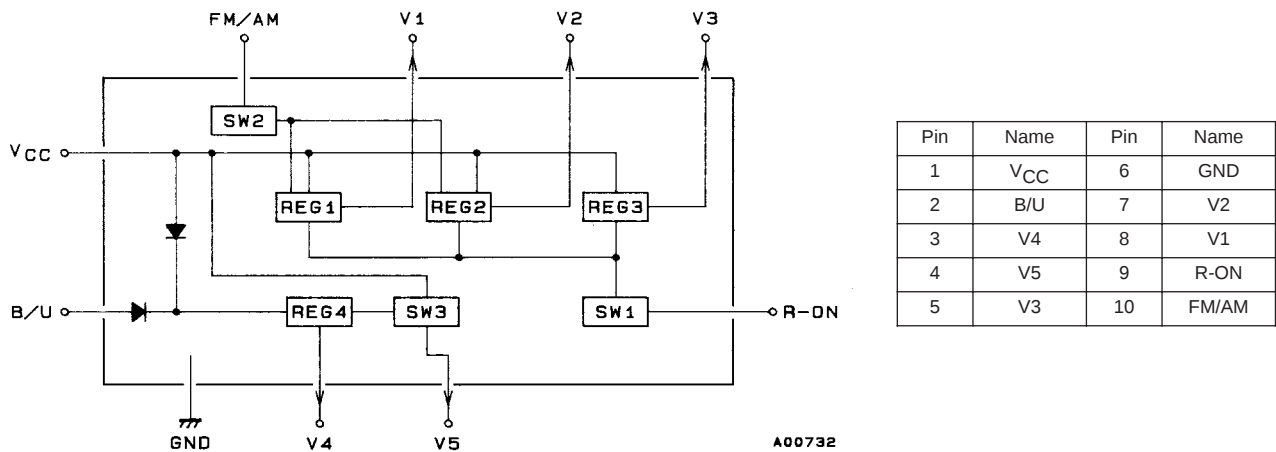

Test Circuit

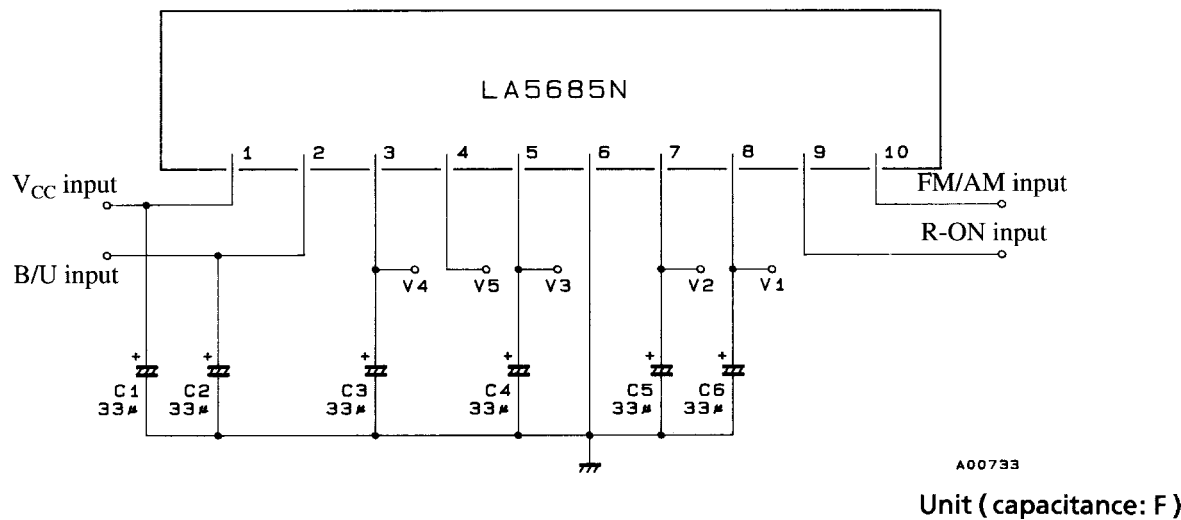

Sample Application Circuit

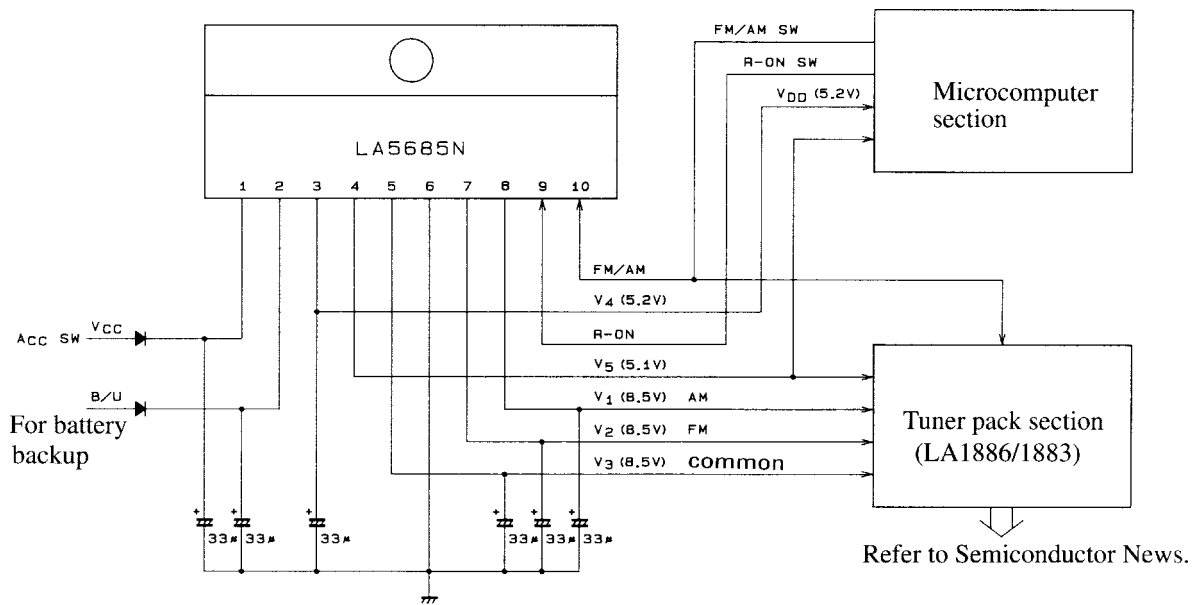

Input/Output Table

Inputs				Outputs				
A _{CC}	B/U	R-ON	FM/AM	V1	V2	V3	V4	V5
L	L	*	*	L	L	L	L	L
L	H	*	*	L	L	L	H	L
H	*	H	L	H	L	H	H	H
H	*	H	H	L	H	H	H	H
H	*	L	*	L	L	L	H	H

- Negative voltages are not to be applied to these pins.
- Always use input/output capacitors (instead of for V5).
(We recommended OS capacitors with good characteristics at low temperature.)
- Built-in overvoltage protection circuit (V1, V2, and V3 go off at 28V (typ.), V4 and V5 go off at 56V (typ.))
- Built-in thermal shutdown circuit (output goes off at T_j=170°C (typ.))
- Built-in short protection circuit.

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 2000. Specifications and information herein are subject to change without notice.