

NX6414EH

LASER DIODE

1 490 nm InGaAsP MQW-DFB LASER DIODE

FOR GIGABIT ETHERNET AND Point to Point APPLICATION

DESCRIPTION

The NX6414EH is a 1 490 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode with InGaAs monitor PIN-PD.

APPLICATIONS

- Gigabit Ethernet
- Point to Point

FEATURES

• Optical output power

- Low threshold current
- Differential efficiency
- Wide operating temperature range
- InGaAs monitor PIN-PD
- CAN package
- Focal point

∲ 5.6 mm 6.7 mm

 $P_0 = 14.0 \text{ mW}$

Tc = -40 to $+85^{\circ}C$

 $l_{th} = 10 \text{ mA}$ $\eta_d = 0.25 \text{ W/A}$




R08DS0042EJ0100

Rev.1.00



PACKAGE DIMENSIONS (UNIT: mm)

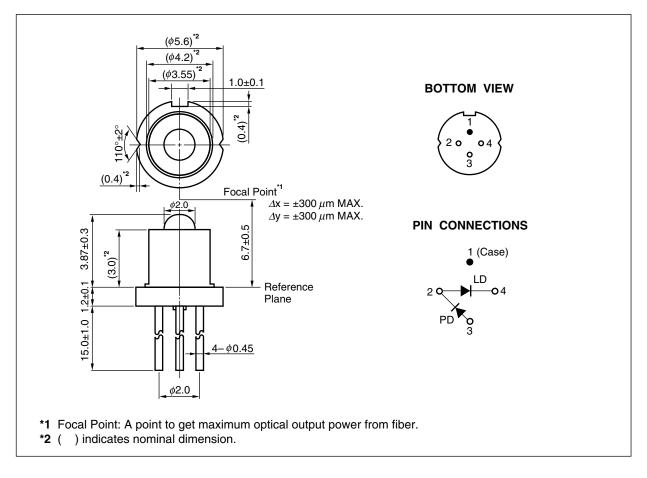



ORDERING INFORMATION

Part Number	Package	Pin Connections
NX6414EH	4-pin CAN with ball lens cap	

Remarks 1. The color of ball lens cap might be observed differently.

2. The hermetic test will be performed as AQL 1.0%.




ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
Optical Output Power	P₀	20	mW
Forward Current of LD	lf	150	mA
Reverse Voltage of LD	VR	2.0	V
Forward Current of PD	lf	10.0	mA
Reverse Voltage of PD	VR	15	V
Operating Case Temperature	Tc	-40 to +85	°C
Storage Temperature	Tstg	-40 to +85	°C
Lead Soldering Temperature	Tsld	350 (3 sec.)	°C
Relative Humidity (noncondensing)	RH	85	%

ELECTRO-OPTICAL CHARACTERISTICS (Tc = -40 to $+85^{\circ}$ C, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Operating Voltage	Vop	P _o = 14.0 mW		1.1	1.6	V
Threshold Current	Ith	Tc = 25°C	5	10	15	mA
			3		50	
Differential Efficiency	$\eta_{ m d}$	P _o = 14.0 mW	0.14		0.6	W/A
Peak Emission Wavelength	λρ	CW, P₀ = 14.0 mW	1 480		1 500	nm
Side Mode Suppression Ratio	SMSR	P _o = 14.0 mW	30	45		dB
Focal Distance	Df		6.2	6.7	7.2	mm
Rise Time	tr	Ib = Ith, 10-90%		0.1	0.2	ns
Fall Time	tr	Ib = Ith, 90-10%		0.1	0.2	ns
Monitor Current	lm	$V_{R} = 1.5 V, P_{0} = 14.0 mW$	150	500	1 200	μA
Monitor Dark Current	lo	V _R = 5 V			100	nA
Tracking Error ¹	γ	$I_m = const.$ (@ P _o = 14.0 mW, T _c = 25°C)	-1.0		1.0	dB

***1** Tracking Error: γ

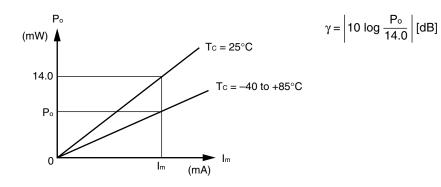



REFERENCE

Document Name	Document No.	
Opto-Electronics Devices Pamphlet ¹	PX10160E	

*1 Published by the former NEC Electronics Corporation.



SAFETY INFORMATION ON THIS PRODUCT



SEMICONDUCTOR LASER



AVOID EXPOSURE-Invisible Laser Radiation is emitted from this aperture

Warning Laser Beam	 A laser beam is emitted from this diode during operation. The laser beam, visible or invisible, directly or indirectly, may cause injury to the eye or loss of eyesight. Do not look directly into the laser beam.
	Avoid exposure to the laser beam, any reflected or collimated beam.
Caution GaAs Products	This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.
	• Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
	 Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
	Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
	• Do not burn, destroy, cut, crush, or chemically dissolve the product.
	• Do not lick the product or in any way allow it to enter the mouth.



Revision	History
----------	---------

		Description		
Rev.	Date	Page	Summary	
1.00	Jun 10, 2011	-	First edition issued	

Notice

- All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application categorized as "Specific" written consent of Renesas Electronics should be for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The recommended where you have failed to obtain the prior written consent of Renesas Electronics and the prior written consent of Renesas Electronics as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product for any application application as exploration categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product for which there are supported as the specific as the specific".
- "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools
- personal electronic equipment; and industrial robots.
 "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically
 designed for life support.
- *Specific*: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and mafunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and mafunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Refer to "http://www.renesas.com/" for the latest and detailed information



SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Renesas Electronics America Inc. 2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A. Tel: +1-408-588-4000, Fax: +1-408-588-6130 Renesas Electronics Canada Limited 1011 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada Tel: +1-905-898-5441, Fax: +1-905-898-3220 Renesas Electronics Europe Limited Dukes Meadow, Millboard Road, Boume End, Buckinghamshire, SL8 5FH, U.K Tel: +44-1628-585-100, Fax: +44-1628-585-900 Renesas Electronics Europe GmbH Arcadiastrasse 10, 40472 Düsseldorf, Germany Tel: +49-211-65030, Fax: +44-1628-585-900 Renesas Electronics Compe GmbH Arcadiastrasse 10, 40472 Düsseldorf, Germany Tel: +49-211-65030, Fax: +44-1628-585-900 Renesas Electronics (Shanghai) Co., Ltd. 7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China Tel: +480-12453-1155, Fax: +480-21638-7659 Renesas Electronics (Shanghai) Co., Ltd. 10th 1204, 205, A221 Center, No.1233 Lujiazu Ring Rd., Pudong District, Shanghai 200120, China Tel: +482-13477-1818, Fax: +480-21687-7858 Renesas Electronics Hong Kong Limited Unit 1001, 101-101, 10F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong Tel: +482-2866-9318, Fax: +4852-2886-9022/9044 Renesas Electronics Taiwan Co., Ltd. 7F, No. 363 Fu Shing North Road Taipel, Taiwan Tel: +486-2-4175-9900, Fax: +4882-24175-9670 Renesas Electronics Taiwan Co., Ltd. 1 harbourFront Avenue, #06-10, keppel Bay Tower, Singapore 098632 Tel: +656-2175-9900, Fax: +4882-24175-9670 Renesas Electronics Kong Co., Ltd. 1 harbourFront Avenue, #06-10, keppel Bay Tower, Singapore 098632 Tel: +656-2175-9900, Fax: +4892-2405-9610 Renesas Electronics Kong Co., Ltd. 11-Samik Lavied or Bildy, 720-2 Veoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea Tel: +60-37755-9390, Fax: +480-2405-9510