

ADVANCE PRODUCT SUMMARY

SKY77321: PA Module for Tri-Band EGSM / GPRS

Applications

- Tri-band cellular handsets encompassing
 - Class 4 EGSM900
 - Class 1 DCS1800 PCS1900
 - GPRS (up to Class 12) multislot operation

Features

- High efficiency
 - EGSM900 53%
 - DCS1800 47%
 - PCS1900 47%
- Input/output matching
 - 50 Ω internal
- Small outline
 - 6 mm x 6 mm
- Low profile
 - 1.2 mm maximum
- Low APC current
 - 10 μ A typical
- Gold plated, lead-free contacts

The SKY77321 Power Amplifier Module (PAM) is designed in a compact form factor for tri-band cellular handsets comprising EGSM900, DCS1800, and PCS1900 operation. It also supports Class 12 General Packet Radio Service (GPRS) multislot operation.

The PAM consists of an EGSM900 PA block, a DCS1800/PCS1900 PA block, impedance-matching circuitry for 50 Ω input and output, and bias control circuitry. Two separate Heterojunction Bipolar Transistor (HBT) PA blocks are fabricated on a single Gallium Arsenide (GaAs) die. One PA block operates in the EGSM900 band and the other PA block supports both the DCS1800 and the PCS1900 bands. Optimized for Li-Ion battery operation, both PA blocks share common power supply pins to distribute current. A custom CMOS integrated circuit provides the internal interface circuitry, including a current amplifier that minimizes the required power control current (I_{APC}) to 10 μ A, typical. The GaAs die, the Silicon (Si) die, and passive components are mounted on a multi-layer laminate substrate. The assembly is encapsulated with plastic overmold.

The RF input and output ports are internally matched to 50 Ω to reduce the number of external components for a tri-band design. Extremely low leakage current (2 μ A, typical) of the dual PA module maximizes handset standby time. The SKY77321 also contains band-select switching circuitry to select EGSM (logic 0) and DCS/PCS (logic 1) as determined from the Band Select (BS) signal. In the block diagram shown below, the BS pin selects the PA output (DCS/PCS OUT or EGSM OUT) while the Analog Power Control (APC) controls the level of output power.

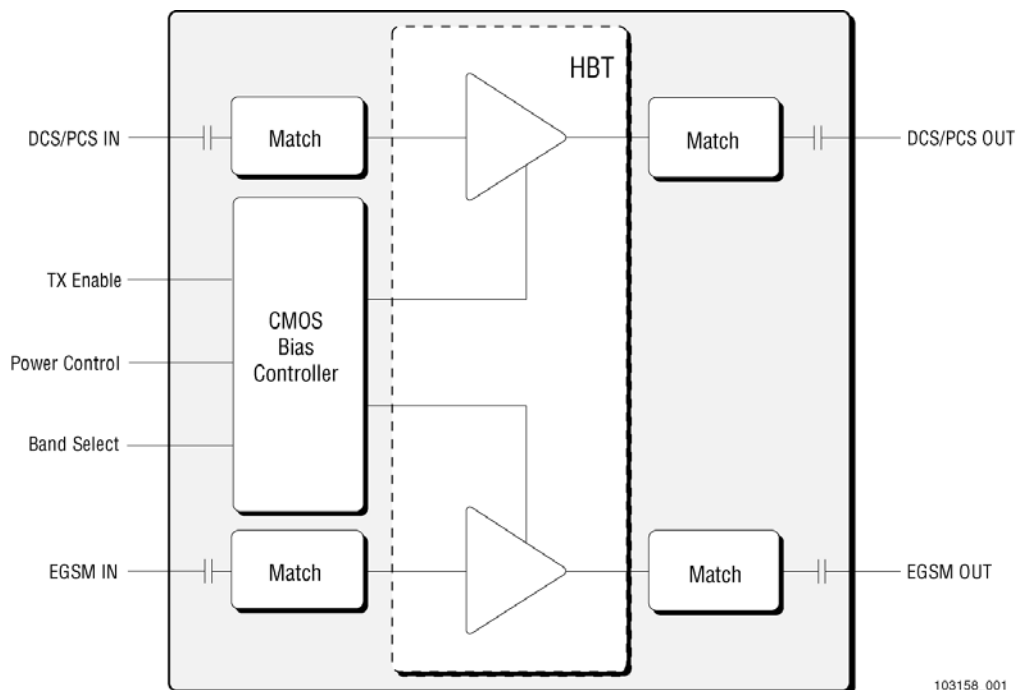


Figure 1. Functional Block Diagram

© 2002–2004, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products. These materials are provided by Skyworks as a service to its customers and may be used for informational purposes only. Skyworks assumes no responsibility for errors or omissions in these materials. Skyworks may make changes to its products, specifications and product descriptions at any time, without notice. Skyworks makes no commitment to update the information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from future changes to its products and product descriptions.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as may be provided in Skyworks' Terms and Conditions of Sale for such products, Skyworks assumes no liability whatsoever.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF SKYWORKS™ PRODUCTS INCLUDING WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. SKYWORKS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THESE MATERIALS.

Skyworks™ products are not intended for use in medical, lifesaving or life-sustaining applications. Skyworks' customers using or selling Skyworks™ products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

The following are trademarks of Skyworks Solutions, Inc.: Skyworks™, the Skyworks symbol, and "Breakthrough Simplicity"™. Product names or services listed in this publication are for identification purposes only, and may be trademarks of third parties. Third-party brands and names are the property of their respective owners.

Additional information, posted at www.skyworksinc.com, is incorporated by reference.