


品名：5W4VC-QXXXX

单位：mm

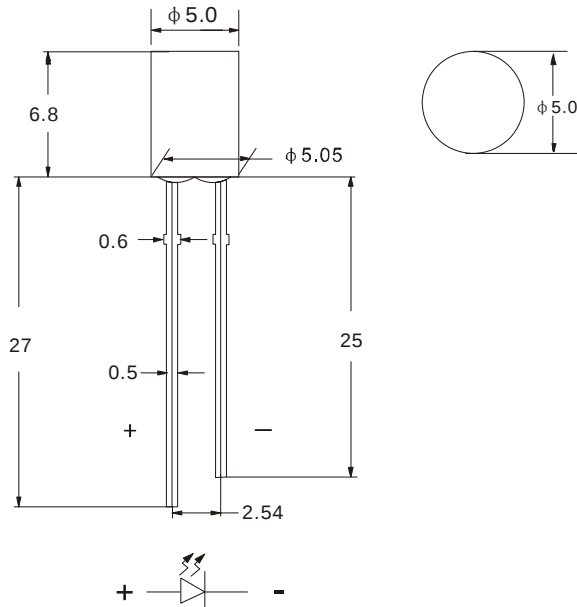

NOTE:TOLERANCE±0.5mm

Parameter		Symbol		Min.		Typ.		Max.		Unit	Test Condition
Luminous Intensity		I _v		600				850		mcd	If=20mA
Viewing Angle		2 θ 1/2		110				120		Deg	
Forward Voltage		V _f		2.8				4.0		V	If=20mA
Reverse Current		I _R				10				μ A	VR=5V
BIN Grade		Top		Right		Bottom		Left			
		X	Y	X	Y	X	Y	X	Y		
BIN	A	0.23	0.23	0.24	0.20	0.22	0.17	0.20	0.19		
BIN	B	0.25	0.25	0.26	0.23	0.24	0.20	0.23	0.23		
BIN	C	0.27	0.29	0.29	0.26	0.26	0.23	0.25	0.25		
BIN	D	0.29	0.32	0.32	0.30	0.29	0.26	0.27	0.29		
BIN	E	0.32	0.36	0.34	0.34	0.32	0.30	0.29	0.32		

■ ABSOLUTE MAXIMUM RATINGS: (Ta = 25℃)

■ OPERATING TEMPERATURE: -40℃ TO +80℃

■ LEAD SOLDERING: 260℃ FOR 5 SECONDS