
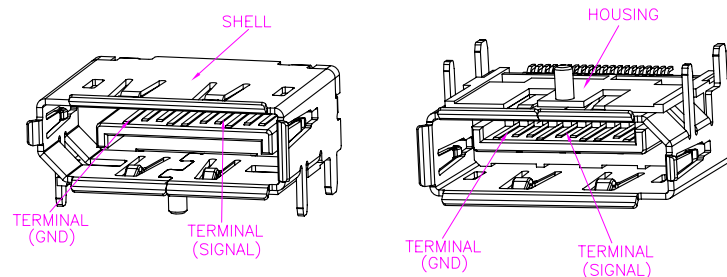


REV.	DESCRIPTION	DATE
A	RELEASE	Nov. 26, 2007
B	DRAW MODIFY	Feb. 14, 2008
C	DIM. MODIFY	Jun. 13, 2008



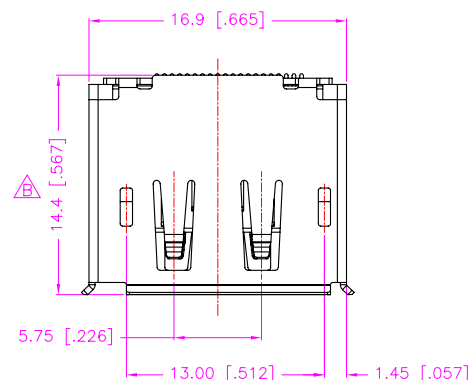


MATERIALS

1. HOUSING : L.C.P. (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING.
3. SHELL : PHOSPHOR BRONZE, NICKEL PLATING.



SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.
6. DURABILITY : 10000 CYCLES.
7. MATING FORCE : 4.5kgf MAX.
8. UNMATING FORCE : 1.0kgf MIN.

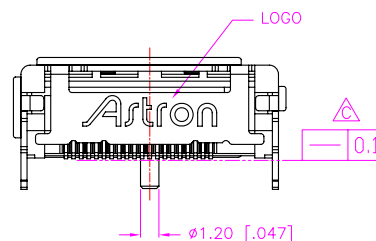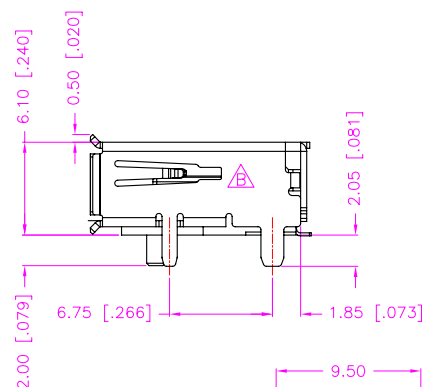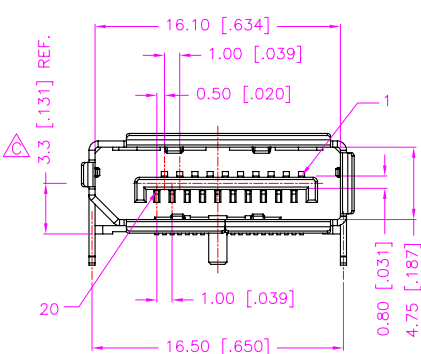

PART NUMBER INFORMATION







68 - 01		02	-	20	-	H
SERIES CODE	TYPE 02			NUMBER OF POSITION		ENVIRONMENTAL PROTECTION CODE (HALOGEN FREE)

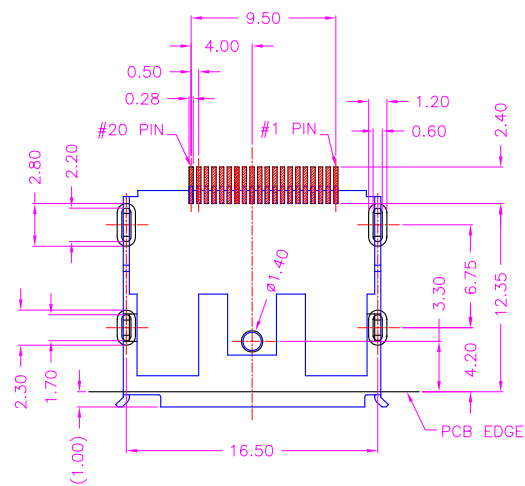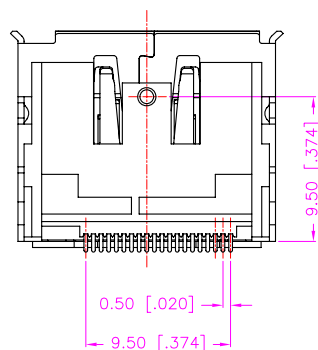

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER JANPE	NAME Astron WWW.ASTRON.COM.TW
UNITS : mm [inch]		CHECK BEN	
SCALE NONE		APP'D ERPE	DRAW NO. C68-0102-20-H
SIZE A4		PRODUCT SPEC. T-836	
SHEET 1 OF 2		REV. C	08005

REV.	DESCRIPTION	DATE
A	RELEASE	Nov. 26, 2007
B	DRAW. MODIFY	Feb. 14, 2008
B	DIM. MODIFY	Jun. 13, 2008

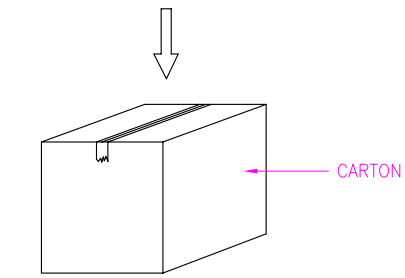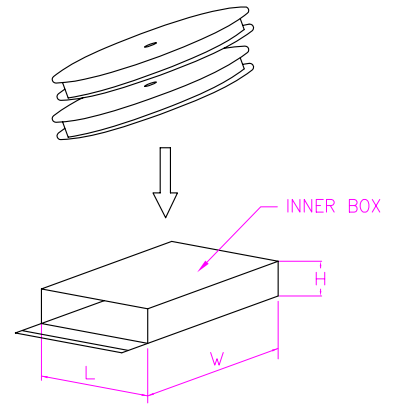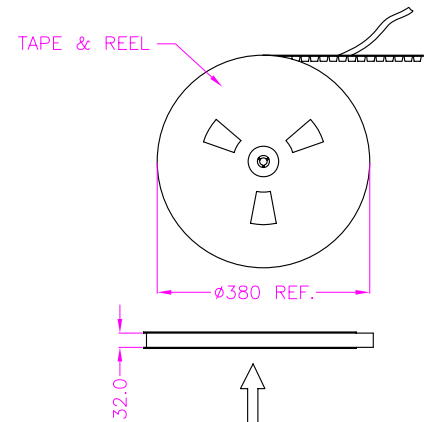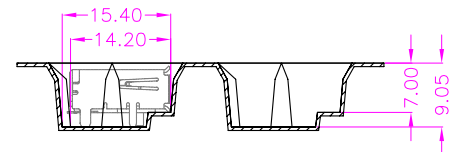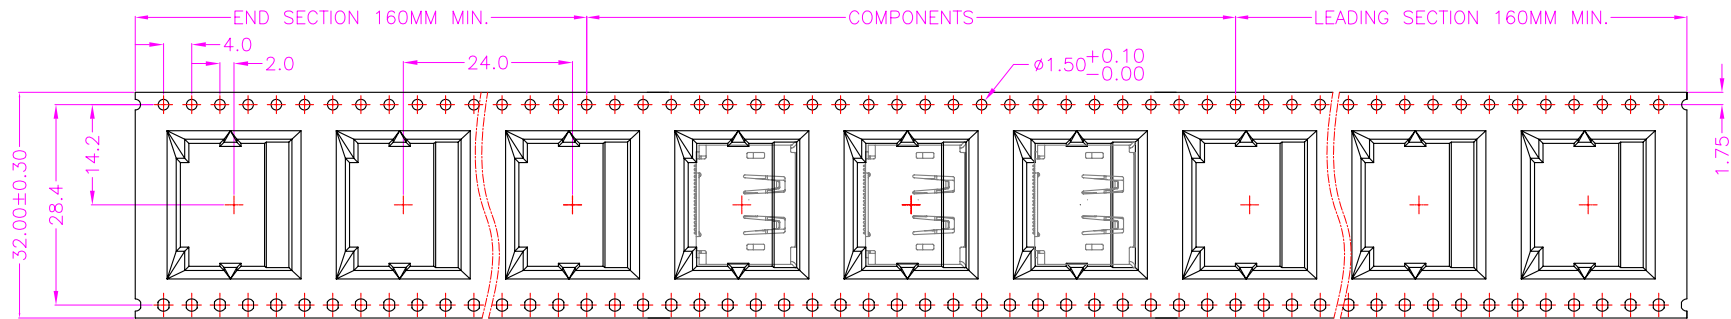

TAPE & PACKAGE :

MATERIAL :

1. CARRIER TAPE : PS
2. COVER TAPE: PE
3. REEL : PS

QUANTITY:

1. 300 PCS PER REEL
2. 600 PCS REEL PER INNER BOX
3. 3000 PCS INNER BOX PER CARTON

DIMENSION :

REEL SIZE : DIA=380.0mm, W=32.0mm
INNER BOX : L=390mm, W=381mm H=86mm
CARTON : L=420mm, W=400mm, H=460mm

TOLERANCE .0=±.10 [.004] .00=±.15 [.006] .000=±.XXX .0000=±. ANG.=±3°	DRAWER	JANICE	Astron WWW.ASTRON.COM.TW NAME DISPLAY PORT RIGHT ANGLE, SMT TYPE, FEMALE DRAW NO. C68-0102-20-H
	CHECK	BEN	
	APP'D	ERP	
	PRODUCT SPEC.	—	
	UNITS : mm [inch]	T-836	DRAW NO. C68-0102-20-H
SCALE NONE	SIZE A4	SHEET 2 OF 2	
		REV. C	08005