


Three Terminal Positive Voltage Regulator

78M05

■ Features

- Maximum Output Current I_o : 500mA
- Output Voltage V_o : 5V
- Continuous Total Dissipation PD: 1.25 W ($T_a = 25\text{ }^{\circ}\text{C}$)

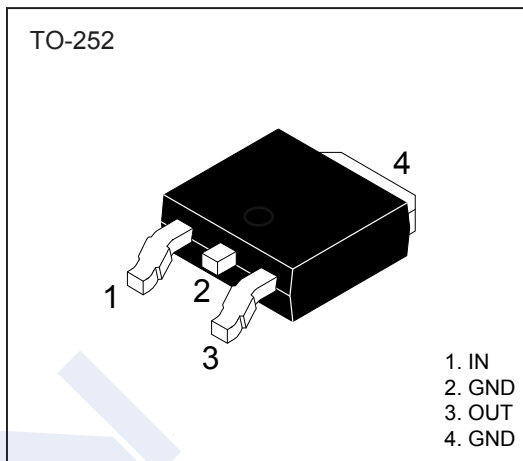

■ Absolute Maximum Ratings Over Operating Temperature Range(unless otherwise noted)

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	35	V
Maximum Output Current	I_o	0.5	A
Thermal Resistance, Junction-to-Ambient	R_{thJA}	80	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	T_{opr}	-25 to 125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-65 to 150	

Three Terminal Positive Voltage Regulator

78M05


Electrical Characteristics at Specified Virtual Junction Temperature

($V_i=10V$, $I_o=350mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$25^{\circ}C$	4.8	5	5.2	V
		$7V \leq V_i \leq 20V$, $I_o = 5.0mA \sim 350mA$	-25 to 125 $^{\circ}C$	4.75	5	
Load Regulation	ΔV_o	$I_o = 5.0mA \sim 500mA$	$25^{\circ}C$		100	mV
		$I_o = 5.0mA \sim 200mA$	$25^{\circ}C$		50	
Line Regulation	ΔV_o	$7V \leq V_i \leq 25V$, $I_o = 200mA$	$25^{\circ}C$		100	
		$8V \leq V_i \leq 25V$, $I_o = 200mA$	$25^{\circ}C$		50	
Quiescent Current	I_q	$25^{\circ}C$			6	mA
Quiescent Current Change	ΔI_q	$8V \leq V_i \leq 25V$, $I_o = 200mA$	-25 to 125 $^{\circ}C$		0.8	
		$5mA \leq I_o \leq 350mA$	-25 to 125 $^{\circ}C$		0.5	
Output Noise Voltage	V_N	$10Hz \leq F \leq 100kHz$	$25^{\circ}C$		200	$\mu V/V_o$
Ripple Rejection	RR	$8V \leq V_i \leq 18V$, $F=120Hz$, $I_o=300mA$	-25 to 125 $^{\circ}C$	62		dB
Dropout Voltage	V_d	$I_o=350mA$	$25^{\circ}C$		2.5	V
Short Circuit Current Limit	I_{sc}	$V_i=10V$	$25^{\circ}C$		300	mA
Peak Current	I_{pk}	$25^{\circ}C$		0.5		A

* Pulse test.

Typical Application

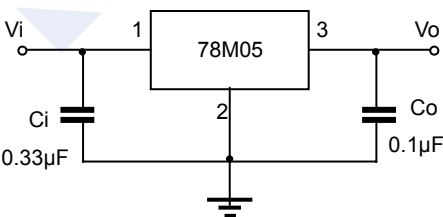

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.







Marking

Marking	78M05 *****
---------	----------------

Three Terminal Positive Voltage Regulator


78M05

Typical Characteristics

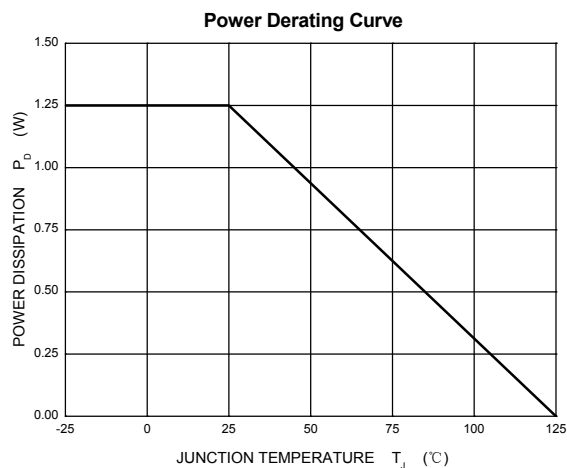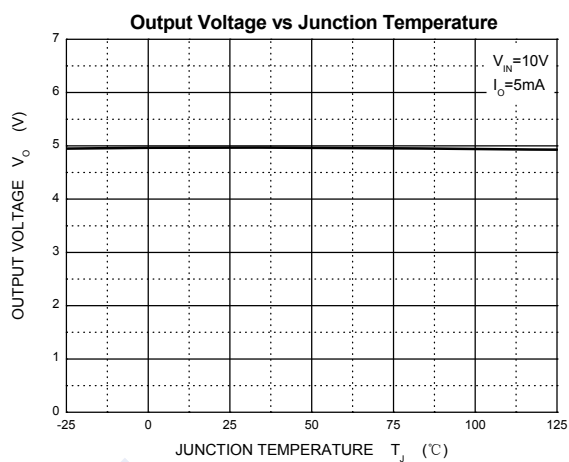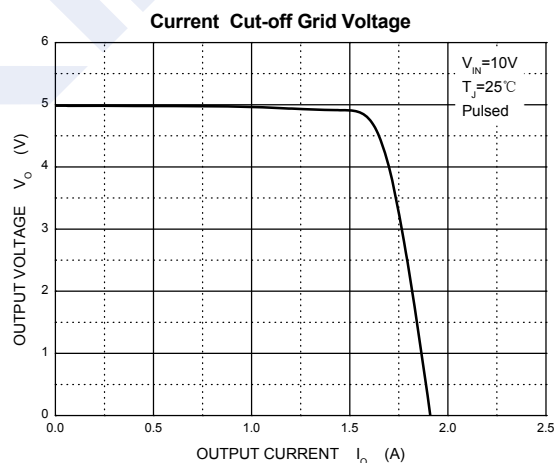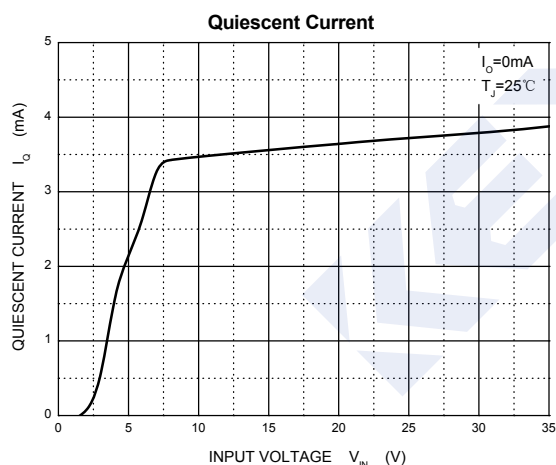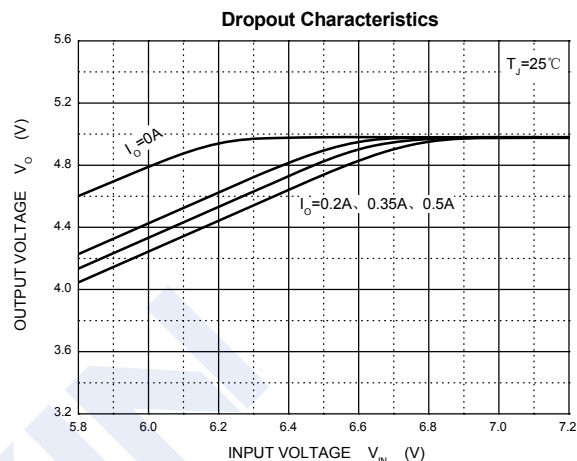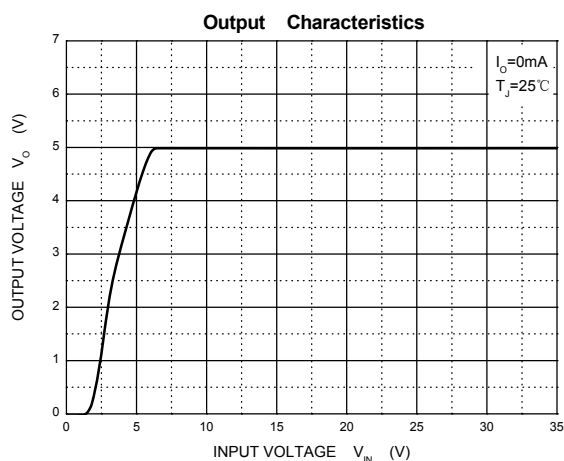

Three Terminal Positive Voltage Regulator 78M05

■ Package Outline Dimensions

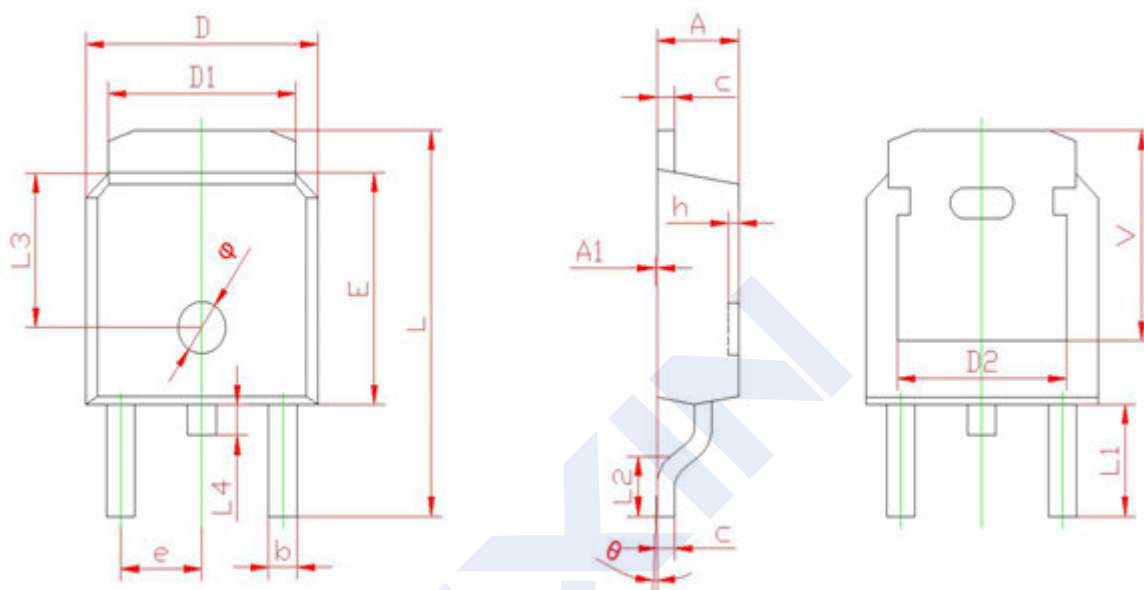

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.960	0.026	0.038
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.800 REF		0.189 REF	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 REF		0.114 REF	
L2	1.400	1.700	0.055	0.067
L3	4.00 REF		0.157 REF	
L4	0.600	1.000	0.024	0.039
φ	1.200	1.400	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.500 REF		0.217 REF	