




OTHER SPECIFICATIONS:

(1) POLARIZER:
(2) VIEWING DIRECTION: $\pm 60^\circ$
(3) CONNECTION: DIL PIN
PIN LENGTH:
(4) OPERATING VOLTAGE: 5.0V
(5) DRIVING SCHEME: TRIPLEX
V(on): 3.2V V(off): 1.7V
(6) TEMPERATURE RANGE:
L.C. STATE RANGE: 0°C TO 50°C
STORAGE:
(7) NOTES:

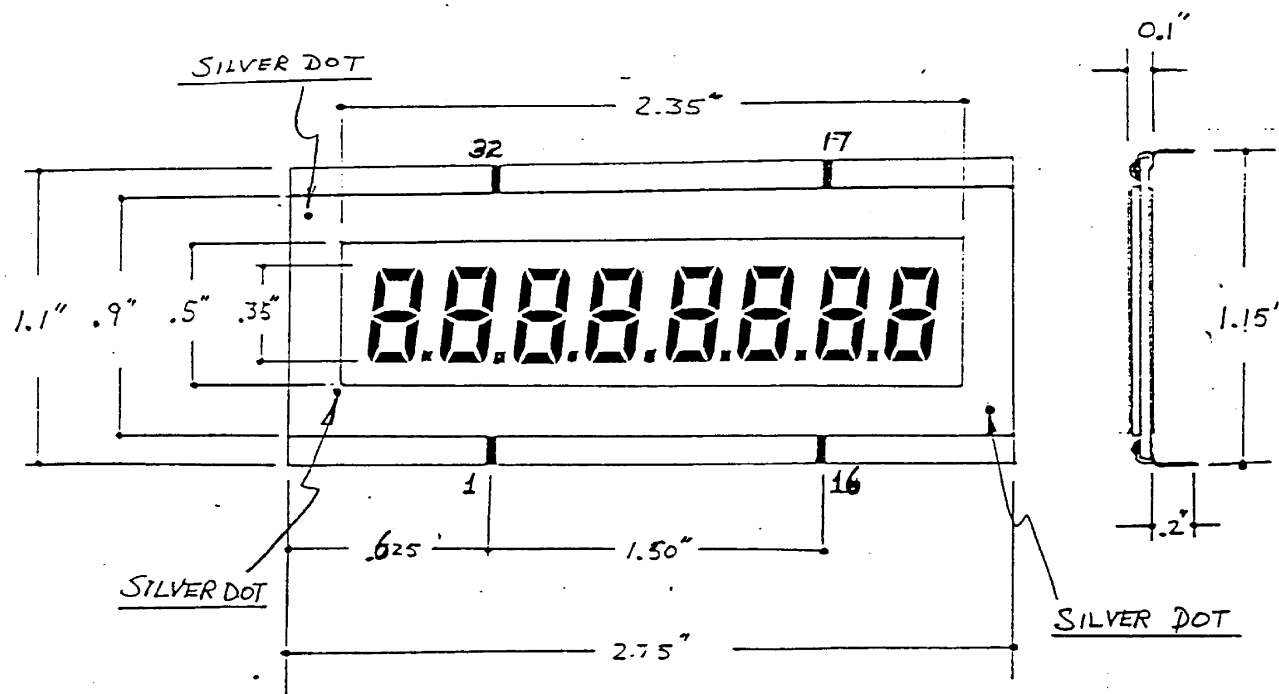


EXCEL TECHNOLOGY INT'L CORP.


4 Stryker Lane Ste 5, Hillsborough, NJ 08844
 TEL: (908) 874-4747 FAX: (908) 874-3278
 Email: excelix@lcdexceltech.com www.lcdexceltech.com

MODEL NO.	UNIT	SCALE	DATE
8300M3	in		04/02/84

Pin Connection 8300M3

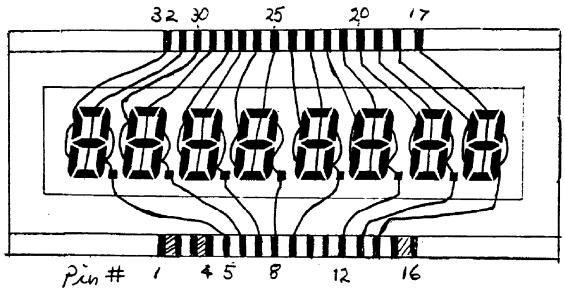

SEGMENT

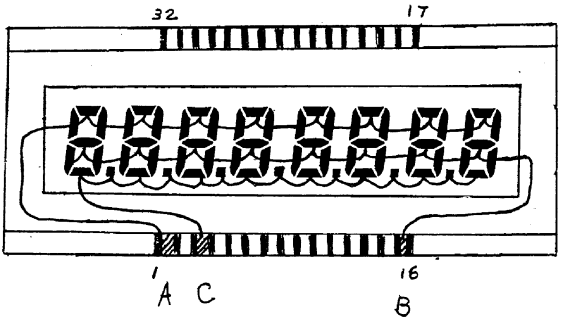

BACK PLANE



EXCEL TECHNOLOGY INT'L CORP.

4 Stryker Lane Ste 5, Hillsborough, NJ 08844

TEL: (908) 874-4747 FAX: (908) 874-3278

Email: excelix@lcdexceltech.com www.lcdexceltech.com

MODEL NO.	UNIT	SCALE	DATE
8300M3	in		01/02/84