



ADL-63302TL



TECHNICAL DATA



Red Laser Diode

Features

- AlGaAs laser diode
- Peak Wavelength: 638 nm
- Single Transverse/Longitudinal Mode
- Optical Output Power: 30 mW
- Package: 5.6 mm, with Photo Diode



Electrical Connection

Pin Configuration	Bottom View								
 m-type <table border="1"> <thead> <tr> <th>PIN</th><th>Function</th></tr> </thead> <tbody> <tr> <td>1</td><td>LD Cathode</td></tr> <tr> <td>2</td><td>LD Anode, PD Cathode</td></tr> <tr> <td>3</td><td>PD Anode</td></tr> </tbody> </table>	PIN	Function	1	LD Cathode	2	LD Anode, PD Cathode	3	PD Anode	
PIN	Function								
1	LD Cathode								
2	LD Anode, PD Cathode								
3	PD Anode								

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$)

Item	Symbol	Value	Unit
Optical Output Power	P_O	32	mW
LD Reverse Voltage	V_R (LD)	2	V
PD Reverse Voltage	V_R (PD)	30	V
PD Forward Current	I_{PD}	10	mA
Operating Case Temperature	T_C	-10 ... +50	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ... +85	$^\circ\text{C}$







Specifications ($T_C=25^\circ\text{C}$, $P_O=30\text{mW}$)

Item		Symbol	Min.	Typ.	Max.	Unit
Optical Specifications						
Optical Output Power (CW)		P _O	-	30	-	mW
Peak Wavelength		λ _P	630	638	645	nm
FWHM Beam Divergence		Θ	5	8	12	deg
		Θ _⊥	27	32	37	deg
Emission Point Accuracy	Angle	Δθ	-3	-	+3	deg
		Δθ _⊥	-3	-	+3	deg
Astigmatism		A _S	-80	-	+80	μm
Electrical Specifications						
Threshold Current		I _{th}	-	60	80	mA
Operating Current		I _{op}	-	115	140	mA
Slope Efficiency		η	0.3	0.6	0.9	W/A
Operating Voltage		V _{op}	-	2.2	2.7	V
Monitor Current		I _m	0.05	0.1	0.5	mA

The above specifications are for reference purpose only and subjected to change without prior notice.



Typical Performance Characteristics

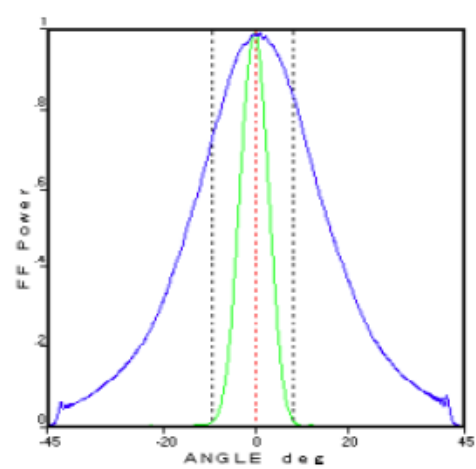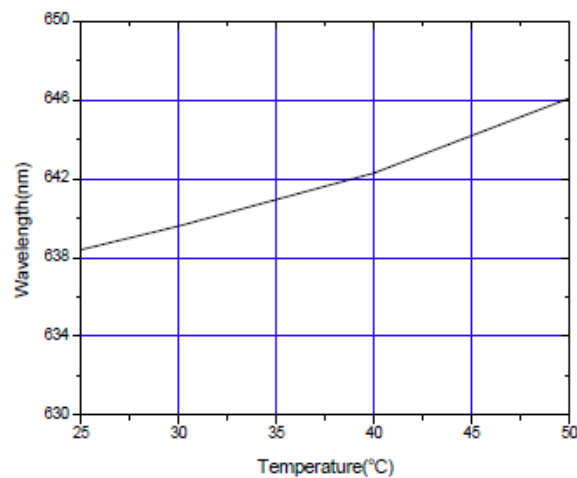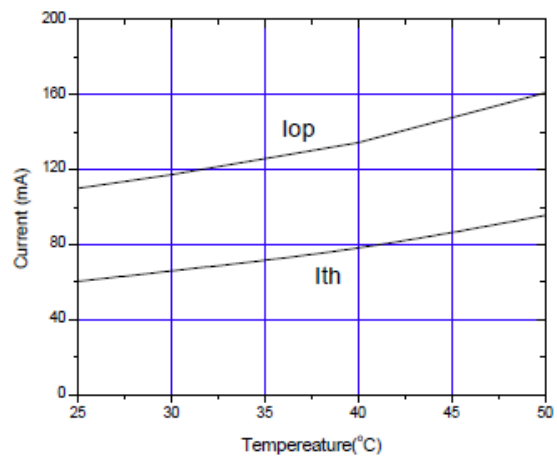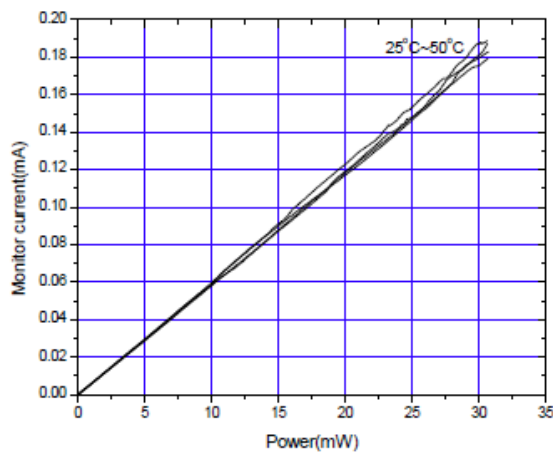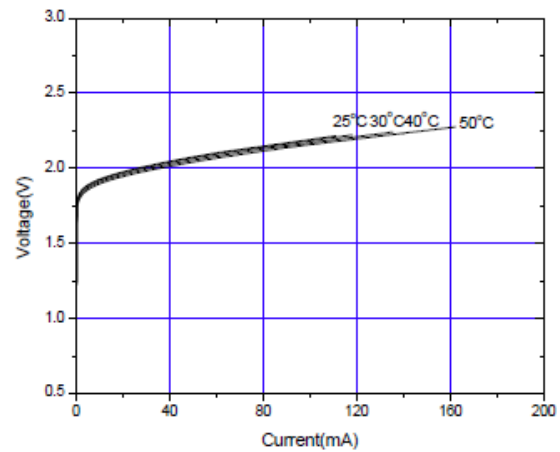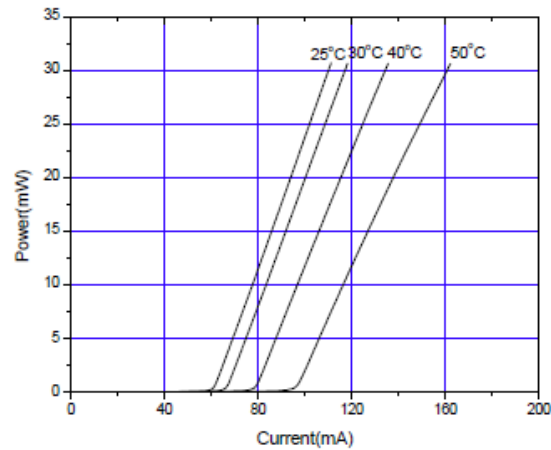


NOTE
LASERDIODE
MUST BE COOLED



Package Dimensions

5.6 mm TO (all dimensions in mm)

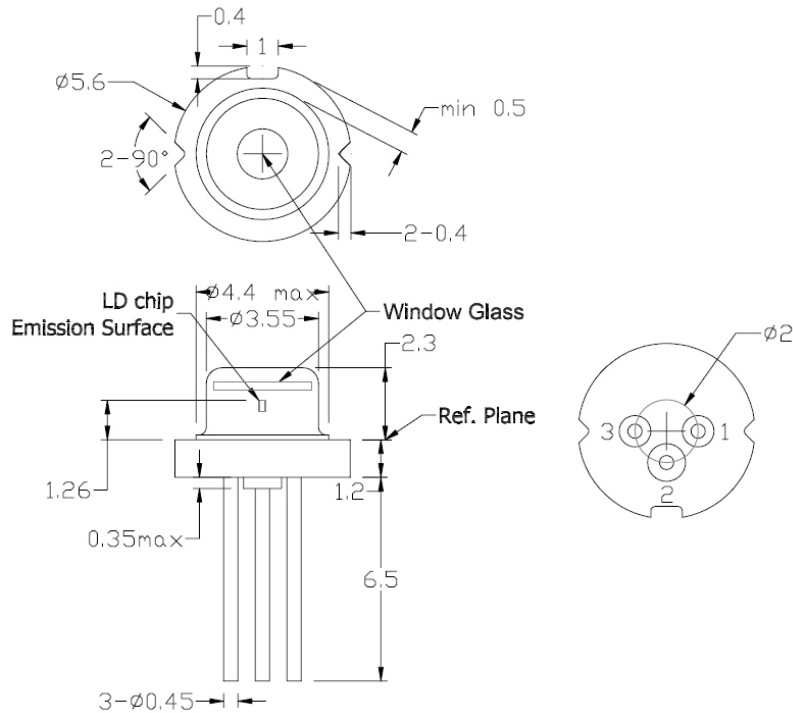

Safety of Laser light

- Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



Cautions

1. Operating methode

- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by switching on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

- Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handling the product.

3. Absolute Maximum Rating

- Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated stricly below absolute maximum rating.