



Dual-Channel Isolators with Integrated DC/DC Converter, 50 mW

Preliminary Technical Data

ADuM5240/ADuM5241/ADuM5242

FEATURES

Integrated isolated DC/DC converter
Regulated 5V/10 mA output
Dual dc-to-10 Mbps (NRZ) signal isolation channels
Narrow body SOIC 8-lead package
High temperature operation: 105°C
Precise timing characteristics:
 3 ns maximum pulse-width distortion
 3 ns maximum channel-to-channel matching
 70 ns maximum propagation delay
High common-mode transient immunity: > 25 kV/μs
Safety and regulatory approvals (pending)
 UL recognition
 2500 V rms for 1 minute per UL 1577
 CSA component acceptance notice #5A
 VDE certificate of conformity
 DIN EN 60747-5-2 (VDE 0884 Part 2): 2003-01
 DIN EN 60950 (VDE 0805): 2001-12; DIN EN 60950: 2000
 $V_{IORM} = 425$ V peak

GENERAL DESCRIPTION

The ADuM524x¹ are dual-channel digital isolators having an integrated DC/DC converter. Based on Analog Devices' *iCoupler*® technology, the DC/DC converter provides up to 50 mW of regulated, isolated power at +5V. This eliminates the need for a separate isolated DC/DC converter in low-power isolated designs. Analog Devices' chip-scale transformer *iCoupler* technology is used both for the isolation of the logic signals as well as for the DC/DC converter. The result is a small form-factor total-isolation solution.

ADuM524x units may be used in combination or with other *iCoupler* products to achieve greater channel counts.

The ADuM524x isolators provide two independent isolation channels in a variety of channel configurations and data rates (see Ordering Guide) operating off a 5V input supply.

¹ Protected by U.S. Patents 5,952,849 6,873,065 and 7,075,329 Other patents pending.

FUNCTIONAL BLOCK DIAGRAM

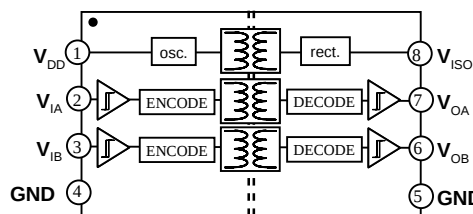


Figure 1. ADuM5240 Functional Block Diagram

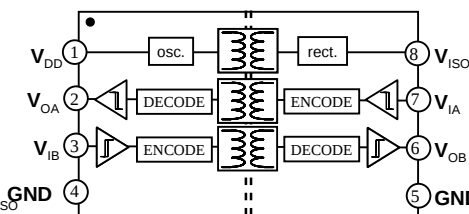


Figure 2. ADuM5241 Functional Block Diagram

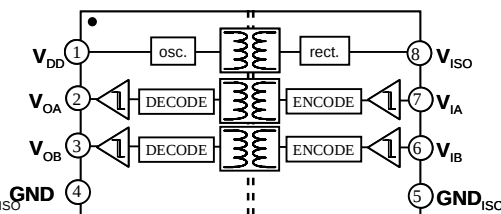


Figure 3. ADuM5242 Functional Block Diagram

Rev. PrN

November 17, 2006

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781.329.4700
 Fax: 781.326.8703

www.analog.com

© 2006 Analog Devices, Inc. All rights reserved.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS¹

All voltages are relative to their respective ground. All min/max specifications apply over the entire recommended operating range, unless otherwise noted. All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.0\text{ V}$, $V_{ISO} = 5.0\text{ V}$.

Table 1.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
With DC/DC Converter Enabled:						
DC to 2 Mbps Data Rate:						Logic signal freq. $\leq 1\text{ MHz}$
Setpoint	V_{ISO}	5.0		5.5	V	
Maximum Output Current	$I_{ISO(max)}$	10			mA	
Input Supply Current ²						
At Maximum Output Current	$I_{DD(max)}$			125	mA	$I_{ISO} = 10\text{ mA}$, Logic signal freq. $\leq 1\text{ MHz}$
With No Output Current	$I_{DD(0)}$			95	mA	$I_{ISO} = 0$
10 Mbps Data Rate:						Logic signal freq. = 5 MHz
Setpoint	V_{ISO}	4.5		5.5	V	
Maximum Output Current	$I_{ISO(max, 10)}$					
ADuM5240		8.5			mA	
ADuM5241		7.0			mA	
ADuM5242		5.7			mA	
Input Supply Current ³						
At Maximum Output Current	$I_{DD(max)}$			125	mA	$I_{ISO(max, 10)}$, Logic signal freq. = 5 MHz
With No Output Current	$I_{DD(0)}$			100	mA	$I_{ISO} = 0$, Logic signal freq. = 5 MHz
With DC/DC Converter Disabled:						
DC to 2 Mbps	$I_{DD(2)}$					Logic signal freq. $\leq 1\text{ MHz}$
Input Supply Current, V_{DD} ²						
ADuM5240				3.3	mA	
ADuM5241				2.7	mA	
ADuM5242				2.2	mA	
Input Supply Current, V_{ISO} ²						
ADuM5240				1.6	mA	
ADuM5241				3.1	mA	
ADuM5242				2.5	mA	
10 Mbps	$I_{DD(10)}$					$I_{ISO} = 0$, Logic signal freq. $\leq 5\text{ MHz}$
Input Supply Current, V_{DD} ²						
ADuM5240				6.1	mA	
ADuM5241				5.0	mA	
ADuM5242				4.0	mA	
Input Supply Current, V_{ISO} ²						
ADuM5240				3.8	mA	
ADuM5241				5.0	mA	
ADuM5242				6.2	mA	
Enable Threshold ⁴	V_{ENABLE}			4.5	V	
Disable Threshold ⁴	$V_{DISABLE}$	4.0		4.5	V	
Input Currents	I_{IA}, I_{IB}	-10	+0.01	+10	μA	
Logic High Input Threshold	V_{IH}			$0.7 V_{ISO}$	V	
Logic Low Input Threshold	V_{IL}	$0.3 V_{ISO}$			V	
Logic High Output Voltages	V_{OAH}, V_{OBH}	$V_{DD} - 0.1$	5.0		V	$I_{OX} = -20\text{ }\mu\text{A}$, $V_{IX} = V_{IXH}$
		$V_{DD} - 0.5$	4.8		V	$I_{OX} = -4\text{ mA}$, $V_{IX} = V_{IXH}$
Logic Low Output Voltages	V_{OAL}, V_{OBL}		0.0	0.1	V	$I_{OX} = 20\text{ }\mu\text{A}$, $V_{IX} = V_{IXL}$
			0.0	0.4	V	$I_{OX} = 4\text{ mA}$, $V_{IX} = V_{IXL}$

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
AC SPECIFICATIONS						
Minimum Pulse Width ⁵	PW			100	ns	C _L = 15 pF, CMOS signal levels
Maximum Data Rate ⁶		10			Mbps	C _L = 15 pF, CMOS signal levels
Propagation Delay ⁷	t _{PHL} , t _{PLH}	25		70	ns	C _L = 15 pF, CMOS signal levels
Pulse-Width Distortion, t _{PLH} – t _{PHL} ⁷	PWD			3	ns	C _L = 15 pF, CMOS signal levels
Propagation Delay Skew ⁸	t _{PSK}			45	ns	C _L = 15 pF, CMOS signal levels
Channel-to-Channel Matching, Codirectional Channels ⁹	t _{PSKCD}			3	ns	C _L = 15 pF, CMOS signal levels
Channel-to-Channel Matching, Opposing-Directional Channels ¹⁰	t _{PSKCD}			15	ns	C _L = 15 pF, CMOS signal levels
Ripple ¹¹			200		mV _{P-P}	
Enable Time ¹²	T _{ENABLE}		50		ns	
Disable Time ¹²	T _{DISABLE}		50		ns	
Output Rise/Fall Time (10% to 90%)	t _R /t _F		2.5		ns	C _L = 15 pF, CMOS signal levels
Common-Mode Transient Immunity at Logic High Output	CM _H	25	35		kV/μs	V _{ix} = V _{DD} , V _{ISO} , V _{CM} = 1000 V, transient magnitude = 800 V
Common-Mode Transient Immunity at Logic Low Output	CM _L	25	35		kV/μs	V _{ix} = 0 V, V = 1000 V, transient magnitude = 800 V
Refresh Frequency	f _r		1.0		MHz	

¹ All voltages are relative to their respective ground.

² Supply current values are specified with no load present on the digital outputs.

³ Supply current values are specified with no load present on the digital outputs.

⁴ Enable/disable threshold is the voltage at which the internal DC/DC converter is enabled/disabled.

⁵ The minimum pulse width is the shortest pulse width at which the specified pulse-width distortion is guaranteed.

⁶ The maximum data rate is the fastest data rate at which the specified pulse-width distortion is guaranteed.

⁷ t_{PHL} propagation delay is measured from the 50% level of the falling edge of the V_{ix} signal to the 50% level of the falling edge of the V_{ox} signal. t_{PLH} propagation delay is measured from the 50% level of the rising edge of the V_{ix} signal to the 50% level of the rising edge of the V_{ox} signal.

⁸ t_{PSK} is the magnitude of the worst-case difference in t_{PHL} and/or t_{PLH} that is measured between units at the same operating temperature, supply voltages, and output load within the recommended operating conditions.

⁹ Channel-to-channel matching is the absolute value of the difference in propagation delays between the two channels when operated with identical loads.

¹⁰ Channel-to-channel matching is the absolute value of the difference in propagation delays between the two channels when operated with identical loads.

¹¹ Ripple occurs at frequency corresponding to the input signal data rate or the refresh frequency for data rates below 1Mbps.

¹² Enable time is the duration from when input supply voltage rises above the enable threshold to when the internal DC/DC converter starts charging an external load.

Disable time is the duration from when the input supply voltage drops below the disable threshold to when the internal DC/DC converter stops charging an external load.

PACKAGE CHARACTERISTICS

Table 2.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Resistance (Input-Output)	R _{I-O}		10 ¹²		Ω	f = 1 MHz
Capacitance (Input-Output)	C _{I-O}		1.0		pF	
Input Capacitance	C _I		4.0		pF	
IC Junction-to-Air Thermal Resistance	θ _{JA}		150		°C/W	

REGULATORY INFORMATION

The ADuM5240/5241/5242 will be approved by the following organizations upon product release:

Table 3.

UL (pending)	CSA (pending)	VDE (pending)
Recognized under 1577 Component Recognition Program ¹ Basic insulation, 2500 V rms isolation rating	Approved under CSA Component Acceptance Notice #5A Basic insulation per CSA 60950-1-03 and IEC 60950-1, 300 V rms (425 V peak) maximum working voltage	Certified according to DIN EN 60747-5-2 (VDE 0884 Part 2):2003-01 ² Basic insulation, 300 V rms (425 V peak) maximum working voltage
File E214100	File 205078	File 2471900-4880-0001

¹ In accordance with UL1577, each ADuM524x is proof-tested by applying an insulation test voltage ≥ 3000 V rms for 1 second (current leakage detection limit = 5 μ A).

² In accordance with DIN EN 60747-5-2, each ADuM524x is proof-tested by applying an insulation test voltage ≥ 1050 V peak for 1 second (partial discharge detection limit = 5 pC).

INSULATION AND SAFETY-RELATED SPECIFICATIONS**Table 4.**

Parameter	Symbol	Value	Unit	Conditions
Rated Dielectric Insulation Voltage		2500	V rms	1 minute duration
Minimum External Air Gap (Clearance)	L(I01)	4.90 min	mm	Measured from input terminals to output terminals, shortest distance through air
Minimum External Tracking (Creepage)	L(I02)	4.01 min	mm	Measured from input terminals to output terminals, shortest distance path along body
Minimum Internal Gap (Internal Clearance)		0.017 min	mm	Insulation distance through insulation
Tracking Resistance (Comparative Tracking Index)	CTI	>175	V	DIN IEC 112/VDE 0303 Part 1
Isolation Group		IIIa		Material Group (DIN VDE 0110, 1/89, Table 1)

DIN EN 60747-5-2 (VDE 0884 PART 2) INSULATION CHARACTERISTICS**Table 5.**

Description	Symbol	Characteristic	Unit
Installation Classification per DIN VDE 0110		I–IV	
For Rated Mains Voltage ≤ 150 V rms		I–III	
For Rated Mains Voltage ≤ 300 V rms		40/105/21	
Climatic Classification		2	
Pollution Degree (DIN VDE 0110, Table 1)			
Maximum Working Insulation Voltage	V_{IORM}	425	V peak
Input to Output Test Voltage, Method b1	V_{PR}	797	V peak
$V_{IORM} \times 1.875 = V_{PR}$, 100% Production Test, $t_m = 1$ sec, Partial Discharge < 5 pC			
Input to Output Test Voltage, Method a	V_{PR}		
After Environmental Tests Subgroup 1		680	V peak
$V_{IORM} \times 1.6 = V_{PR}$, $t_m = 60$ sec, Partial Discharge < 5 pC			
After Input and/or Safety Test Subgroup 2/3		510	V peak
$V_{IORM} \times 1.2 = V_{PR}$, $t_m = 60$ sec, Partial Discharge < 5 pC		4000	V peak
Highest Allowable Overvoltage (Transient Overvoltage, $t_{TR} = 10$ sec)	V_{TR}		
Safety-Limiting Values (maximum value allowed in the event of a failure; also see the thermal derating curve, Figure 4)			
Case Temperature	T_S	150	°C
Side 1 Current	I_{S1}	160	mA
Side 2 Current	I_{S2}	170	mA
Insulation Resistance at T_S , $V_{IO} = 500$ V	R_S	$> 10^9$	Ω

Note that the “*” marking on the package denotes DIN EN 60747-5-2 approval for a 425 V peak working voltage.

This isolator is suitable for basic isolation only within the safety limit data. Maintenance of the safety data is ensured by protective circuits.

[Figure to be added]

Figure 4. Thermal Derating Curve, Dependence of Safety Limiting Values on Case Temperature, per DIN EN 60747-5-2

RECOMMENDED OPERATING CONDITIONS**Table 6.**

Parameter	Symbol	Min	Max	Unit
Operating Temperature	T_A	–40	+105	°C
Supply Voltages ¹				
V_{DD} , DC/DC Conv. Enabled	V_{DD}	4.5	5.5	V
V_{DD} , DC/DC Conv. Disabled	V_{DD}	2.7	4.0	V
V_{ISO} , DC/DC Conv. Disabled	V_{ISO}	2.7	5.5	V
Input Signal Rise and Fall Times			1.0	ms
Input Supply Slew Rate			10	V/ms

¹ All voltages are relative to their respective ground.

ABSOLUTE MAXIMUM RATINGS

Ambient temperature = 25°C, unless otherwise noted.

Table 7.

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T_{ST}	−55	150	°C
Ambient Operating Temperature	T_A	−40	105	°C
Supply Voltages ¹	V_{DD}, V_{ISO}	−0.5	7.0	V
Input Voltage ¹	V_{IA}, V_{IB}	−0.5	$V_{DD/ISO} + 0.5$	V
Output Voltage ¹	V_{OA}, V_{OB}	−0.5	$V_{DD/ISO} + 0.5$	V
Average Output Current, per Pin ²	I_O			mA
Common-Mode Transients ³		−100	+100	kV/μs

¹ All voltages are relative to their respective ground.

² See Figure 4 for maximum rated current values for various temperatures.

³ Refers to common-mode transients across the insulation barrier. Common-mode transients exceeding the Absolute Maximum Rating may cause latch-up or permanent damage.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; Functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



Table 8. Truth Table, ADuM5240

V_{DD} State	DC/DC Converter	V_{ISO} State	V_{IA} Input	V_{IB} Input	V_{OA} Output	V_{OB} Output
Powered	Enabled	Powered (Internally)	H	H	H	H
Powered	Enabled	Powered (Internally)	L	L	L	L
Powered	Enabled	Powered (Internally)	H	L	H	L
Powered	Enabled	Powered (Internally)	L	H	L	H
Powered	Disabled	Powered (Externally)	H	H	H	H
Powered	Disabled	Powered (Externally)	L	L	L	L
Powered	Disabled	Powered (Externally)	H	L	H	L
Powered	Disabled	Powered (Externally)	L	H	L	H
Powered	Disabled	Unpowered	X	X	Z	Z
Unpowered	Disabled	Powered (Externally)	X	X	L	L
Unpowered	Disabled	Unpowered	X	X	Z	Z

Table 9. Truth Table, ADuM5241

V _{DD} State	DC/DC Converter	V _{ISO} State	V _{IA} Input	V _{IB} Input	V _{OA} Output	V _{OB} Output
Powered	Enabled	Powered (Internally)	H	H	H	H
Powered	Enabled	Powered (Internally)	L	L	L	L
Powered	Enabled	Powered (Internally)	H	L	H	L
Powered	Enabled	Powered (Internally)	L	H	L	H
Powered	Disabled	Powered (Externally)	H	H	H	H
Powered	Disabled	Powered (Externally)	L	L	L	L
Powered	Disabled	Powered (Externally)	H	L	H	L
Powered	Disabled	Powered (Externally)	L	H	L	H
Powered	Disabled	Unpowered	X	X	L	Z
Unpowered	Disabled	Powered (Externally)	X	X	Z	L
Unpowered	Disabled	Unpowered	X	X	Z	Z

Table 10. Truth Table, ADuM5242

V _{DD} State	DC/DC Converter	V _{ISO} State	V _{IA} Input	V _{IB} Input	V _{OA} Output	V _{OB} Output
Powered	Enabled	Powered (Internally)	H	H	H	H
Powered	Enabled	Powered (Internally)	L	L	L	L
Powered	Enabled	Powered (Internally)	H	L	H	L
Powered	Enabled	Powered (Internally)	L	H	L	H
Powered	Disabled	Powered (Externally)	H	H	H	H
Powered	Disabled	Powered (Externally)	L	L	L	L
Powered	Disabled	Powered (Externally)	H	L	H	L
Powered	Disabled	Powered (Externally)	L	H	L	H
Powered	Disabled	Unpowered	X	X	L	L
Unpowered	Disabled	Powered (Externally)	X	X	Z	Z
Unpowered	Disabled	Unpowered	X	X	Z	Z

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




Figure 5. ADuM5240 Pin Configuration




Figure 6. ADuM5241 Pin Configuration




Figure 7. ADuM5242 Pin Configuration

Table 11. ADuM5240 Pin Function Descriptions

Pin No.	Mnemonic	Function
1	V _{DD1}	Supply Voltage for Isolator Side 1, 4.5 V to 5.5 V (DC/DC Enabled), 2.7 V to 4.0 V (DC/DC Disabled)
2	V _{IA}	Logic Input A.
3	V _{IB}	Logic Input B.
4	GND	Ground. Ground reference for Isolator Side 1.
5	GND _{ISO}	Isolated Ground. Ground reference for Isolator Side 2.
6	V _{OB}	Logic Output B.
7	V _{OA}	Logic Output A.
8	V _{ISO}	Isolated Supply Voltage for Isolator Side 2, 5.0 V to 5.5 V Output (DC/DC Enabled), 4.5 V to 5.5 V Input (DC/DC Disabled)

Table 13. ADuM5242 Pin Function Descriptions

Pin No.	Mnemonic	Function
1	V _{DD1}	Supply Voltage for Isolator Side 1, 4.5 V to 5.5 V (DC/DC Enabled), 2.7 V to 4.0 V (DC/DC Disabled)
2	V _{OA}	Logic Output A.
3	V _{OB}	Logic Output B.
4	GND	Ground. Ground reference for Isolator Side 1.
5	GND _{ISO}	Isolated Ground. Ground reference for Isolator Side 2.
6	V _{IB}	Logic Input B.
7	V _{IA}	Logic Input A.
8	V _{ISO}	Isolated Supply Voltage for Isolator Side 2, 5.0 V to 5.5 V Output (DC/DC Enabled), 4.5 V to 5.5 V Input (DC/DC Disabled)

Table 12. ADuM5241 Pin Function Descriptions

Pin No.	Mnemonic	Function
1	V _{DD1}	Supply Voltage for Isolator Side 1, 4.5 V to 5.5 V (DC/DC Enabled), 2.7 V to 4.0 V (DC/DC Disabled)
2	V _{OA}	Logic Output A.
3	V _{IB}	Logic Input B.
4	GND	Ground. Ground reference for Isolator Side 1.
5	GND _{ISO}	Isolated Ground. Ground reference for Isolator Side 2.
6	V _{OB}	Logic Output B.
7	V _{IA}	Logic Input A.
8	V _{ISO}	Isolated Supply Voltage for Isolator Side 2, 5.0 V to 5.5 V Output (DC/DC Enabled), 4.5 V to 5.5 V Input (DC/DC Disabled)

Figure 1 shows the dimensions of the BSC and the Seating Plane. The top drawing is a top-down view of the BSC, showing a rectangular component with four pins. The dimensions are: pin spacing (5.00 (0.1968) and 4.80 (0.1890)), pin width (0.25 (0.0098) and 0.10 (0.0040)), and overall size (6.20 (0.2440) and 5.80 (0.2284)). The bottom drawing is a side view of the component, showing a trapezoidal shape with a top width of 0.50 (0.0196), a bottom width of 0.25 (0.0099), and a height of 1.75 (0.0688). It also shows a seating plane with a height of 0.51 (0.0201) and a base width of 0.31 (0.0122). The dimensions are given in inches in parentheses.

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN

Dimensions shown in millimeters (inches)

Model	Number of Inputs, V _{DD1} Side	Number of Inputs, V _{DD2} Side	Maximum Data Rate (Mbps)	Temperature Range (°C)	Package Option ¹
ADuM5240BRZ ^{2,3}	2	0	10	−40 to +105	R-8
ADuM5241BRZ ^{2,3}	1	1	10	−40 to +105	R-8
ADuM5242BRZ ^{2,3}	0	2	10	−40 to +105	R-8

³ Z = Pb-free part.