

Product Features

- 10 ~ 4000MHz
- GaAs E-pHEMT
- 0.7dB Noise Figure
- 32dBm Output IP3
- 14dB Gain at 1900MHz
- 14dBm P1 dB
- SOT-143 Package
- Single Supply Voltage
- Pb Free / RoHS Standard

Application

- HF-Band, Cellular, CDMA, W-CDMA, Wimax Front-end Amplifier
- Low-Noise High Linearity Amplifier



Package Type: SOT-143

Description

AE608 is a Low-noise amplifier designed with GaAs E-pHEMT in a low cost SOT-143 package.

This E-pHEMT amplifier is designed as low-noise devices for infrastructure equipment in the 10~4000MHz Wireless technologies such as HF-Band, Cellular, GSM, PCS, CDMA, W-CDMA, Wibro, Bluetooth, Wimax.

Specifications

PARAMETER	Units	Min	Typ	Max
Frequency Range	MHz		10- 4000	
Gain (S_{21})	dB	12	14	
Input Return Loss (S_{11})	dB		-18	
Output Return Loss (S_{22})	dB		-10	
Output 3 rd Order Intercept Point (OIP3)	dBm	29	32	
Output 1dB compression Point (P_{1dB})	dBm	12	14	
Noise Figure	dB		0.7	0.9
DC Operating Current	mA	30	45	60
Operating Gate Voltage($V_{ds}=3V, I_{ds}=45mA$)	V		0.4	
Threshold voltage	V	0.1	0.25	0.4

Test Condition

① 1900MHz, $V_{dd}=+3V$, 50ohm System at 25℃







② OIP3 is measured with two tones, at an output power of +0dBm/tone separated by 1MHz.

Absolute Maximum Ratings

PARAMETER	Rating	Remark
Operating Case Temperature (℃)	-40 ~ 85	
Storage Temperature (℃)	-50 ~ 125	
Drain-Source Voltage	+7V	
Drain Current	120mA	
Gate-Source Voltage	-5V ~ 1V	
Channel Temperature	150℃	
RF Input Power	20dBm	







E-pHEMT**AE608****RFHIC****Frequency Range : 10~1000MHz****HF-Band, Cellular Performance Data ($V_d=2.5V$, $I_d=25mA$, $T_c=25^\circ C$)**




Items	Data	Remarks	Items	Data	Remarks
Gain	18 dB	500 MHz	NF	1.4 dB	10~1000 MHz
OIP3	23 dBm	500 MHz	P1dB	12 dBm	500 MHz

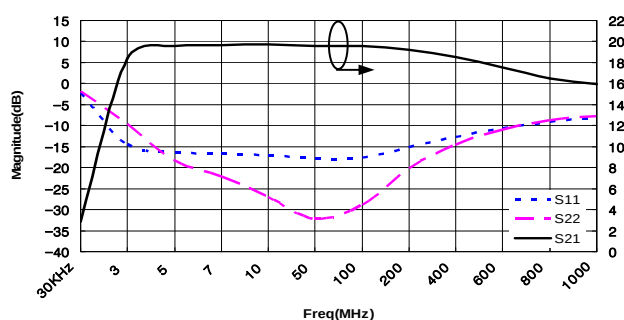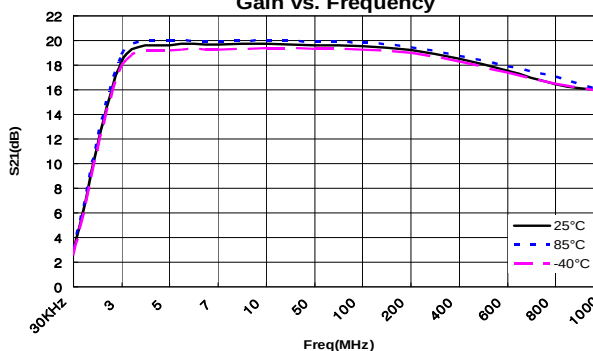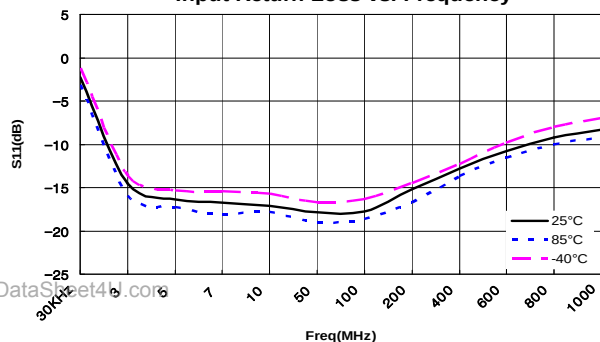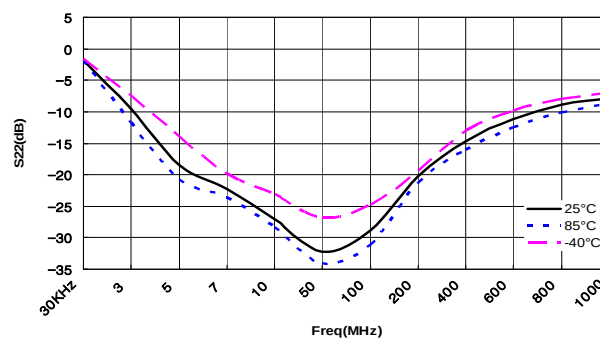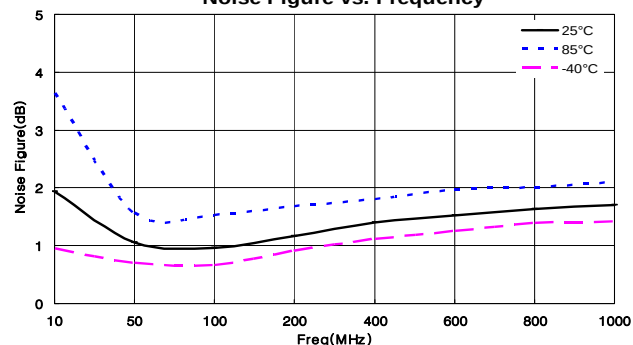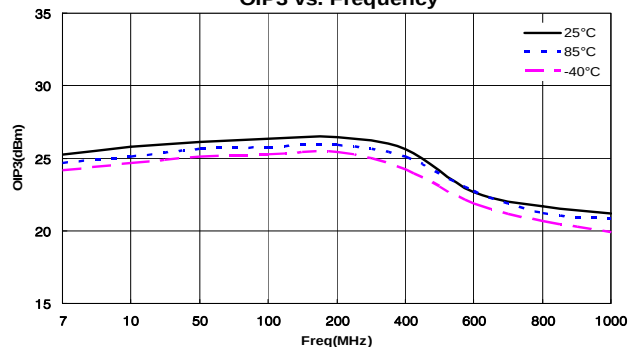S-Parameter vs. Frequency(25°C)**Gain vs. Frequency****Input Return Loss vs. Frequency****Output Return Loss vs. Frequency****Noise Figure vs. Frequency****OIP3 vs. Frequency**

E-pHEMT**AE608****RFHIC****Frequency Range : 1700~2200MHz****PCS, DCS, WCDMA Performance Data ($V_d=3V$, $I_d=45mA$, $T_c=25^\circ C$)**

Items	Data	Remarks	Items	Data	Remarks
Gain	13.9 dB	1940 MHz	NF	0.7 dB	1700~2200 MHz
OIP3	32.5 dBm	1700~2200 MHz	P1dB	14 dBm	1700~2200 MHz

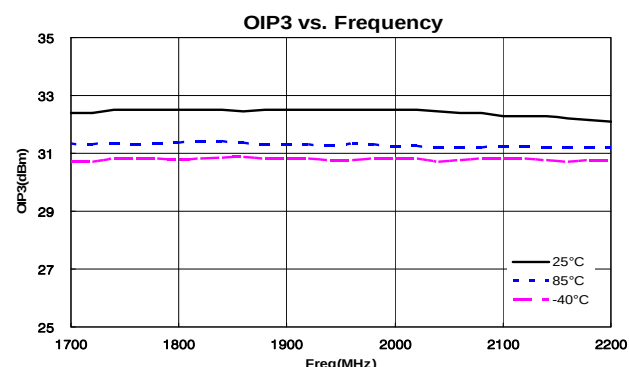
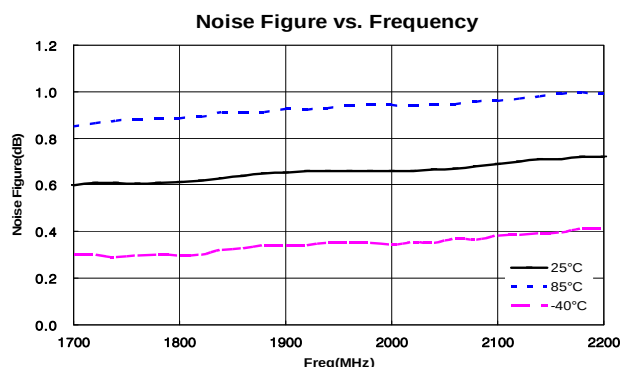
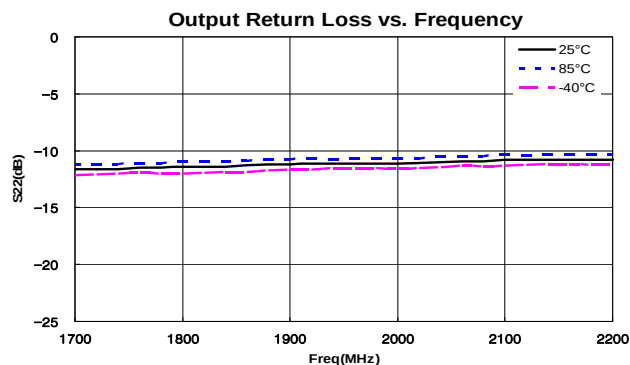
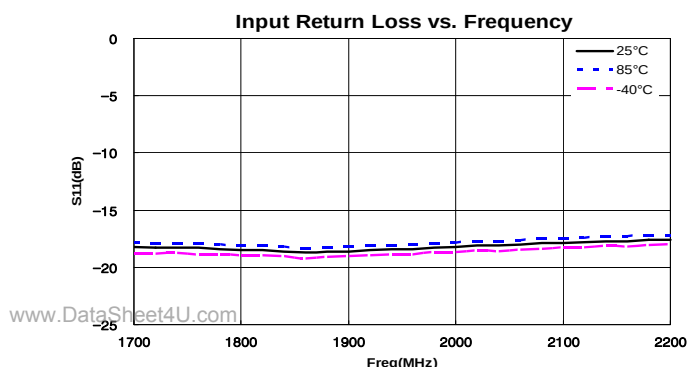
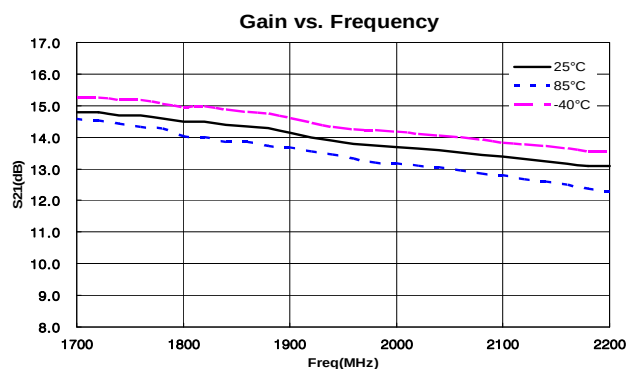
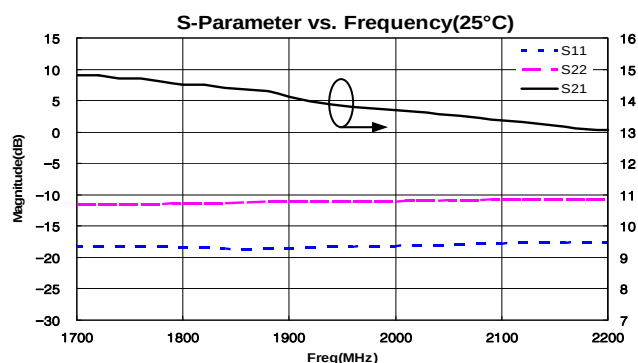


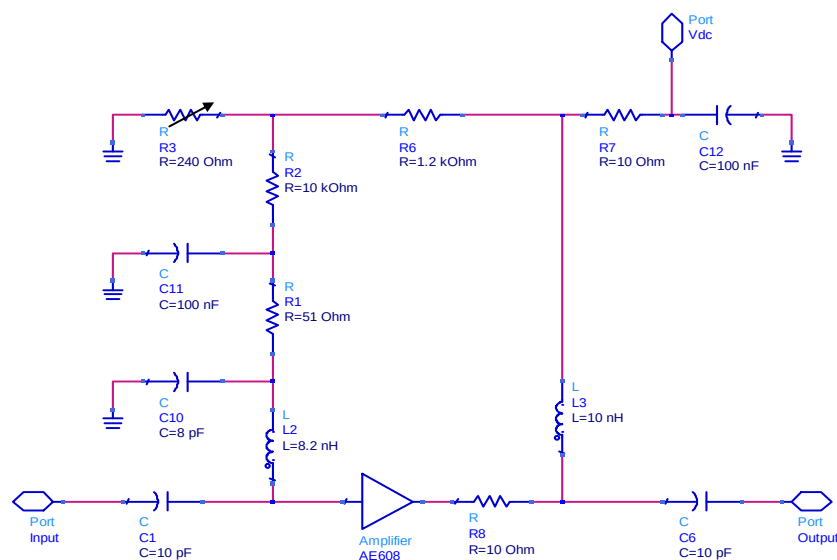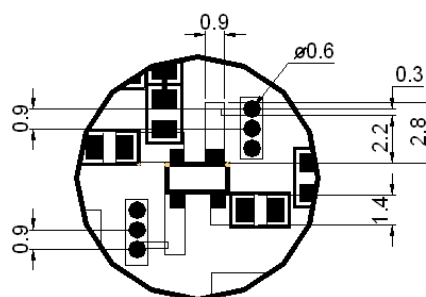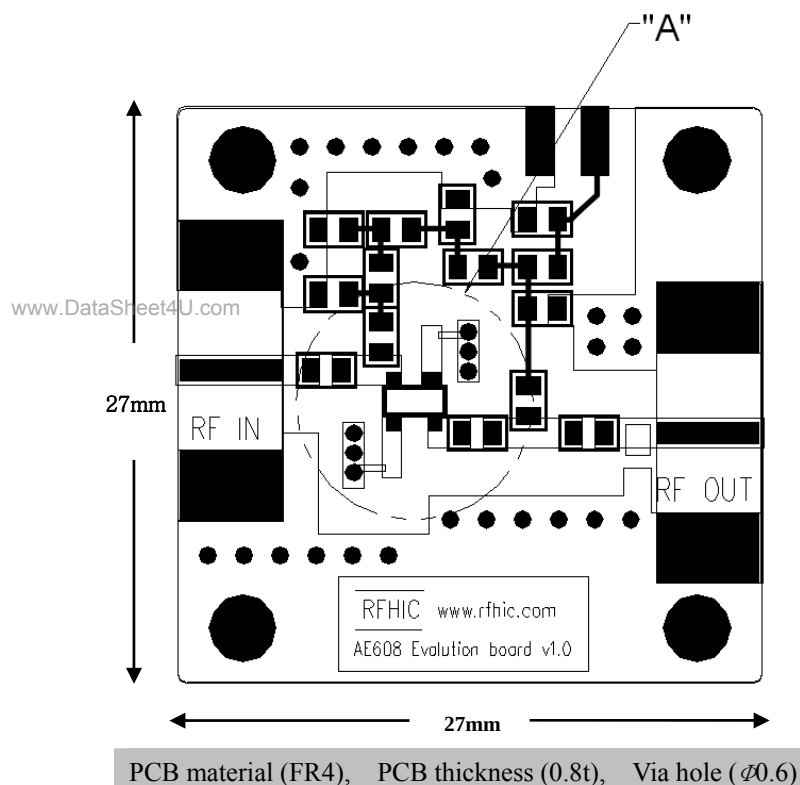
Application Circuit : 1700~2200MHz**PCB Evaluation Board Layout Pattern in mm**

The line-length between AE608 and Ground via can affect RF performance of the device. To obtain the measured data, it is highly recommended to refer to "Detail A" above .


E-pHEMT**AE608****RFHIC****Frequency Range : 2300~2700MHz****Wimax, OFDM Performance Data ($V_d=3V$, $I_d=45mA$, $T_c=25^\circ C$)**

Items	Data	Remarks	Items	Data	Remarks
Gain	12 dB	2600 MHz	NF	0.8 dB	2300~2700 MHz
OIP3	34 dBm	2600 MHz	P1dB	13.5 dBm	2300~2700 MHz

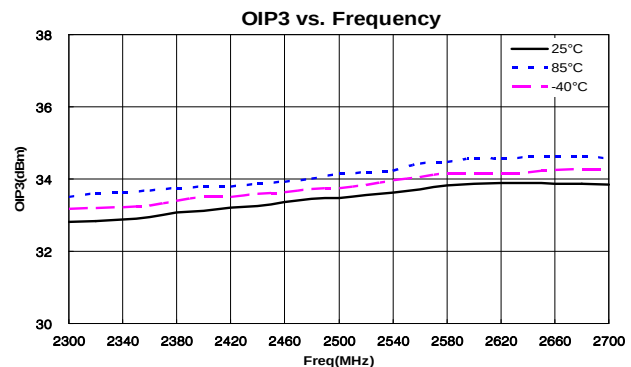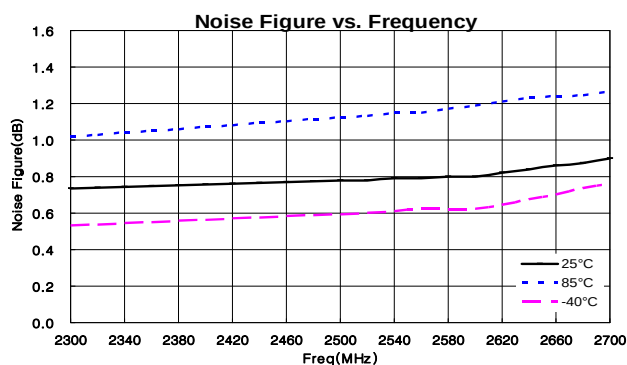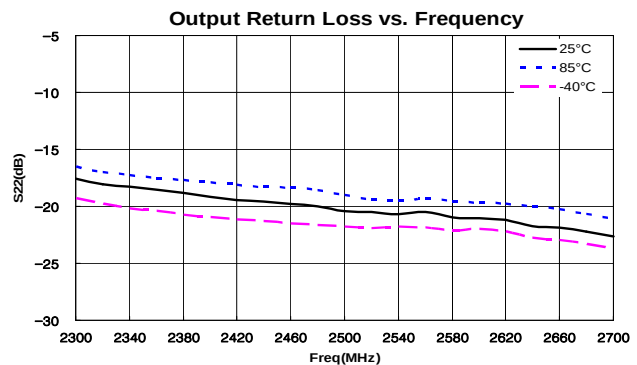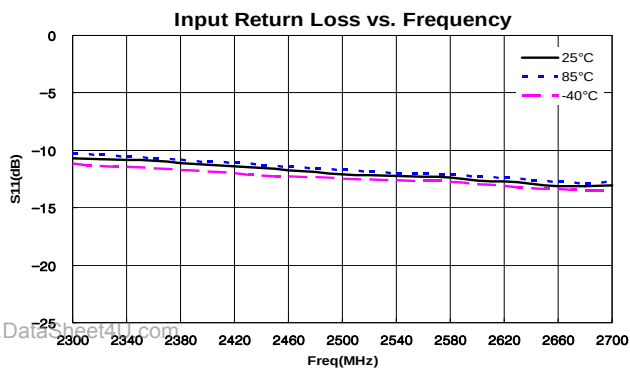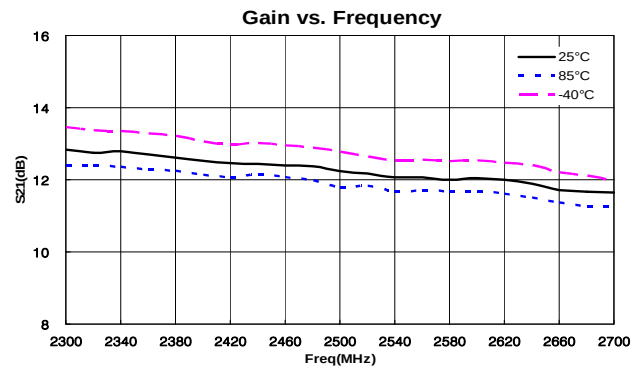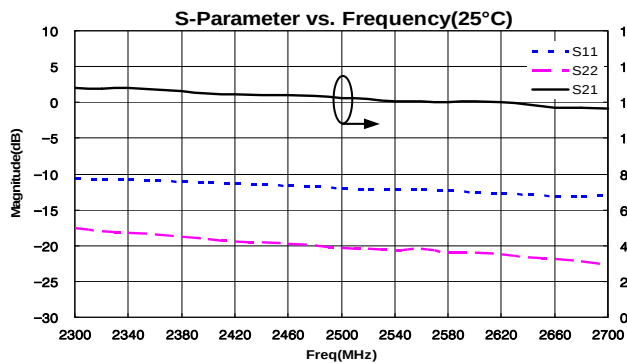

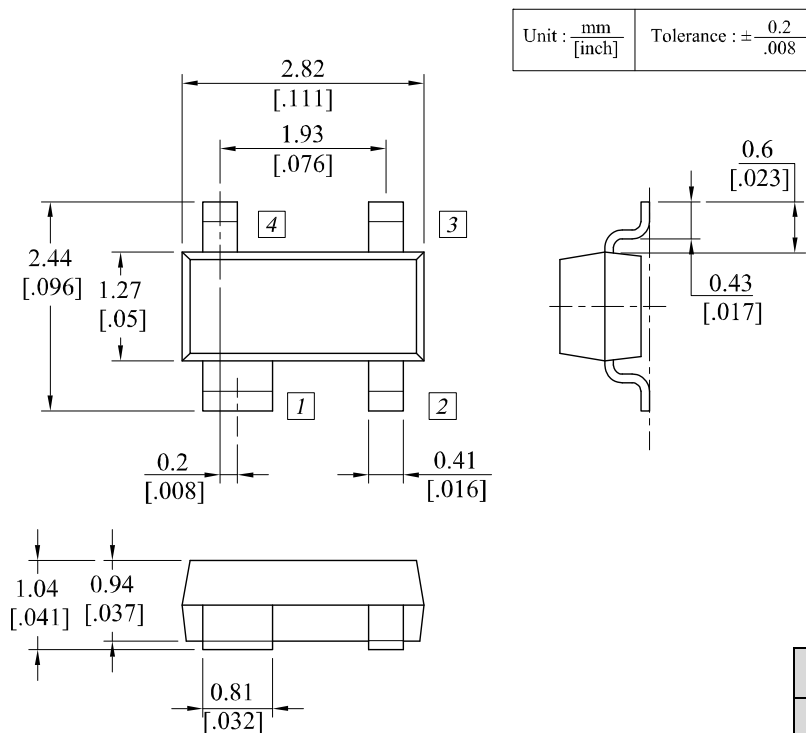E-pHEMT**AE608****RFHIC****Package Dimensions (Type: SOT-143)****! ESD sensitive**

Observe precautions for handling, testing and packaging.

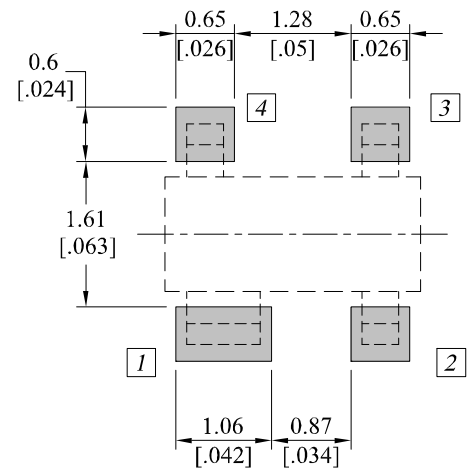Recommended Pattern**Pin Description**

Pin No	Function
1	Ground
2	Input
3	Ground
4	Output, Vd

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.