

AF-11264C

•112x64 dots 1/64 Duty

FEATURE

- 1.Construction : FSTN LCD panel, COF and LED light-guide.
- 2.Drive : S6B1713.
- 3.3.0V power input.
- 4.Extended temperature type.

液晶之友 电话: 020-33819057
http://www.lcdfriends.com



BLOCK DIAGRAM & POWER SUPPLY

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Typ.Value	Unit.
LCD Driving Voltage	VLCD	25°C	8.8	V
Logic Supply Current	IDD	VDD=3.3V	0.2	mA

INTERFACE

1	2	3	4	5	6	7	8	9	10
/CS	/RES	A0	/WR	/RD	DO	D1	D2	D3	D4
11	12	13	14	15					
D5	D6	D7	VSS	VDD					

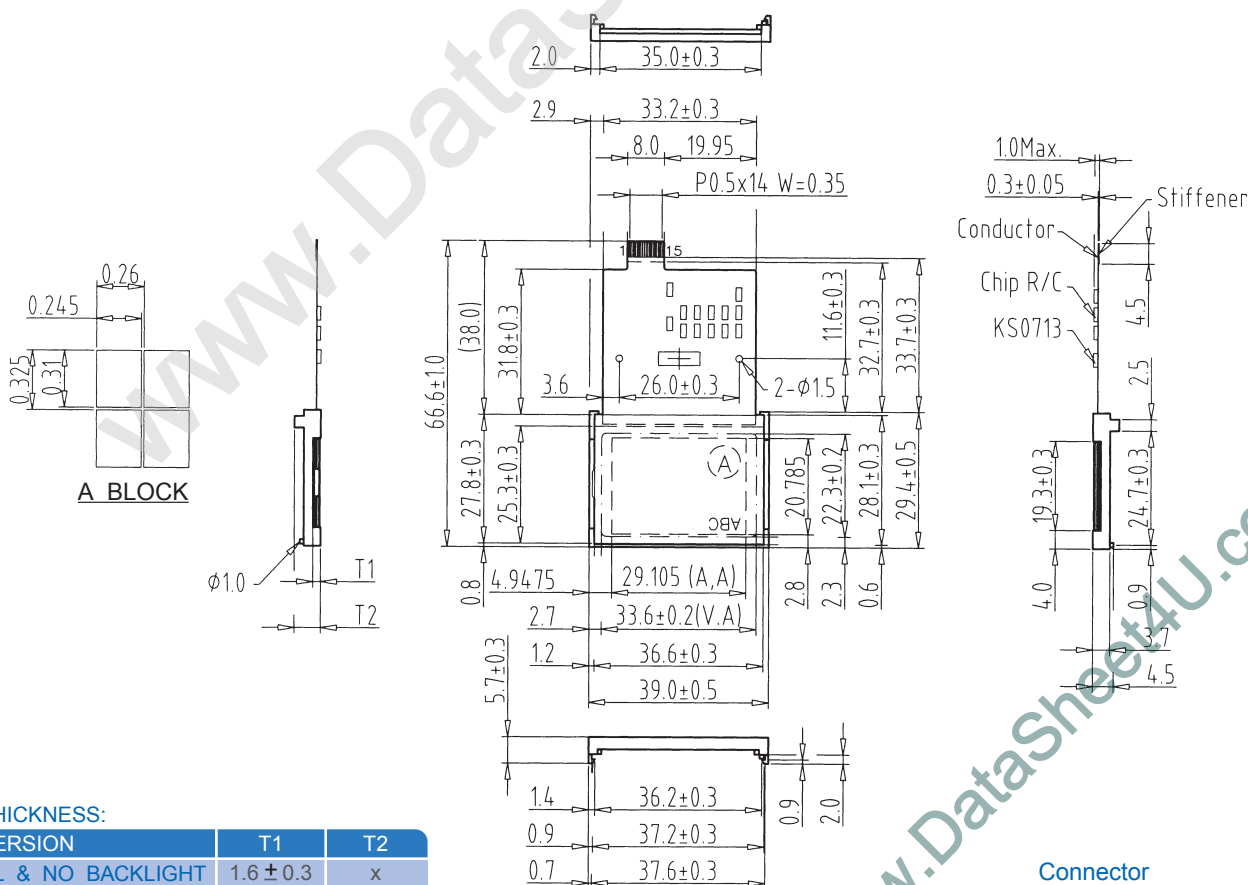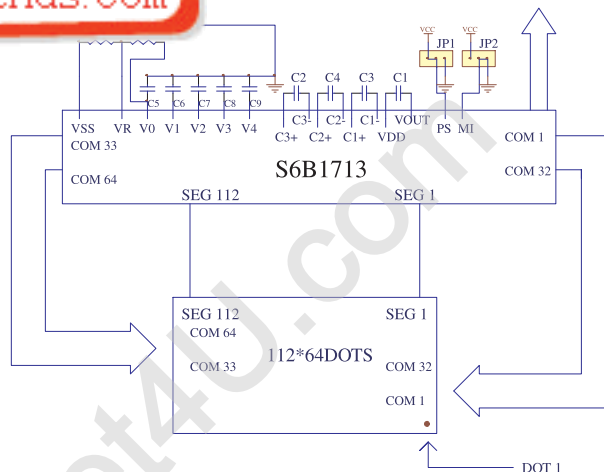

Connector

CN1:Molex:52746-1590