



AF72XXM

350mA Low Power LDO

Features

- Low voltage drop: 0.17V@100mA
- High input voltage: 18V
- Low temperature coefficient
- Large Output Current: >0.35A
- Low Quiescent Current: 1.0uA
- Output voltage accuracy: tolerance $\pm 2\%$
- Built-in current limiter
- SOT-89 ,SOT23-3 and SOT23-5 packages

Applications

- Battery-powered equipment
- Hand-Hold Equipment
- GRS Receivers
- Wireless LAN

General Description

The AF72XXM series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The AF72XXM consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series. SOT-89, SOT23-3 and SOT23-5 packages are available.

Selection Table

Part No.	Output Voltage	Package	Marking
AF7218Mxx	1.8V	SOT-89 SOT23-3 SOT23-5	Refer to Marking rule
AF7225Mxx	2.5V		
AF7228Mxx	2.8V		
AF7230Mxx	3.0V		
AF7233Mxx	3.3V		
AF7236Mxx	3.6V		
AF7245Mxx	4.5V		
AF7250Mxx	5.0V		


Order Information

AF72①②③④⑤

Designator	Symbol	Description
① ②	Integer	Output Voltage(1.8~5.0V)
③	M	Standard
④	P	Package:SOT89
	M	Package:SOT23-3
	C	Package:SOT23-5
⑤	R	RoHS / Pb Free
	G	Halogen Free


Note: "①②" stands for output voltages. Other voltages can be specially customized

Block Diagram

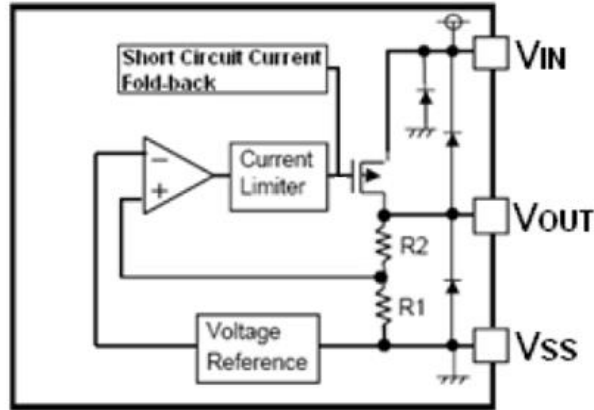


Pin Assignment


SOT89 (Top view)



SOT23-3 (Top view)



SOT23-5 (Top view)



Absolute Maximum Ratings

Supply Voltage-0.3V to 18V


Storage Temperature-40°C to 125°C

Operating Temperature-40°C to 85°C


Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Marking Rule

(1) SOT23-3 and SOT23-5



SOT-23
(TOP VIEW)



SOT23-5
(TOP VIEW)


List of Product Name vs. Product Code

Product Name	Product Code		
	(1)	(2)	(3)
AF7212	S	A	A
AF7213	S	A	B
AF7214	S	A	C
AF7215	S	A	D
AF7216	S	A	E
AF7217	S	A	F
AF7218	S	A	G
AF7219	S	A	I
AF7220	S	A	J
AF7221	S	A	K
AF7222	S	A	L
AF7223	S	A	M
AF7224	S	A	N
AF7225	S	A	O
AF7226	S	A	P
AF7227	S	A	Q
AF7228	S	A	R
AF7229	S	A	T
AF7230	S	A	U
AF7231	S	A	V

Product Name	Product Code		
	(1)	(2)	(3)
AF7232	S	A	W
AF7233	S	A	X
AF7234	S	A	Y
AF7235	S	A	Z
AF7236	S	B	A
AF7237	S	B	B
AF7238	S	B	C
AF7239	S	B	D
AF7240	S	B	E
AF7241	S	B	F
AF7242	S	B	J
AF7243	S	B	H
AF7244	S	B	I
AF7245	S	B	J
AF7246	S	B	K
AF7247	S	B	L
AF7248	S	B	M
AF7249	S	B	N
AF7250	S	B	O

Remark Please contact our sales office for products with output voltage values other than the above.

(2) SOT89

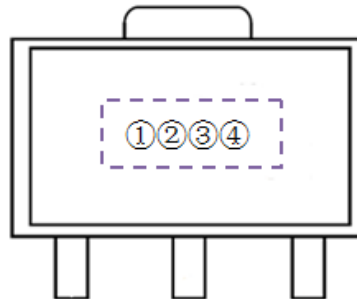

SOT-89
(TOP VIEW)

Product Code: E					
Output Voltage Code					
Vout	Code	Vout	Code	Vout	Code
1.5V	1	2.7V	C	3.9V	O
1.6V	2	2.8V	D	4.0V	P
1.7V	3	2.9V	E	4.1V	Q
1.8V	4	3.0V	F	4.2V	R
1.9V	5	3.1V	G	4.3V	S
2.0V	6	3.2V	H	4.4V	T
2.1V	7	3.3V	I	4.5V	U
2.2V	8	3.4V	J	4.6V	V
2.3V	9	3.5V	K	4.7V	W
2.4V	0	3.6V	L	4.8V	X
2.5V	A	3.7V	M	4.9V	Y
2.6V	B	3.8V	N	5.0V	Z
Data Code: XX					

Note: The last two of them are based on the time of this product which is the first time into production, and the third is the launch of this product ,it can be in 1 ~ 9 , which is expressed in "0" in October, in November with an "A", in December with "B"; the fourth is of the launch of the product, such as expressed in "0" in 2010, in "3" in 2013. For example: EZ81 represents AF7250PR product is first put into production in August in 2011.



AF72XXM

350mA Low Power LDO

Electrical Characteristics

AF72XXM for any output voltage



(Ta=25℃)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	Vout	Vin=Vout+1V 1.0mA≤Iout≤30mA	Vout×0.98	--	Vout×1.02	V
Output Current*1	Iout	Vin-Vout=1V	--	350	--	mA
Low dropout*2	Vdrop	Refer to the next table				
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	1.6V≤Vin≤8V Iout=100mA	--	0.05	0.2	%/V
Load Regulation	△Vout	Vin= Vout+1V 1.0mA≤Iout≤100mA	--	12	30	mV
Output voltage Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta Ta}$	Iout=30mA 0℃≤Ta≤70℃	--	±100	--	Ppm/℃
PSRR	PSRR	F=1KHz Vin=Vout+1V	--	40	--	dB
Supply Current	Iss1	--	--	1	2	uA
Input Voltage	Vin	--	--	--	15	V

Electrical Characteristics by Output Voltage:

Output Voltage Vout(V)	Dropout Voltage Vdif (V)		
	Conditions	Typ.	Max.
Vout ≤ 2.0V	Iout=60 mA	0.1	0.12
2.0 < Vout ≤ 3.0	Iout=80 mA	0.12	0.14
3.0 < Vout ≤ 4.0	Iout=100 mA	0.16	0.18
4.0 < Vout ≤ 5.0		0.17	0.18
3.0 < Vout ≤ 4.0	Iout=200 mA	0.21	0.24
4.0 < Vout ≤ 6.0		0.20	0.22
3.0 < Vout ≤ 4.0	Iout=350 mA	0.7	0.75
4.0 < Vout ≤ 6.0		0.72	0.76

Typical Application


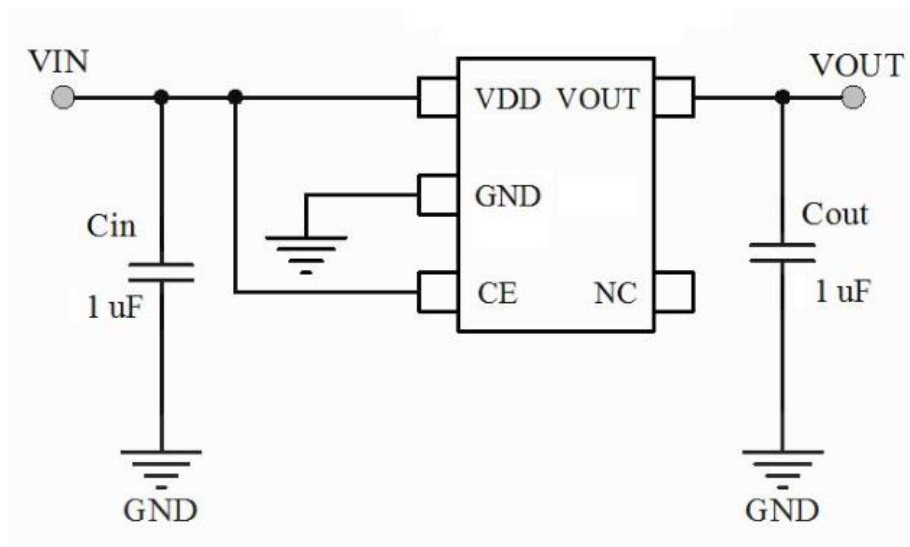
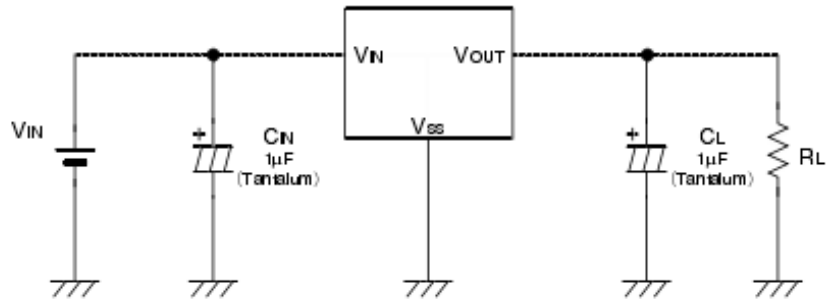


Note1: Input capacitor $C_{IN}=1\mu F$.


Note2: Output capacitor $C_{OUT}=1\mu F/6.8\mu F$ (1 μ F Tantalum capacitor or 6.8 μ F ceramic capacitor is recommended).

Typical Performance Characteristics


(1) Output Voltage vs Input voltage

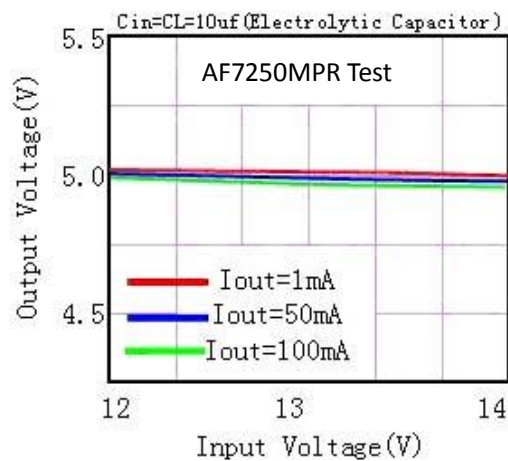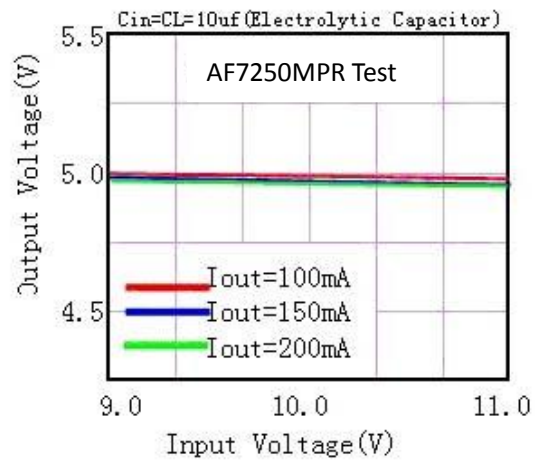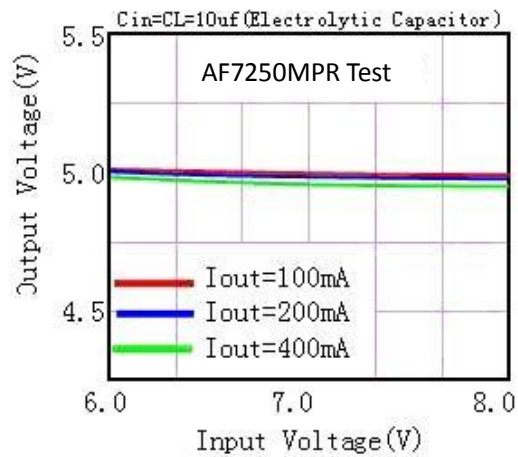


(2) Output Voltage vs. Output Current

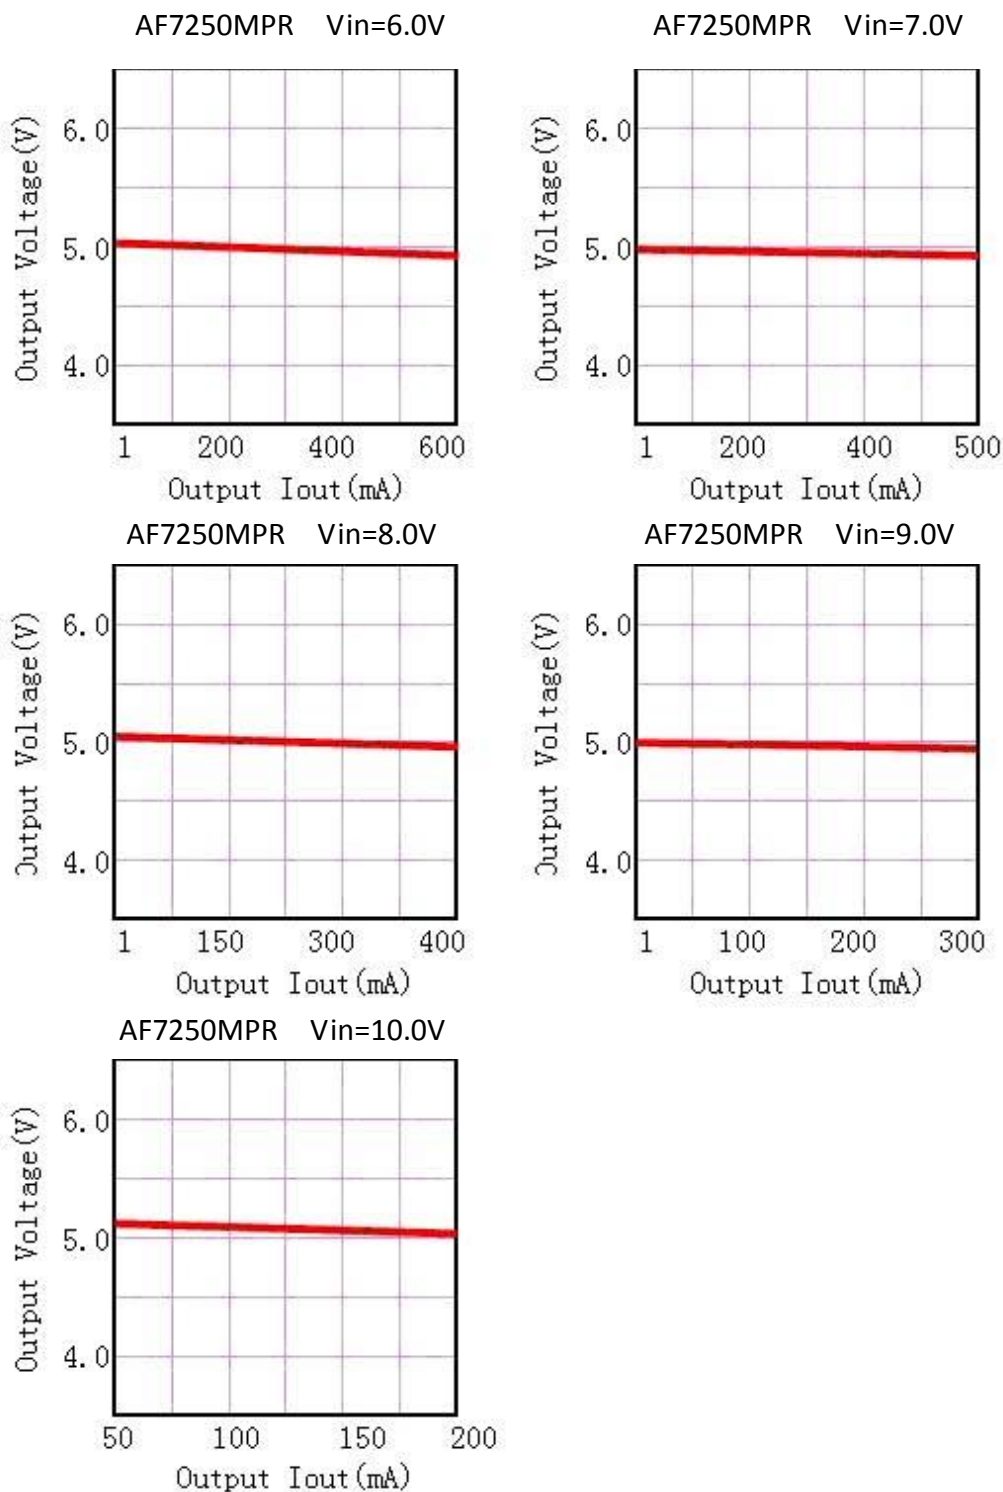

(3) Output Voltage vs.Ambient Temperature

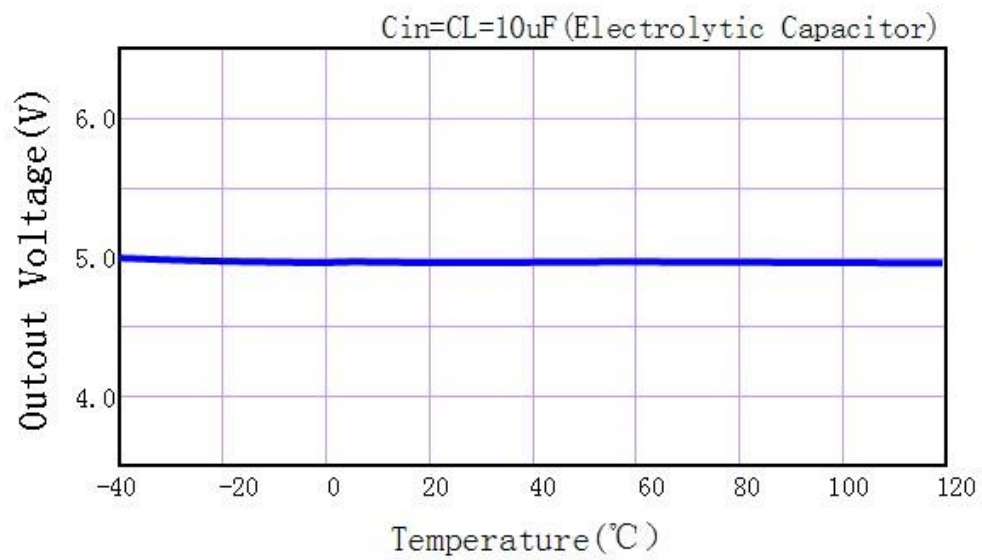


Package Information
3-pin SOT89 Outline Dimensions

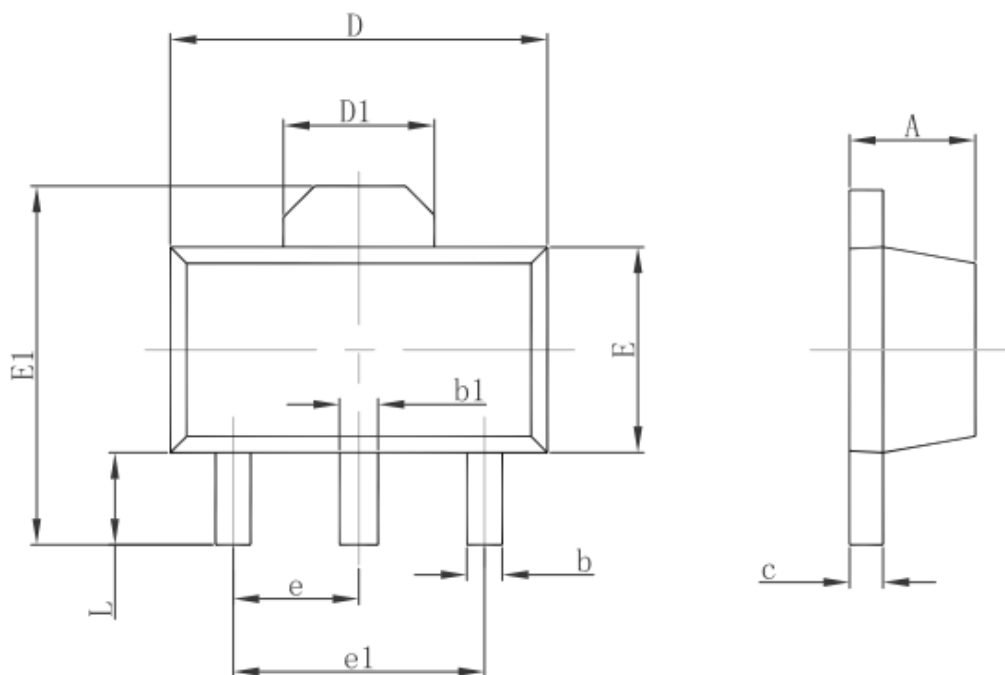


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

3-pin SOT23-3 Outline Dimensions

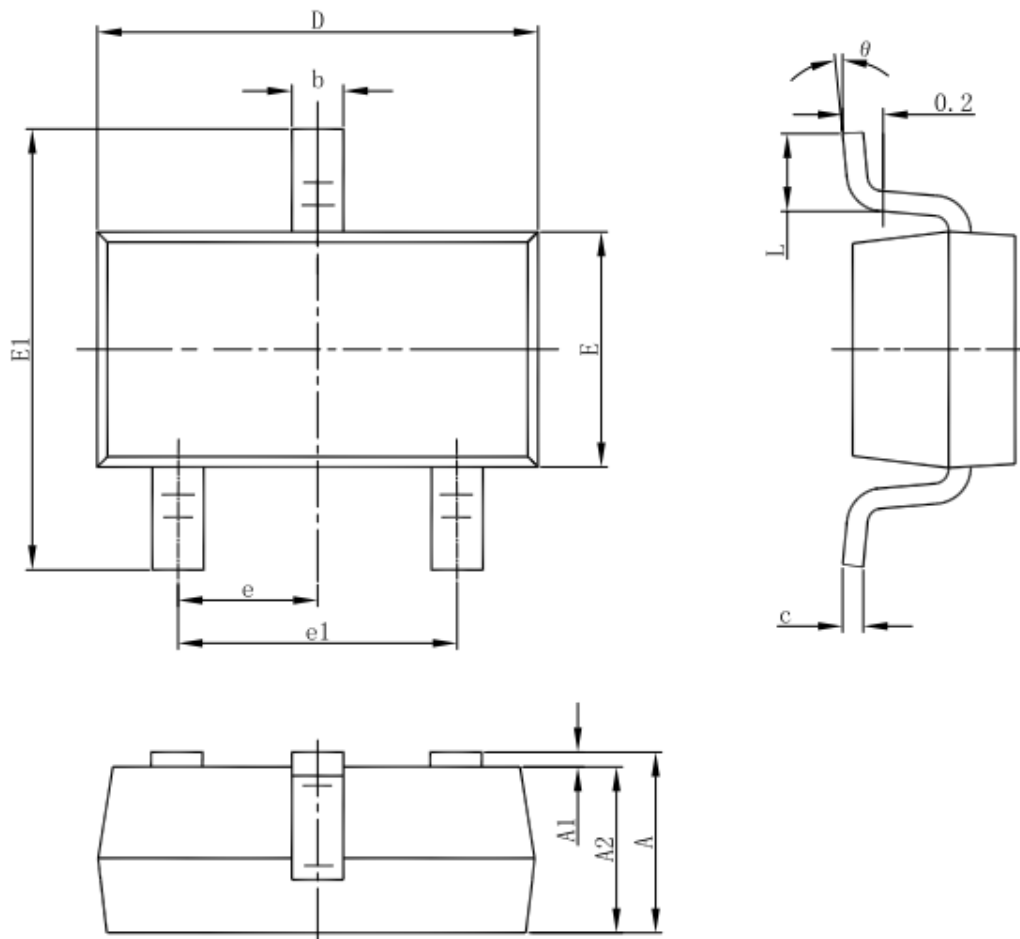

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT23-5 Outline Dimensions

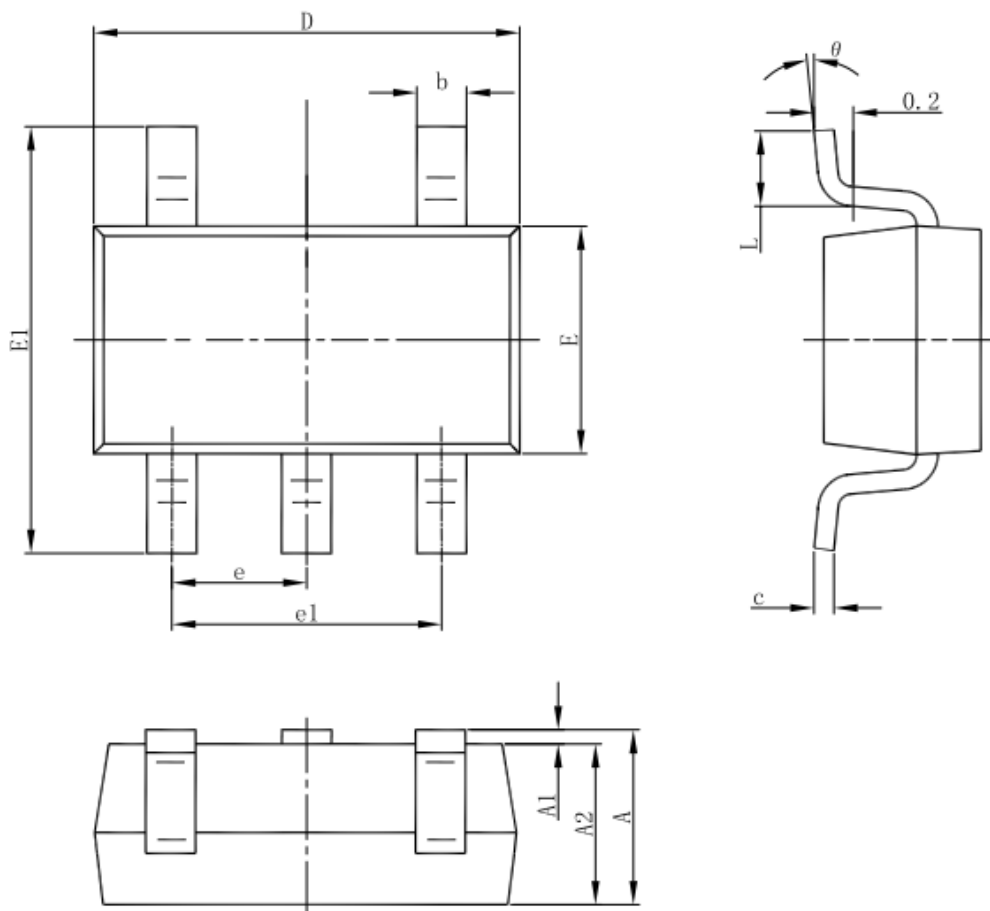

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



AF72XXM

350mA Low Power LDO

DISCLAIMER

ANALOG FUTURE COMPANY RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. ANALOG FUTURE DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE A STATISTICAL SUMMARY BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.