

**SINGLE PHASE HALL EFFECT LATCH****AH477****Description**

The AH477 is an integrated Hall sensor with output driver designed for electronic commutation of brushless DC motor applications. The device includes an on-chip Hall sensor for magnetic sensing, an amplifier that amplifies the Hall voltage, a comparator to provide switching hysteresis for noise rejection, a bi-directional drivers for sinking and driving large current load. It also includes an internal bandgap regulator to provide temperature compensated bias for internal circuits and allows a wide operating supply voltage range.

Placing the device in a variable magnetic field, if the magnetic flux density is larger than threshold  $B_{OP}$ , the DO is turned to sink and DOB is turned to drive. This output state is held until the magnetic flux density reverses and falls below  $B_{RP}$ , then causes DO to be turned to drive and DOB turned to sink.

**Parametric Table**

Supply Voltage (V)	4 to 20
Output Down Saturation Voltage (V)	0.25
Output Up Saturation Voltage (V)	1.0
Supply Current (mA)	14
Hysteresis (Gauss)	70
Package	TO-94

**Features**

- On-Chip Hall Sensor
- Operating Voltage: 4V to 20V
- H-Bridge Output Drivers for Single Coil
- Internal Bandgap Regulator for Temperature Compensation
- Low Output Switching Current Noise
- -20°C to 85°C Operating Temperature
- Low Profile TO-94 (SIP-4L) Package
- ESD Rating: 3000V (Human Body Model)

**Benefits**

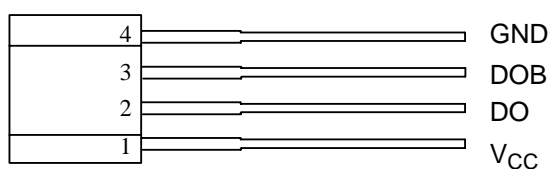
- Minimum External Components
- Good High Temperature Performance
- High Efficiency
- Rotate Reposefully

**Applications**

- Single-Coil Brushless DC Motor
- Single-Coil Brushless DC Fan

**Additional Available Materials**

- Samples
- Preliminary Datasheet
- Reliability Report
- ESD Report

**SINGLE PHASE HALL EFFECT LATCH****AH477****Pin Configuration**Z4 Package  
(TO-94)

www.DataSheet4U.com

**Ordering Information Example**

Package	Temperature Range	Part Number	Marking ID	Packing Type
TO-94	-20 to 85 °C	AH477Z4-AE1	AH477Z4-AE1	Bulk
		AH477Z4-BE1	AH477Z4-BE1	Bulk

Detailed information please refer to the relevant datasheet.

**Sales Office:****USA**

30920 Huntwood Ave. Hayward, CA 94544,  
USA  
Tel : +1-510-324-2988  
Fax : +1-510-324-2788

**Taiwan**

4F, 298-1 Rui Guang Road, Nei-Hu District, Taipei,  
Taiwan  
Tel : 886-2-2656-2808  
Fax : 886-2-2656-2806

**Shanghai**

8F, B Zone, 900 Yi Shan Road, Shanghai 200233,  
China  
Tel : 86-21-6495 9539  
Fax : 86-21-6485 9673

**Shenzhen**

Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian  
District, Shenzhen 518026, China  
Tel : 86-755-8826 7951  
Fax : 86-755-8826 7865