


2mm SINGLE LED TOP VIEW CIRCUIT BOARD INDICATOR
(SUBMINATURE SOLID STATE LAMPS)

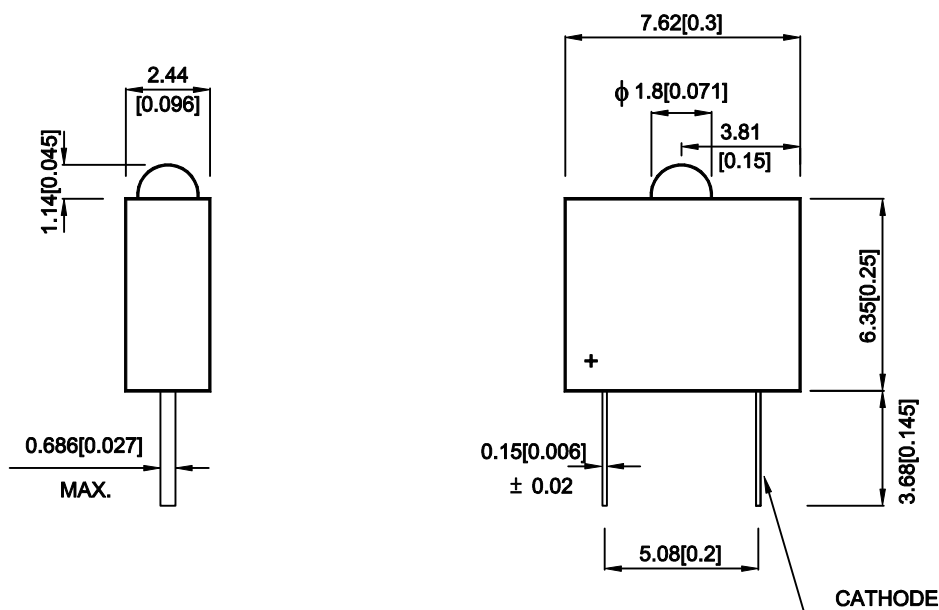

UNIT : MM[INCH]

TOLERANCE : $\pm 0.25[\pm 0.01]$ UNLESS OTHERWISE NOTED.

Dice	Condition	Peak Emission Wavelength			UNIT
		Min.	Typ.	Max.	
HIGH EFFICIENCY RED (GaAsP/GaP)	$I_F = 20\text{mA}$	-	625	-	nm

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=14V		Viewing Angle
			Min.	Typ.	2 θ 1/2
AM2520EJ/ID14V	HIGH EFFICIENCY RED (GaAsP/GaP)	RED DIFFUSED	6	10	60°

APPROVED:

J.Lu

CHECKED:

J. Chao

DRAWN :

L.N. Sheu

SCALE :

3 : 1

DATA NO. : F6756

V.1

DATE : JUN/28/2000