




- ▼ Simple Drive Requirement
- ▼ Lower Gate Charge
- ▼ Fast Switching Performance
- ▼ RoHS Compliant & Halogen-Free




N-CH	BV_{DSS}	60V
	$R_{DS(ON)}$	64mΩ
	I_D	4.5A
P-CH	BV_{DSS}	-60V
	$R_{DS(ON)}$	125mΩ
	I_D	-3A

Description

AP4578 series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The SO-8 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for voltage conversion or switch applications.

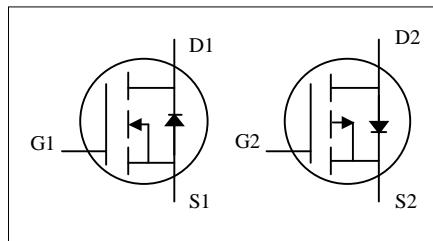

Absolute Maximum Ratings@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Rating		Units
		N-channel	P-channel	
V_{DS}	Drain-Source Voltage	60	-60	V
V_{GS}	Gate-Source Voltage	± 20	± 20	V
$I_D @ T_A = 25^\circ\text{C}$	Drain Current, $V_{GS} @ 10\text{V}^3$	4.5	-3	A
$I_D @ T_A = 70^\circ\text{C}$	Drain Current, $V_{GS} @ 10\text{V}^3$	3.6	-2.4	A
I_{DM}	Pulsed Drain Current ¹	20	-20	A
$P_D @ T_A = 25^\circ\text{C}$	Total Power Dissipation	2.0		W
T_{STG}	Storage Temperature Range	-55 to 150		°C
T_J	Operating Junction Temperature Range	-55 to 150		°C

Thermal Data

Symbol	Parameter	Value	Unit
R_{thj-a}	Maximum Thermal Resistance, Junction-ambient ³	62.5	°C/W


N-CH Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	60	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=1\text{mA}$	-	0.05	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=4\text{A}$	-	55	64	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=2\text{A}$	-	65	80	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	1	-	3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=4\text{A}$	-	7	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=60\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	μA
	Drain-Source Leakage Current ($T_j=70^\circ\text{C}$)	$V_{\text{DS}}=48\text{V}, V_{\text{GS}}=0\text{V}$	-	-	25	μA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm 20\text{V}$	-	-	± 100	nA
Q_g	Total Gate Charge	$I_{\text{D}}=4\text{A}$	-	9	17	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=48\text{V}$	-	3	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=4.5\text{V}$	-	4	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DS}}=30\text{V}$	-	9	-	ns
t_r	Rise Time	$I_{\text{D}}=1\text{A}$	-	5	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=10\text{V}$	-	22	-	ns
t_f	Fall Time	$R_D=30\Omega$	-	7	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	730	1170	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=25\text{V}$	-	80	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	60	-	pF
R_g	Gate Resistance	f=1.0MHz	-	1.8	2.7	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_{\text{S}}=1.7\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.2	V
t_{rr}	Reverse Recovery Time	$I_{\text{S}}=4\text{A}, V_{\text{GS}}=0\text{V}$	-	28	-	ns
Q_{rr}	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	39	-	nC

**P-CH Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-60	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}, I_{\text{D}}=-1\text{mA}$	-	-0.04	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-3\text{A}$	-	100	125	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-2\text{A}$	-	120	150	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-2\text{A}$	-	5	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=-60\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-1	μA
	Drain-Source Leakage Current ($T_j=70^\circ\text{C}$)	$V_{\text{DS}}=-48\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-25	μA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm20\text{V}$	-	-	±100	nA
Q_g	Total Gate Charge ²	$I_{\text{D}}=-3\text{A}$	-	12	20	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=-48\text{V}$	-	2	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	6	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time ²	$V_{\text{DS}}=-30\text{V}$	-	10	-	ns
t_r	Rise Time	$I_{\text{D}}=-1\text{A}$	-	6	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=-10\text{V}$	-	33	-	ns
t_f	Fall Time	$R_D=30\Omega$	-	6	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	905	1450	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=-25\text{V}$	-	90	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	75	-	pF
R_g	Gate Resistance	f=1.0MHz	-	12	18	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_S=-1.7\text{A}, V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
t_{rr}	Reverse Recovery Time	$I_S=-3\text{A}, V_{\text{GS}}=0\text{V}$	-	36	-	ns
Q_{rr}	Reverse Recovery Charge	dl/dt=-100A/ μs	-	55	-	nC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in² copper pad of FR4 board, t \leq 10sec ; 135°C/W when mounted on min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

AP4578GM-HF



N-Channel

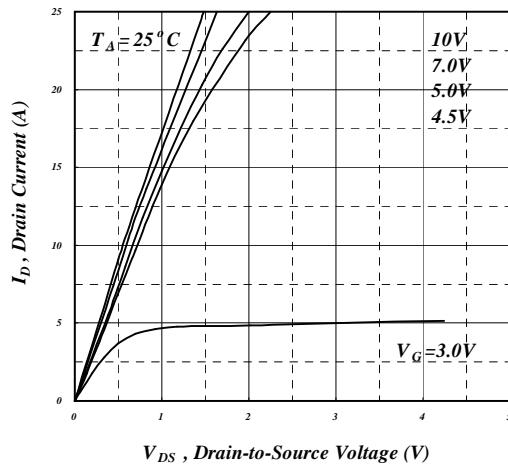


Fig 1. Typical Output Characteristics

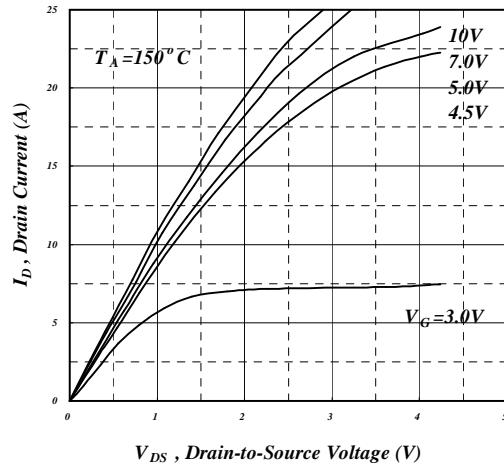


Fig 2. Typical Output Characteristics

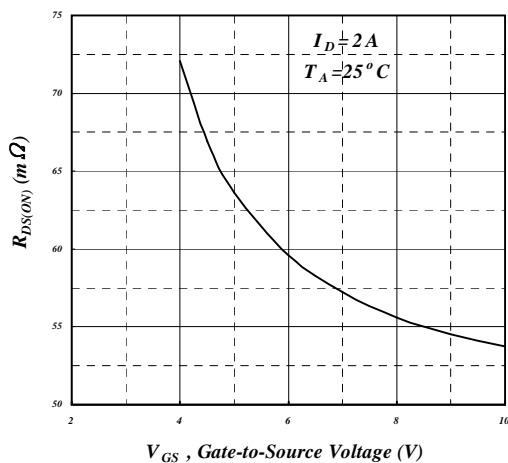


Fig 3. On-Resistance v.s. Gate Voltage

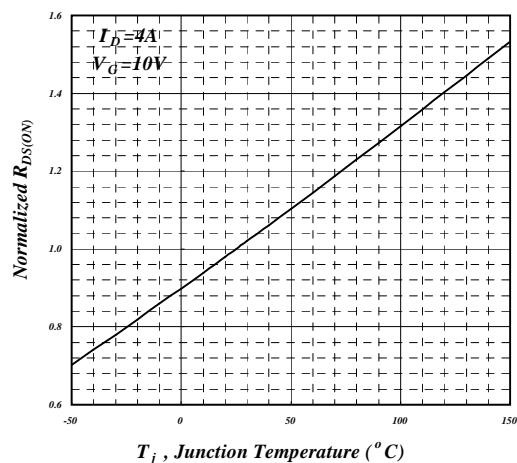


Fig 4. Normalized On-Resistance v.s. Junction Temperature

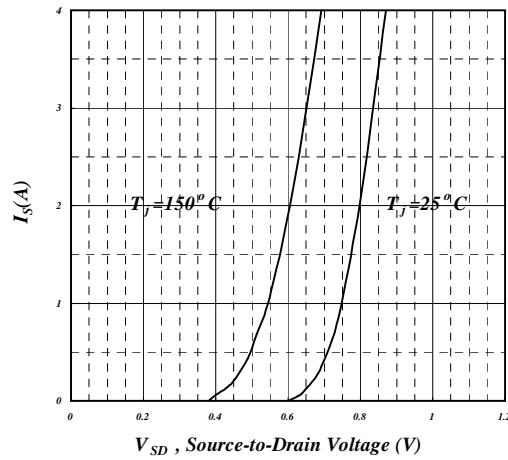


Fig 5. Forward Characteristic of Reverse Diode







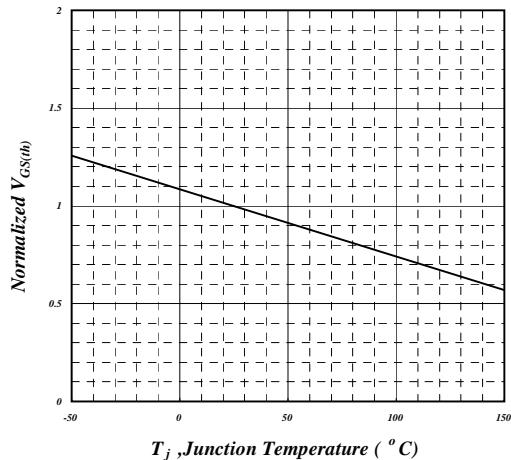


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

**N-Channel****Fig 7. Gate Charge Characteristics****Fig 8. Typical Capacitance Characteristics****Fig 9. Maximum Safe Operating Area****Fig 10. Effective Transient Thermal Impedance****Fig 11. Transfer Characteristics****Fig 12. Gate Charge Waveform**

AP4578GM-HF

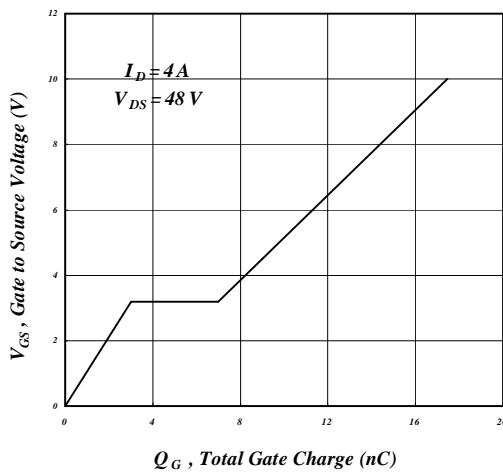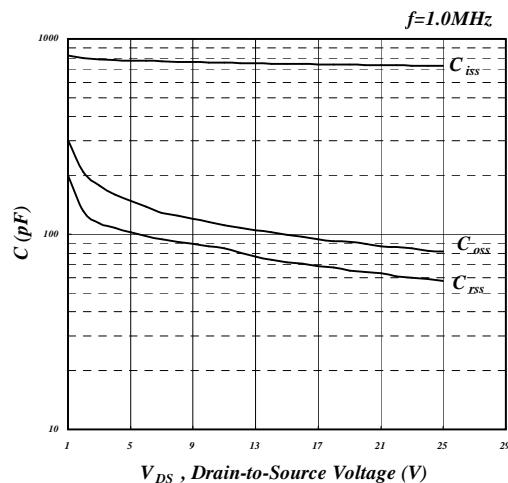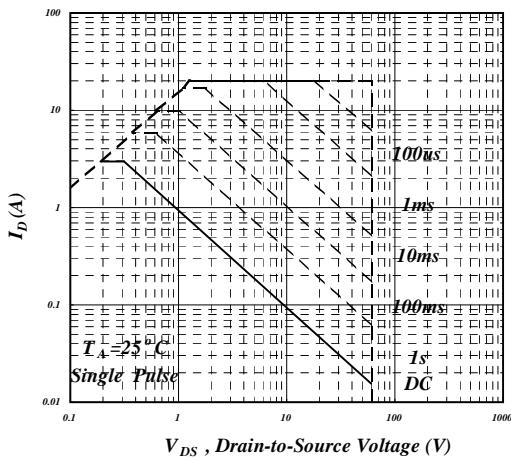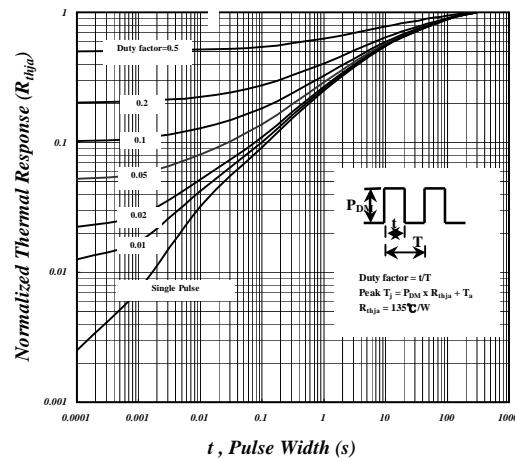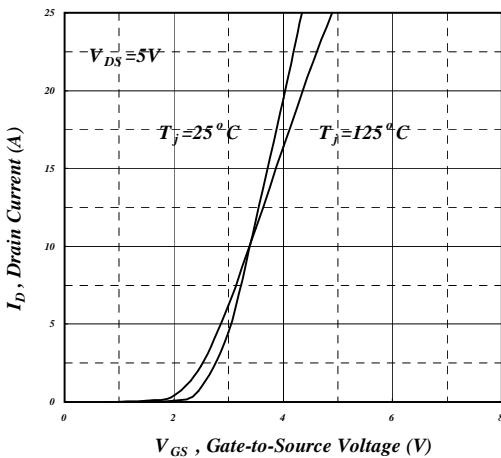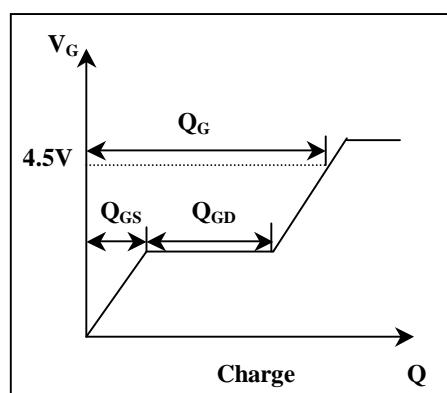

P-Channel

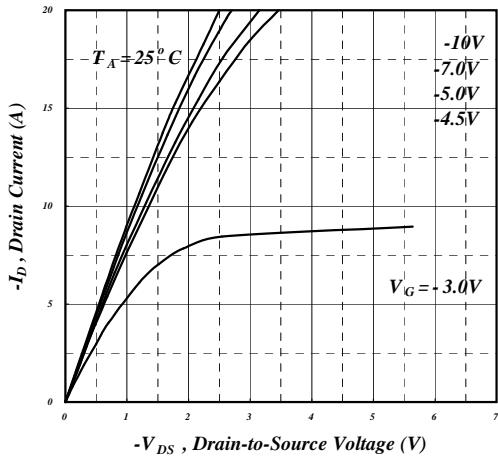


Fig 1. Typical Output Characteristics

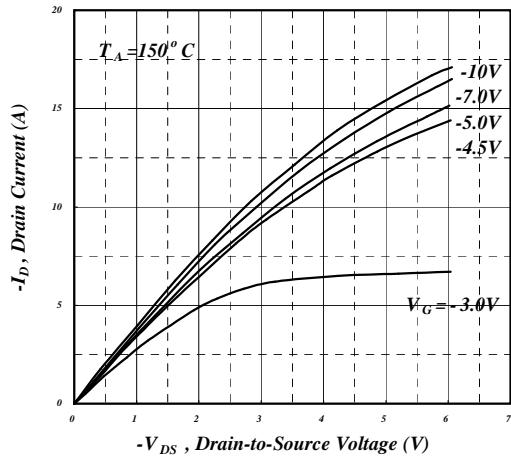


Fig 2. Typical Output Characteristics

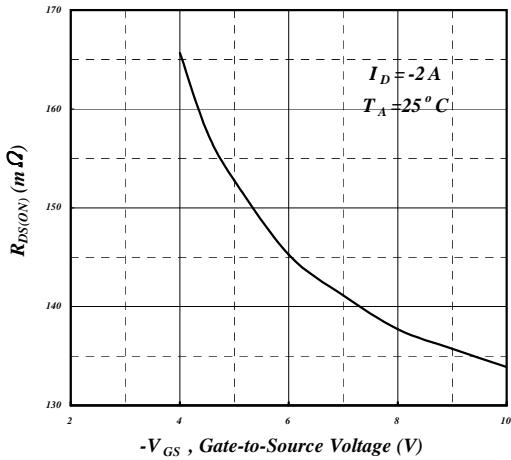


Fig 3. On-Resistance v.s. Gate Voltage

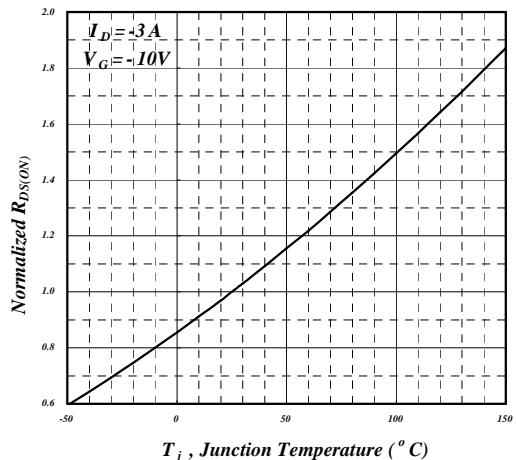


Fig 4. Normalized On-Resistance v.s. Junction Temperature

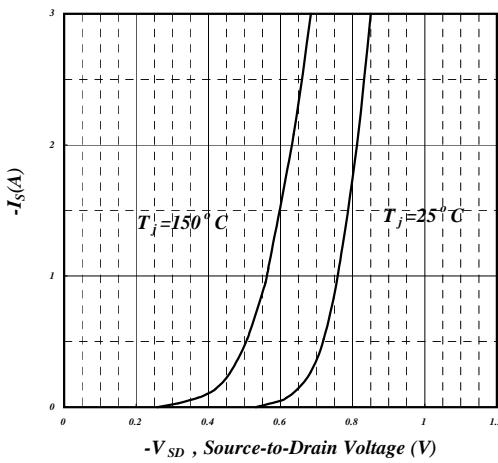


Fig 5. Forward Characteristic of Reverse Diode

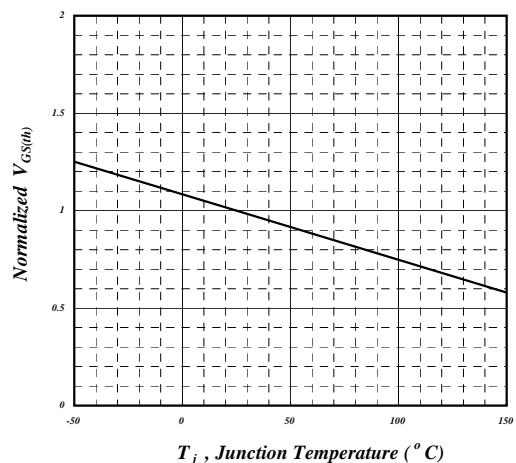


Fig 6. Gate Threshold Voltage v.s. Junction Temperature



P-Channel

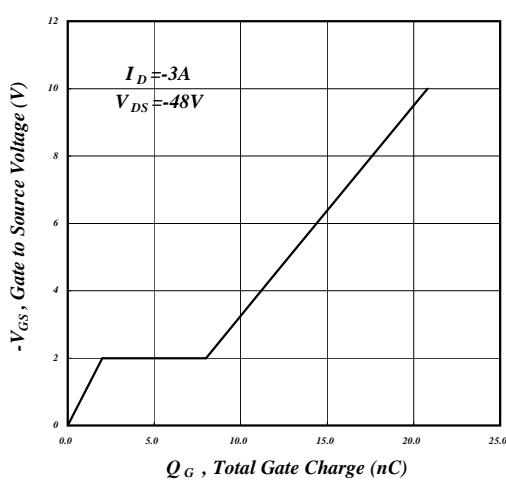


Fig 7. Gate Charge Characteristics

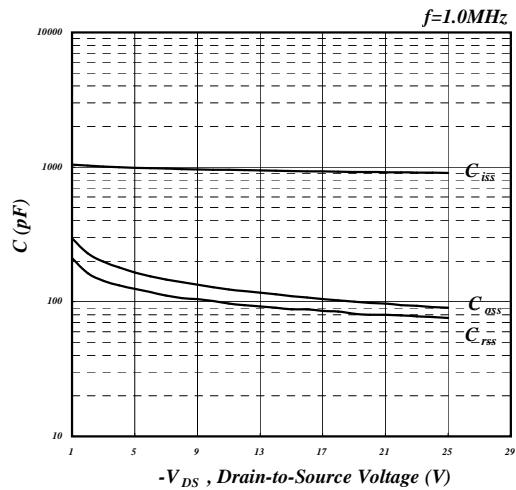


Fig 8. Typical Capacitance Characteristics

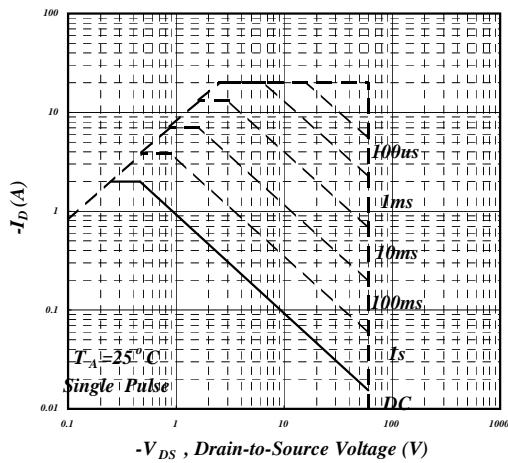


Fig 9. Maximum Safe Operating Area

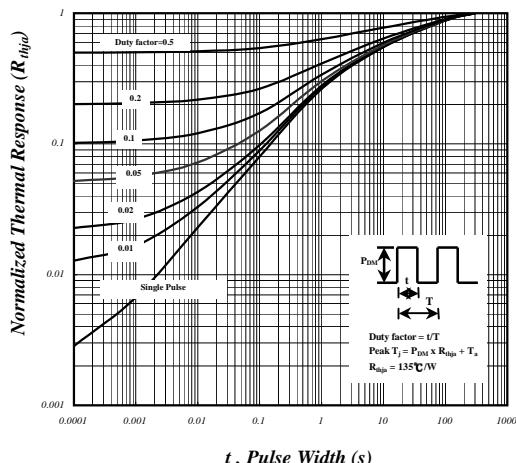


Fig 10. Effective Transient Thermal Impedance

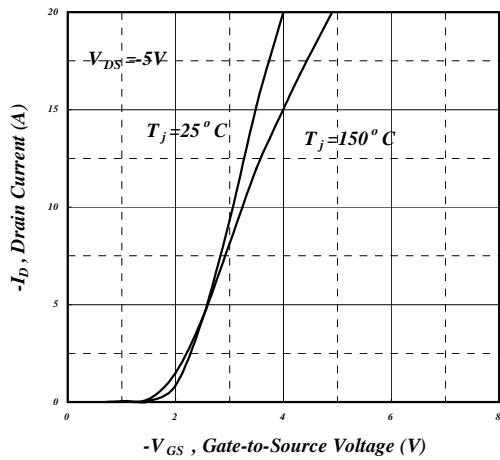


Fig 11. Transfer Characteristics

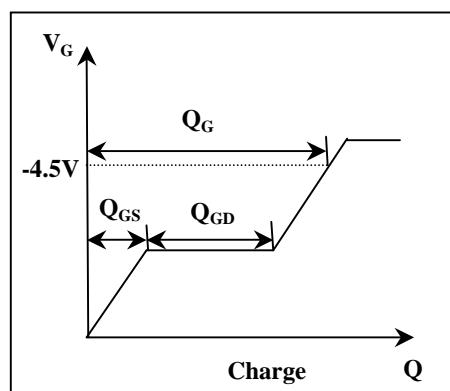


Fig 12. Gate Charge Waveform



AP4578GM-HF

MARKING INFORMATION

