

## Dual Channel 300mA Low Dropout Linear Regulator


### Features

- **Dual Regulator Outputs**
- **Low Dropout Voltage: Typical 240mV at 300mA**
- **Wide Input Voltage Range: 2.5V to 5.5V**
- **Low Quiescent Current: Typical 58mA**
- **High PSRR: 70dB at 1kHz**
- **Low Shutdown Current: <1mA**
- **Shutdown Function**
- **Output Current-Limit Protection**
- **Short-Circuit Current-Limit Protection**
- **Over-Temperature Protection**
- **Lead Free and Green Devices Available (RoHS Compliant)**

### General Description

The APL5537 is a dual channel low dropout linear regulator, which operates from 2.5V to 5.5V input voltage and delivers up to 300mA output current at each channel. Typical dropout voltage is only 240mV at 300mA. The APL5537 with low quiescent current, high PSRR, and low noise is ideal for battery powered system appliances. Other features include logic-controlled shutdown mode, over-temperature protection, short-circuit current-limit, and current-limit protection to ensure specified output current. The APL5537 is available in the TSOT-23-6A and TDFN 1.6x1.6-6 packages.

### Pin Configurations

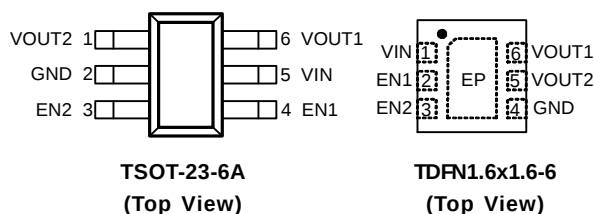

### Applications

- **Mobile Phone**
- **GPS Navigation**
- **Blue Tooth Headset**

### Ordering and Marking Information

|                                                                                                                                        |                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>APL5537 □□□□-□□□</p> <p>Assembly Material</p> <p>Handling Code</p> <p>Temperature Range</p> <p>Package Code</p> <p>Voltage Code</p> | <p>Voltage Code<br/>See Voltage Code Table</p> <p>Package Code<br/>CT : TSOT-23-6A      QB : TDFN1.6x1.6-6</p> <p>Operating Ambient Temperature Range<br/>I : -40 to 85°C</p> <p>Handling Code<br/>TR : Tape &amp; Reel</p> <p>Assembly Material<br/>G : Halogen and Lead Free Device</p> |
| <p>APL5537-VVCT: 7VVX</p>                                                                                                              | <p>VV - Voltage Code<br/>X - Date Code</p>                                                                                                                                                                                                                                                |
| <p>APL5537-VVQB: 7VV X</p>                                                                                                             | <p>VV - Voltage Code<br/>X - Date Code</p>                                                                                                                                                                                                                                                |

Note : ANPEC lead-free products contain molding compounds/die attach materials and 100% matte tin plate termination finish; which are fully compliant with RoHS. ANPEC lead-free products meet or exceed the lead-free requirements of IPC/JEDEC J-STD-020D for MSL classification at lead-free peak reflow temperature. ANPEC defines "Green" to mean lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight).

ANPEC reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

## Voltage Code Table

| Output Voltage        |                       | Voltage Code | Output Voltage        |                       | Voltage Code |
|-----------------------|-----------------------|--------------|-----------------------|-----------------------|--------------|
| V <sub>OUT1</sub> (V) | V <sub>OUT2</sub> (V) |              | V <sub>OUT1</sub> (V) | V <sub>OUT2</sub> (V) |              |
| 1.30                  | 2.80                  | 7M           | 1.20                  | 2.80                  | 5M           |
| 1.85                  | 1.85                  | bb           | 1.85                  | 1.50                  | b9           |
| 1.50                  | 1.50                  | 99           | 1.50                  | 2.80                  | 9M           |
| 1.80                  | 1.20                  | C5           | 1.80                  | 2.60                  | CK           |
| 2.50                  | 1.80                  | JC           | 1.80                  | 3.30                  | CR           |
| 2.50                  | 3.00                  | JO           | 2.50                  | 2.80                  | JM           |
| 2.80                  | 2.85                  | Ud           | 2.50                  | 3.30                  | JR           |
| 2.85                  | 2.85                  | dd           | 2.85                  | 1.85                  | db           |
| 2.80                  | 1.80                  | MC           | 2.85                  | 1.80                  | dC           |
| 2.80                  | 3.30                  | MR           | 2.80                  | 2.80                  | MM           |
| 2.80                  | 3.00                  | MO           | 3.00                  | 1.80                  | OC           |
| 3.30                  | 2.85                  | Rd           | 3.00                  | 3.00                  | OO           |
| 3.30                  | 3.30                  | RR           | 3.30                  | 3.00                  | RO           |
| 3.15                  | 2.80                  | eM           | 3.30                  | 3.10                  | RP           |

## Available Voltage Version

| Code    | 5    | 7    | 9    | A    | C    | b    | D    | E    | F    | J    | K    |
|---------|------|------|------|------|------|------|------|------|------|------|------|
| Voltage | 1.20 | 1.30 | 1.50 | 1.60 | 1.80 | 1.85 | 1.90 | 2.00 | 2.10 | 2.50 | 2.60 |
| Code    | c    | L    | M    | d    | N    | O    | P    | e    | Q    | R    |      |
| Voltage | 2.65 | 2.70 | 2.80 | 2.85 | 2.90 | 3.00 | 3.10 | 3.15 | 3.20 | 3.30 |      |

## Absolute Maximum Ratings (Note 1)

| Symbol                              | Parameter                                      | Rating    | Unit |
|-------------------------------------|------------------------------------------------|-----------|------|
| V <sub>IN</sub>                     | VIN Input Voltage (VIN to GND)                 | -0.3 ~ 7  | V    |
| V <sub>EN1</sub> , V <sub>EN2</sub> | EN1, EN2 to GND Voltage                        | -0.3 ~ 7  | V    |
| T <sub>J</sub>                      | Maximum Junction Temperature                   | 150       | °C   |
| T <sub>STG</sub>                    | Storage Temperature                            | -65 ~ 150 | °C   |
| T <sub>SDR</sub>                    | Maximum Lead Soldering Temperature, 10 Seconds | 260       | °C   |

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Thermal Characteristics

| Symbol        | Parameter                                                      | Typical Value | Unit |
|---------------|----------------------------------------------------------------|---------------|------|
| $\theta_{JA}$ | Junction-to-Ambient Resistance in Free Air <sup>(Note 2)</sup> |               |      |
|               | TSOT-23-6A                                                     | 220           | °C/W |
|               | TDFN1.6x1.6-6                                                  | 165           |      |

Note 2:  $\theta_{JA}$  is measured with the component mounted on a high effective thermal conductivity test board in free air.

## Recommended Operating Conditions (Note 3)

| Symbol             | Parameter                      | Range     | Unit |
|--------------------|--------------------------------|-----------|------|
| $V_{IN}$           | VIN Input Voltage (VIN to GND) | 2.5 ~ 5.5 | V    |
| $V_{EN1}, V_{EN2}$ | EN1, EN2 to GND Voltage        | 0 ~ 5.5   | V    |
| $I_{OUT}$          | VOOUT Output Current           | 0 ~ 300   | mA   |
| $T_A$              | Ambient Temperature            | -40 ~ 85  | °C   |
| $T_J$              | Junction Temperature           | -40 ~ 125 | °C   |

Note 3: Refer to the typical application circuit







## Electrical Characteristics

Unless otherwise specified, these specifications apply over  $V_{IN}=V_{OUT}+1V$ ,  $V_{EN1}=V_{EN2}=5V$  and  $T_A=-40$  to  $85$  °C. Typical values are at  $T_A=25$ °C.

| Symbol                                          | Parameter                           | Test Conditions                                      |          | APL5537 |      |      | Unit  |
|-------------------------------------------------|-------------------------------------|------------------------------------------------------|----------|---------|------|------|-------|
|                                                 |                                     |                                                      |          | Min.    | Typ. | Max. |       |
| UNDER-VOLTAGE LOCKOUT (UVLO) AND SUPPLY CURRENT |                                     |                                                      |          |         |      |      |       |
|                                                 | VIN UVLO Threshold Voltage          | VIN rising, TA= -40 to 85 °C                         |          | 1.9     | 2.2  | 2.45 | V     |
|                                                 | VIN UVLO Hysteresis                 |                                                      |          | -       | 0.1  | -    | V     |
| IQ                                              | VIN Supply Current                  | No load, VEN1= VEN2=5V                               |          | -       | 58   | 90   | μA    |
|                                                 |                                     | No load, VEN1= VEN2=0V                               |          | -       | -    | 1    | μA    |
| OUTPUT VOLTAGE (REGULATOR1 AND REGULATOR2)      |                                     |                                                      |          |         |      |      |       |
|                                                 | Output Voltage Accuracy             | IOUT=1mA to 300mA, TA= -40 °C to 85 °C               |          | -3.5    | -    | +3.5 | %     |
|                                                 | Line Regulation                     | IOUT=1mA, VIN=VOUT+0.3V to 5.5V, or VIN=2.5V to 5.5V |          | -       | -    | 0.2  | %/V   |
|                                                 | Load Regulation                     | IOUT=1mA to 300mA                                    |          | -       | -    | 0.6  | %     |
| VDROP                                           | Dropout Voltage <sup>(Note 4)</sup> | IOUT=300mA                                           |          | -       | 240  | 330  | mV    |
| PSRR                                            | Power Supply Rejection Ratio        | IOUT=50mA, COUT=2.2μF                                | f=100Hz  | -       | 70   | -    | dB    |
|                                                 |                                     |                                                      | f=1kHz   | -       | 70   | -    |       |
|                                                 |                                     |                                                      | f=10kHz  | -       | 60   | -    |       |
|                                                 |                                     |                                                      | f=100kHz | -       | 35   | -    |       |
|                                                 | Output Noise                        | IOUT=1mA, BW=10 to 100kHz, COUT=10μF                 |          | -       | 100  | -    | μVRMS |
|                                                 | VOUT Discharge Resistance           | VEN1= VEN2=0V                                        |          | -       | 0.7  | -    | kΩ    |
| ENABLE/DISABLE (EN1 AND EN2)                    |                                     |                                                      |          |         |      |      |       |
| VIH                                             | EN Input Logic HIGH                 | VIN=2.5V to 5.5V                                     |          | 1.5     | -    | -    | V     |
| VIL                                             | EN Input Logic LOW                  | VIN=2.5V to 5.5V                                     |          | -       | -    | 0.4  | V     |
|                                                 | EN Input Current                    | VEN1= VEN2=5V                                        |          | -       | 0.2  | -    | μA    |
| PROTECTIONS (REGULATOR1 AND REGULATOR2)         |                                     |                                                      |          |         |      |      |       |
| ILIMIT                                          | Current Limit Threshold             |                                                      |          | 330     | 450  | 750  | mA    |
| ISHORT                                          | Short-Circuit Output Current        |                                                      |          | -       | 50   | -    | mA    |
|                                                 | Over-Temperature Threshold          |                                                      |          | -       | 160  | -    | °C    |
|                                                 | Over-Temperature Hysteresis         |                                                      |          | -       | 40   | -    | °C    |
|                                                 | Soft-Start Time                     |                                                      |          | -       | 60   | -    | μs    |

Note 4: The dropout voltage is defined as  $V_{IN} - V_{OUT}$ , when  $V_{OUT}$  is 100mV below the value of  $V_{OUT}$  for  $V_{IN} = V_{OUT} + 1V$ .


## Typical Operating Characteristics

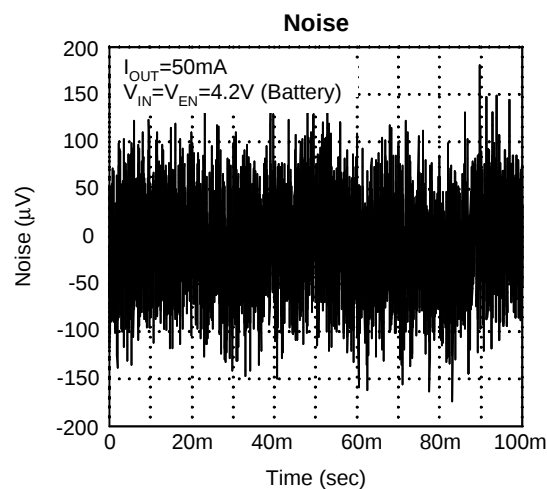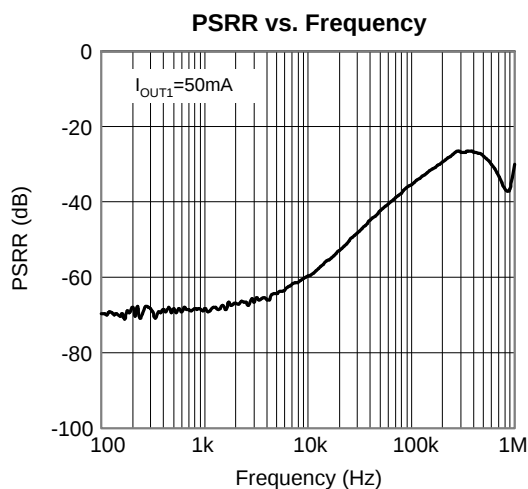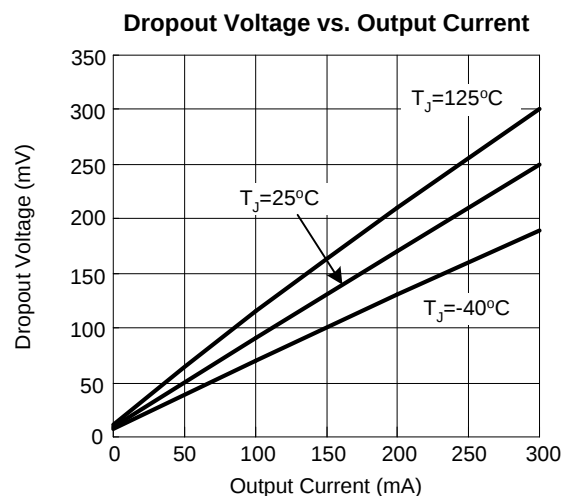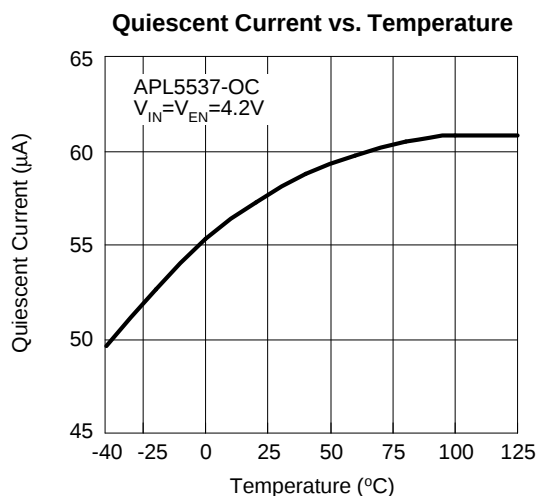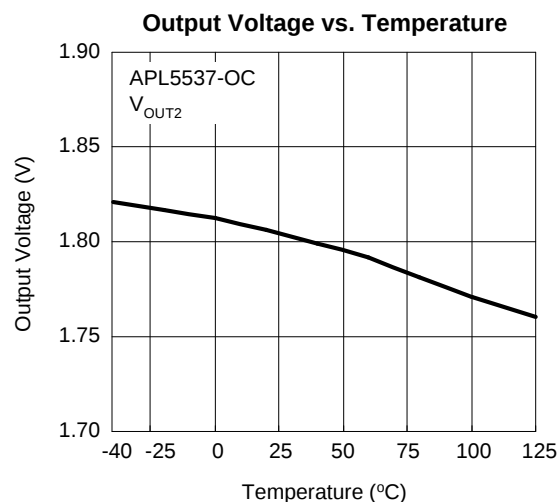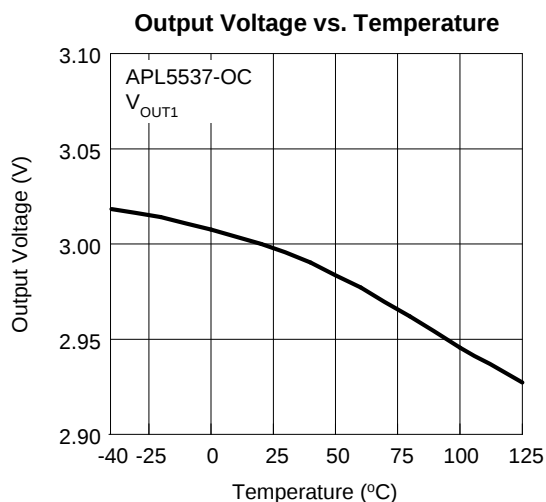

## Operating Waveforms


Refer to the typical application circuit. The test condition is  $V_{IN}=V_{EN}=4.2V$ ,  $T_A=25^{\circ}C$ . Unless otherwise specified.

Power on

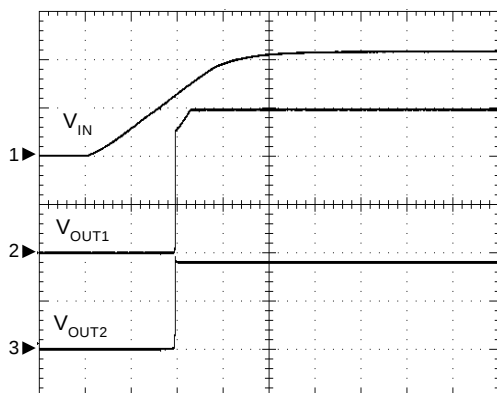


$C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=10mA$   
 CH1:  $V_{IN}$ , 2V/Div, DC  
 CH2:  $V_{OUT1}$ , 1V/Div, DC  
 CH3:  $V_{OUT2}$ , 1V/Div, DC  
 TIME: 4ms/Div

Power off

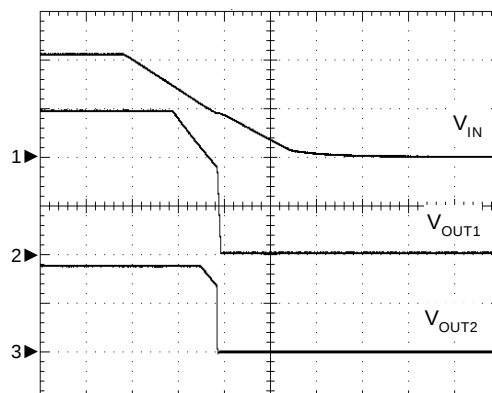


$C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=10mA$   
 CH1:  $V_{IN}$ , 2V/Div, DC  
 CH2:  $V_{OUT1}$ , 1V/Div, DC  
 CH3:  $V_{OUT2}$ , 1V/Div, DC  
 TIME: 4ms/Div

Enable Response

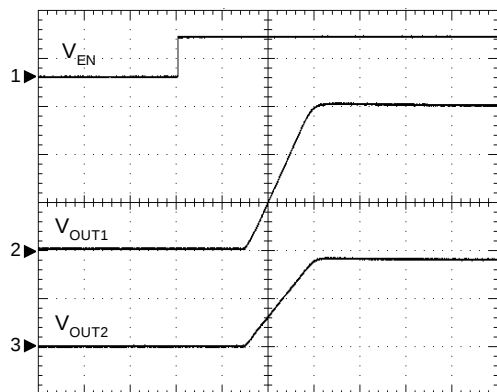

$C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=10mA$   
 CH1:  $V_{EN}$ , 5V/Div, DC  
 CH2:  $V_{OUT1}$ , 1V/Div, DC  
 CH3:  $V_{OUT2}$ , 1V/Div, DC  
 TIME: 40 $\mu s$ /Div

Disable Response

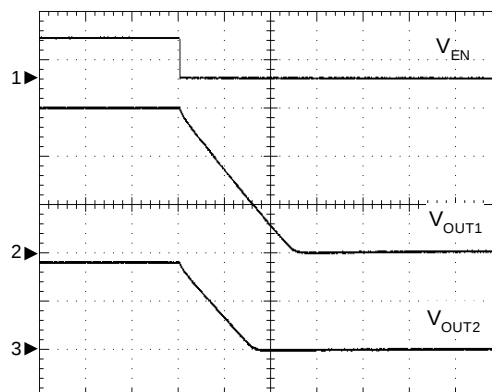


$C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=50mA$   
 CH1:  $V_{EN}$ , 5V/Div, DC  
 CH2:  $V_{OUT1}$ , 1V/Div, DC  
 CH3:  $V_{OUT2}$ , 1V/Div, DC  
 TIME: 40 $\mu s$ /Div

## Operating Waveforms (Cont.)


Refer to the typical application circuit. The test condition is  $V_{IN}=V_{EN}=4.2V$ ,  $T_A=25^\circ C$ . Unless otherwise specified.

### Line Transient Response

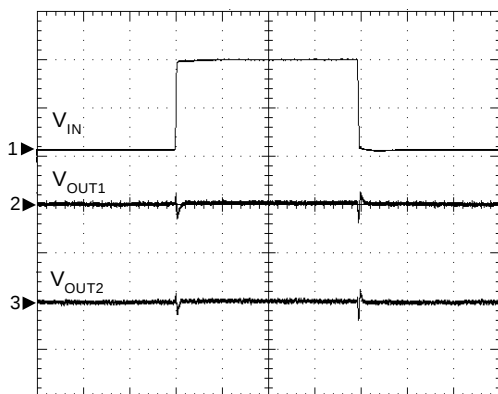


$V_{IN}=3.8V$  to  $4.8V$  to  $3.8V$  (rise / fall time =  $4\mu s$ )  
 $C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=10mA$   
 CH1:  $V_{IN}$ , 500mV/Div, DC, Offset=3.8V  
 CH2:  $V_{OUT1}$ , 20mV/Div, DC, Offset=3.0V  
 CH3:  $V_{OUT2}$ , 20mV/Div, DC, Offset=1.8V  
 TIME:100 $\mu s$ /Div

### Line Transient Response

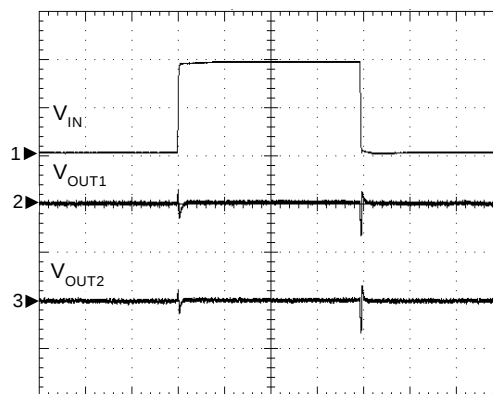


$V_{IN}=3.8V$  to  $4.8V$  to  $3.8V$  (rise / fall time =  $4\mu s$ )  
 $C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=50mA$   
 CH1:  $V_{IN}$ , 500mV/Div, DC, Offset=3.8V  
 CH2:  $V_{OUT1}$ , 20mV/Div, DC, Offset=3.0V  
 CH3:  $V_{OUT2}$ , 20mV/Div, DC, Offset=1.8V  
 TIME:100 $\mu s$ /Div

### Line Transient Response

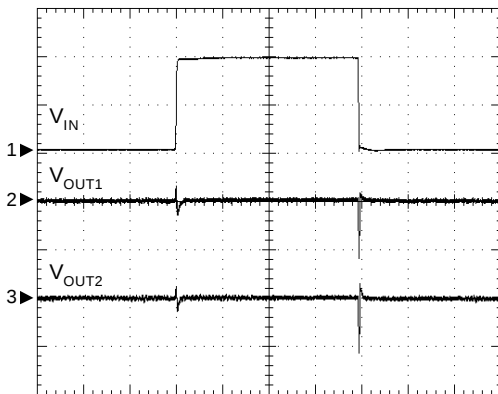

$V_{IN}=3.8V$  to  $4.8V$  to  $3.8V$  (rise / fall time =  $4\mu s$ )  
 $C_{IN}=C_{OUT}=1\mu F$ ,  $I_{OUT1}=I_{OUT2}=100mA$   
 CH1:  $V_{IN}$ , 500mV/Div, DC, Offset=3.8V  
 CH2:  $V_{OUT1}$ , 20mV/Div, DC, Offset=3.0V  
 CH3:  $V_{OUT2}$ , 20mV/Div, DC, Offset=1.8V  
 TIME:100 $\mu s$ /Div

### Load Transient Response

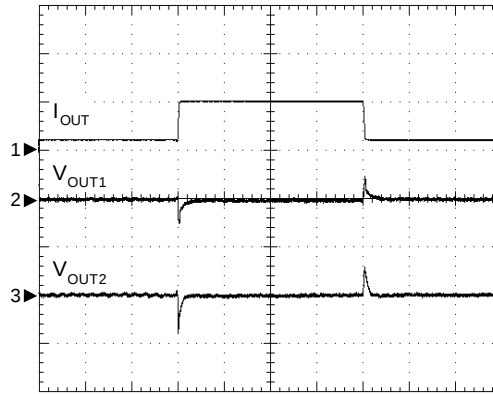


$I_{OUT}=10mA$  to  $50mA$  to  $10mA$  (rise / fall time =  $1\mu s$ )  
 $C_{IN}=C_{OUT}=1\mu F$ ,  $V_{IN}=V_{EN}=4.2V$   
 CH1:  $I_{OUT}$ , 50mA/Div, DC  
 CH2:  $V_{OUT1}$ , 20mV/Div, DC, Offset=3.0V  
 CH3:  $V_{OUT2}$ , 20mV/Div, DC, Offset=1.8V  
 TIME:40 $\mu s$ /Div

## Operating Waveforms (Cont.)


Refer to the typical application circuit. The test condition is  $V_{IN}=V_{EN}=4.2V$ ,  $T_A=25^{\circ}C$ . Unless otherwise specified.

Load Transient Response

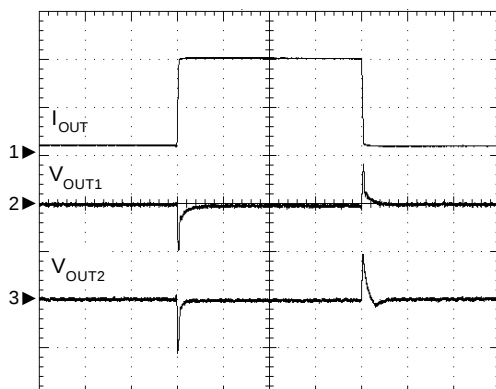

$I_{OUT}=10mA$  to  $100mA$  to  $10mA$  (rise / fall time =  $1\mu s$ )  
 $C_{IN}=C_{OUT}=1\mu F$ ,  $V_{IN}=V_{EN}=4.2V$   
 CH1:  $I_{OUT}$ , 50mA/Div, DC  
 CH2:  $V_{OUT1}$ , 20mV/Div, DC, Offset=3.0V  
 CH3:  $V_{OUT2}$ , 20mV/Div, DC, Offset=1.8V  
 TIME:40 $\mu s$ /Div

Load Transient Response

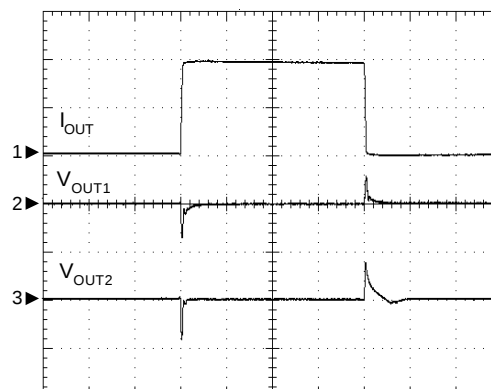


$I_{OUT}=10mA$  to  $200mA$  to  $10mA$  (rise / fall time =  $1\mu s$ )  
 $C_{IN}=C_{OUT}=1\mu F$ ,  $V_{IN}=V_{EN}=4.2V$   
 CH1:  $I_{OUT}$ , 100mA/Div, DC  
 CH2:  $V_{OUT1}$ , 50mV/Div, DC, Offset=3.0V  
 CH3:  $V_{OUT2}$ , 50mV/Div, DC, Offset=1.8V  
 TIME:40 $\mu s$ /Div


## Pin Description

| PIN        |               |       | FUNCTION                                                                                                                                                           |
|------------|---------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NO.        |               | NAME  |                                                                                                                                                                    |
| TSOT-23-6A | TDFN1.6x1.6-6 |       |                                                                                                                                                                    |
| 5          | 1             | VIN   | Input Supply Pin. $V_{IN}$ can range from 2.5V to 5.5V and should be bypassed with at least a $1\mu\text{F}$ capacitor.                                            |
| 4          | 2             | EN1   | Enable Input. Pulling the $V_{EN1/2}$ above 1.5V enables the respective regulator output; pulling $V_{EN1/2}$ below 0.4V disables the respective regulator output. |
| 3          | 3             | EN2   |                                                                                                                                                                    |
| 2          | 4             | GND   | Ground.                                                                                                                                                            |
| 1          | 5             | VOUT2 | Regulator Outputs. Sources up to 300mA. Bypass with at least a $1\mu\text{F}$ capacitor to the GND respectively.                                                   |
| 6          | 6             | VOUT1 |                                                                                                                                                                    |
| -          | -             | EP    | Exposed Pad. Connect it to a large ground plane for heatsinking.                                                                                                   |

## Block Diagram

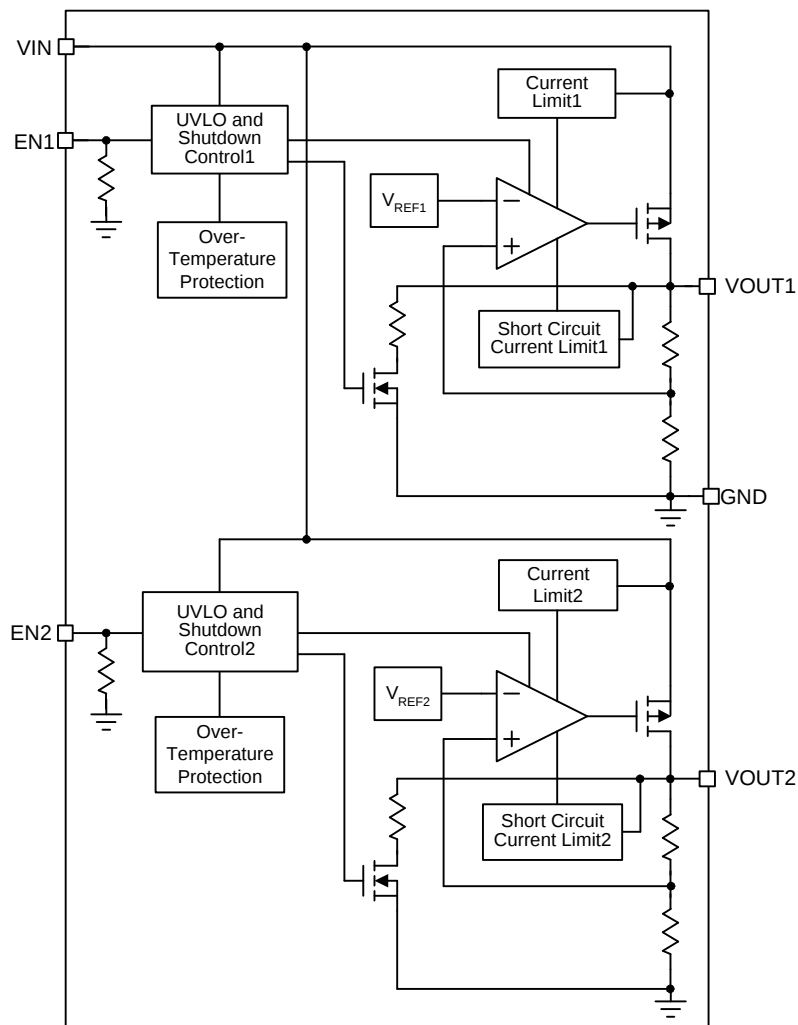

## Typical Application Circuit

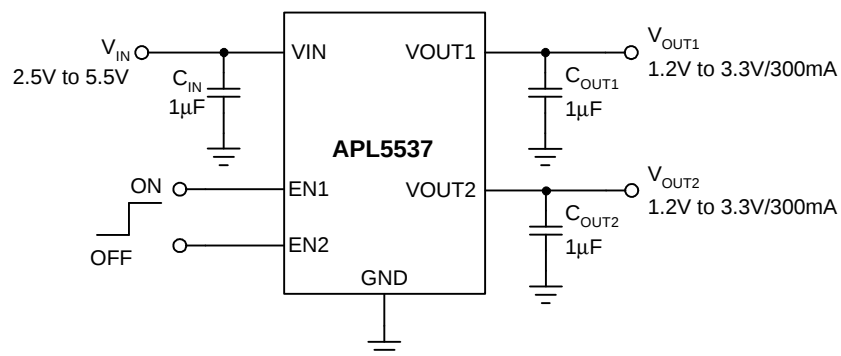

## Function Description

### VIN Under-Voltage Lockout (UVLO)

The APL5537 has a built-in under-voltage lockout circuit to keep the outputs shutting off until internal circuitry is operating properly. The UVLO circuit has a hysteresis and a de-glitch feature so that it will typically ignore undershoot transients on the input.

### Soft-Start (For Each Channel)

The APL5537 provides an internal soft-start circuitry to control rise rate of the output voltage and limit the current surge during start-up. The output voltage starts the soft-start at approximate 60 $\mu$ s after the VIN is over the UVLO threshold. The typical soft-start interval is about 60 $\mu$ s.

### Current-Limit Protection (For Each Channel)

The APL5537 provides a current-limit protection function. During current limit, the device limits output current at current limit threshold. For reliable operation, the device should not be operated in current limit for extended period.

### Short-Circuit Current-Limit Protection (For Each Channel)

When the output voltage drops below 0.8V, which is caused by the over load or short circuit, the device limits the output current down to a safe level. The short circuit current limit is used to reduce the power dissipation during short circuit conditions. If the junction temperature is over the over-temperature threshold, the device will enter the thermal shutdown.

### Enable/Disable (For Each Channel)

Pulling the  $V_{EN1/2}$  above 1.5V enables the respective LDO output, and pulling  $V_{EN1/2}$  below 0.4V disables the respective LDO output. When both the LDO outputs are disabled, the supply current is reduced to less than 1 $\mu$ A. EN1/2 pins are internally pulled low by resistors. If shutdown function is not used, connect EN1/2 to VIN for normal operation. The enable inputs are compatible with both TTL and CMOS logic levels.

### Over-Temperature Protection

An over-temperature protection circuitry limits the junction temperature of APL5537. When the junction temperature exceeds +160°C, the over-temperature protection circuitry disables the LDO outputs, allowing the device to cool down. The LDO outputs are enabled again after the junction temperature cools down by 40°C, resulting in a pulsed output during continuous thermal overload conditions. Over-temperature protection is designed to protect the IC in the event of over temperature conditions. For reliable operation, the junction temperature cannot exceed  $T_j=+125^{\circ}\text{C}$

## Application Information

### Input Capacitor

The APL5537 requires proper input capacitors to supply surge current during stepping load transients to prevent the input rail from dropping. Because the parasitic inductor from the voltage sources or other bulk capacitors to the VIN limit the slew rate of the surge current, place the Input capacitors near VIN as close as possible. Input capacitors should be larger than 1μF and a minimum ceramic capacitor of 1μF is necessary.

### Output Capacitor

The APL5537 needs a proper output capacitor to maintain circuit stability and improve transient response over temperature and current. In order to insure the circuit stability, the proper output capacitor value should be larger than 1μF. With X5R and X7R dielectrics, 1μF is sufficient at all operating temperatures. Large output capacitor value can reduce noise and improve load-transient response and PSRR, Figure 1 shows the curves of allowable ESR range as the function of load current for various output capacitor values.

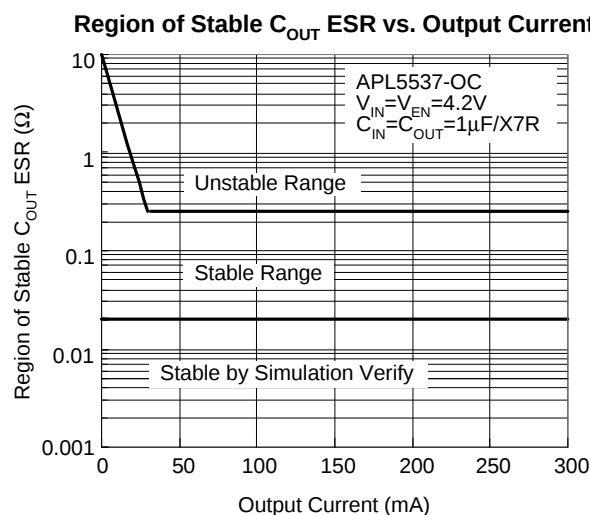


Figure1. Stable  $C_{OUT}$  ESR Range

### Operation Region and Power Dissipation

The APL5537 maximum power dissipation depends on the thermal resistance and temperature difference between the die junction and ambient air. The TDFN1.6x1.6 package power dissipation  $P_D$  across the device is:

$$P_D = (T_J - T_A) / \theta_{JA}$$

where  $(T_J - T_A)$  is the temperature difference between the junction and ambient air.  $\theta_{JA}$  is the thermal resistance between Junction and ambient air. Assuming the  $T_A = 25^\circ\text{C}$  and maximum  $T_J = 160^\circ\text{C}$  (typical thermal limit threshold), the maximum power dissipation is calculated as:

$$P_D(\text{max}) = (160 - 25) / 165 = 0.82(\text{W})$$

For normal operation, do not exceed the maximum junction temperature rating of  $T_J = 125^\circ\text{C}$ . The calculated power dissipation should be less than:

$$P_D = (125 - 25) / 165 = 0.61(\text{W})$$

The GND provides an electrical connection to the ground and channels heat away. Connect the GND to the ground by using a large pad or a ground plane.

### Layout Consideration

Figure 2 illustrates the layout. Below is a checklist for your layout:

1. Please place the input capacitors close to the VIN.
2. Ceramic capacitors for load must be placed near the load as close as possible.
3. To place APL5537 and output capacitors near the load is good for performance.
4. Large current paths, the bold lines in figure 2, must have wide tracks.


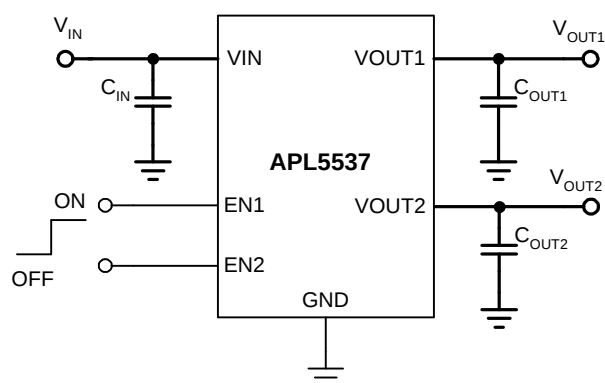


Figure2. Large Current Paths

## Package Information

### TSOT-23-6A

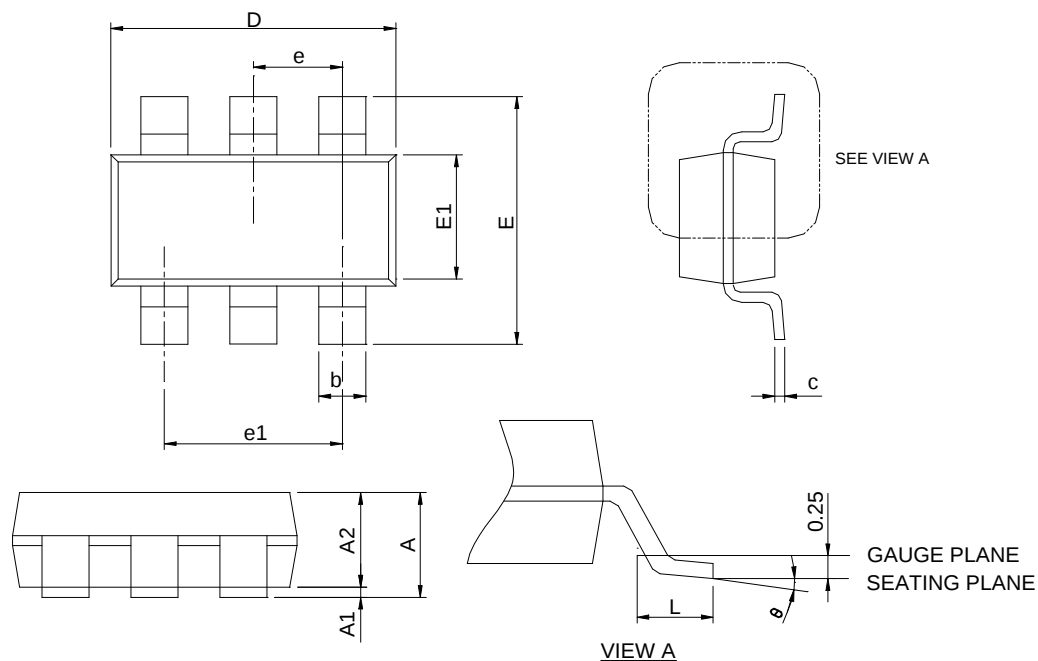


| SYMBOL | TSOT-23-6A  |      |           |       |
|--------|-------------|------|-----------|-------|
|        | MILLIMETERS |      | INCHES    |       |
|        | MIN.        | MAX. | MIN.      | MAX.  |
| A      | 0.70        | 1.00 | 0.028     | 0.039 |
| A1     | 0.01        | 0.10 | 0.000     | 0.004 |
| A2     | 0.70        | 0.90 | 0.028     | 0.035 |
| b      | 0.30        | 0.50 | 0.012     | 0.020 |
| c      | 0.08        | 0.20 | 0.003     | 0.008 |
| D      | 2.70        | 3.10 | 0.106     | 0.122 |
| E      | 2.60        | 3.00 | 0.102     | 0.118 |
| E1     | 1.40        | 1.80 | 0.055     | 0.071 |
| e      | 0.95 BSC    |      | 0.037 BSC |       |
| e1     | 1.90 BSC    |      | 0.075 BSC |       |
| L      | 0.30        | 0.60 | 0.012     | 0.024 |
| θ      | 0°          | 8°   | 0°        | 8°    |

Note : Dimension D and E1 do not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 10 mil per side.


## Package Information

TDFN1.6x1.6-6

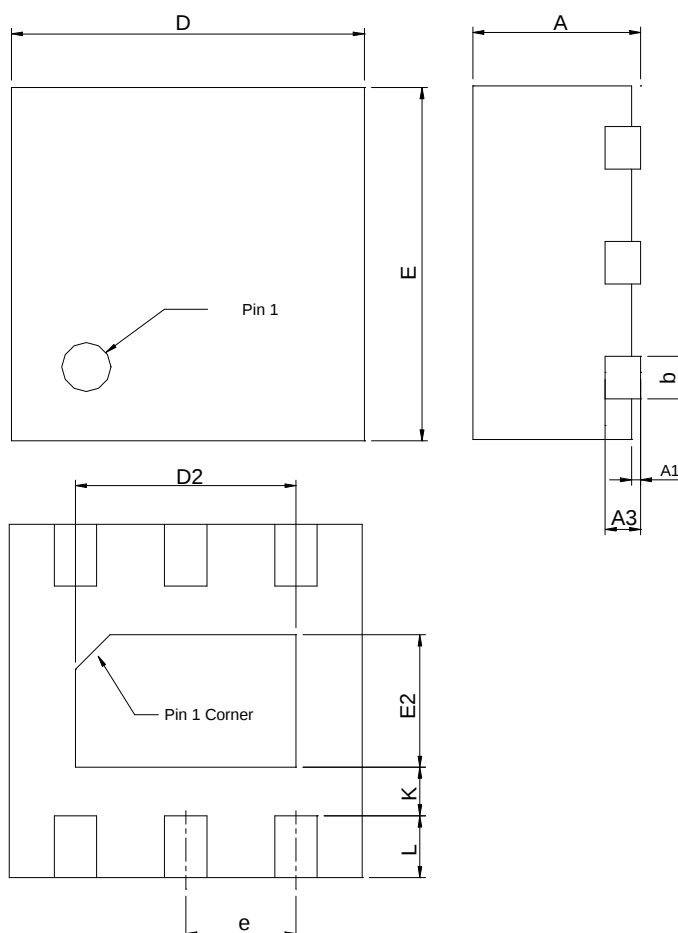

| SYMBOL | TDFN1.6x1.6-6 |      |           |       |
|--------|---------------|------|-----------|-------|
|        | MILLIMETERS   |      | INCHES    |       |
|        | MIN.          | MAX. | MIN.      | MAX.  |
| A      | 0.70          | 0.80 | 0.028     | 0.031 |
| A1     | 0.00          | 0.05 | 0.000     | 0.002 |
| A3     | 0.20 REF      |      | 0.008 REF |       |
| b      | 0.20          | 0.30 | 0.008     | 0.012 |
| D      | 1.55          | 1.65 | 0.061     | 0.065 |
| D2     | 0.95          | 1.05 | 0.037     | 0.041 |
| E      | 1.55          | 1.65 | 0.061     | 0.065 |
| E2     | 0.55          | 0.65 | 0.022     | 0.026 |
| e      | 0.50 BSC      |      | 0.020 BSC |       |
| K      | 0.20          | -    | 0.008     | -     |
| L      | 0.19          | 0.29 | 0.007     | 0.011 |

## Carrier Tape & Reel Dimensions

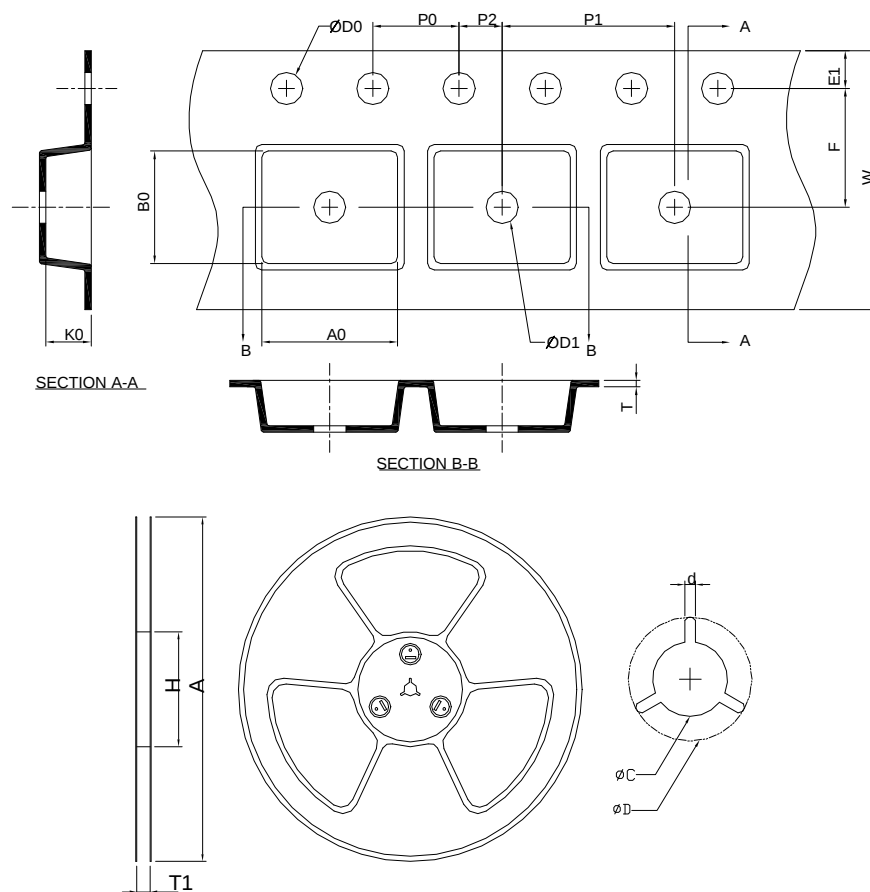

| Application   | A           | H         | T1                | C                  | d        | D                 | W          | E1         | F          |
|---------------|-------------|-----------|-------------------|--------------------|----------|-------------------|------------|------------|------------|
| TSOT-23-6A    | 178.0 ±0.00 | 50 MIN.   | 8.4+2.00<br>-0.00 | 13.0+0.50<br>-0.20 | 1.5 MIN. | 20.2 MIN.         | 8.0 ±0.30  | 1.75 ±0.10 | 3.5 ±0.05  |
|               | P0          | P1        | P2                | D0                 | D1       | T                 | A0         | B0         | K0         |
|               | 4.0 ±0.10   | 4.0 ±0.10 | 2.0 ±0.05         | 1.5+0.10<br>-0.00  | 1.0 MIN. | 0.6+0.00<br>-0.40 | 3.20 ±0.20 | 3.10 ±0.20 | 1.50 ±0.20 |
| Application   | A           | H         | T1                | C                  | d        | D                 | W          | E1         | F          |
| TDFN1.6x1.6-6 | 178.0 ±0.00 | 50 MIN.   | 8.4+2.00<br>-0.00 | 13.0+0.50<br>-0.20 | 1.5 MIN. | 20.2 MIN.         | 8.0 ±0.30  | 1.75 ±0.10 | 3.5 ±0.05  |
|               | P0          | P1        | P2                | D0                 | D1       | T                 | A0         | B0         | K0         |
|               | 4.0 ±0.10   | 4.0 ±0.10 | 2.0 ±0.05         | 1.5+0.10<br>-0.00  | 1.5 MIN. | 0.6+0.00<br>-0.40 | 1.70 ±0.20 | 1.70 ±0.20 | 0.90 ±0.20 |


(mm)

## Devices Per Unit


| Package Type  | Unit        | Quantity |
|---------------|-------------|----------|
| TSOT-23-6A    | Tape & Reel | 3000     |
| TDFN1.6x1.6-6 | Tape & Reel | 3000     |

## Taping Direction Information


### TSOT-23-6A

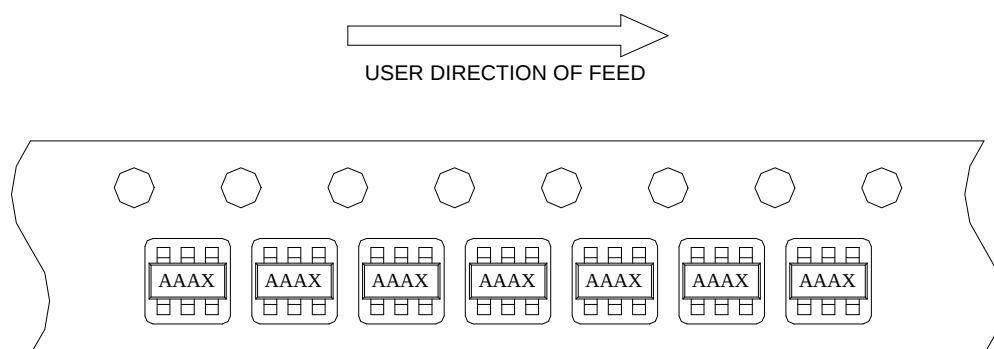

### TDFN1.6x1.6-6

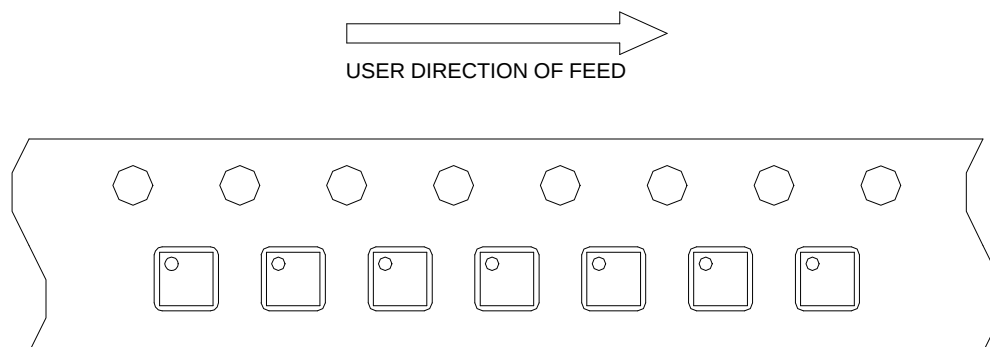

## Classification Profile

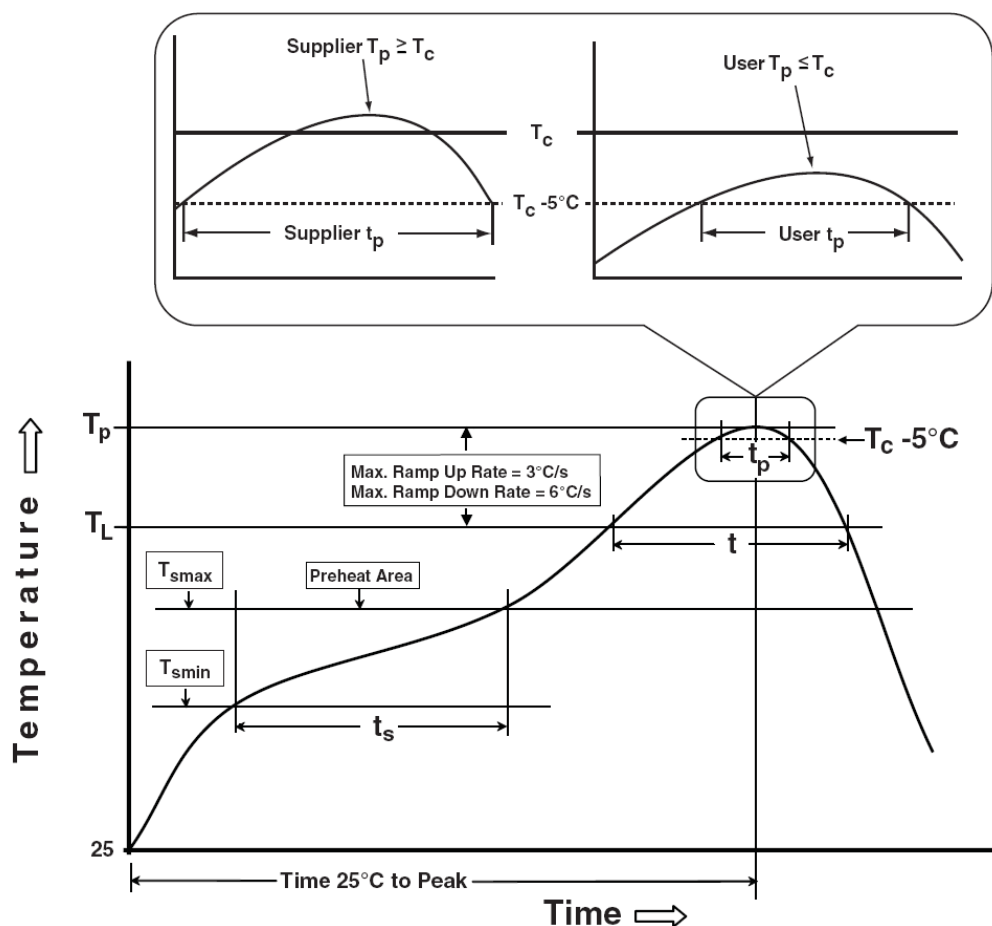

## Classification Reflow Profiles

| Profile Feature                                                                                                  | Sn-Pb Eutectic Assembly            | Pb-Free Assembly                   |
|------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|
| <b>Preheat &amp; Soak</b>                                                                                        |                                    |                                    |
| Temperature min ( $T_{smin}$ )                                                                                   | 100 °C                             | 150 °C                             |
| Temperature max ( $T_{smax}$ )                                                                                   | 150 °C                             | 200 °C                             |
| Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )                                                                      | 60-120 seconds                     | 60-120 seconds                     |
| Average ramp-up rate ( $T_{smax}$ to $T_p$ )                                                                     | 3 °C/second max.                   | 3°C/second max.                    |
| Liquidous temperature ( $T_L$ )                                                                                  | 183 °C                             | 217 °C                             |
| Time at liquidous ( $t_L$ )                                                                                      | 60-150 seconds                     | 60-150 seconds                     |
| Peak package body Temperature ( $T_p$ )*                                                                         | See Classification Temp in table 1 | See Classification Temp in table 2 |
| Time ( $t_p$ )** within $5^\circ\text{C}$ of the specified classification temperature ( $T_c$ )                  | 20** seconds                       | 30** seconds                       |
| Average ramp-down rate ( $T_p$ to $T_{smax}$ )                                                                   | 6 °C/second max.                   | 6 °C/second max.                   |
| Time $25^\circ\text{C}$ to peak temperature                                                                      | 6 minutes max.                     | 8 minutes max.                     |
| * Tolerance for peak profile Temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.          |                                    |                                    |
| ** Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum. |                                    |                                    |

## Classification Reflow Profiles (Cont.)

Table 1. SnPb Eutectic Process – Classification Temperatures (Tc)

| Package Thickness | Volume mm <sup>3</sup><br><350 | Volume mm <sup>3</sup><br>≥350 |
|-------------------|--------------------------------|--------------------------------|
| <2.5 mm           | 235 °C                         | 220 °C                         |
| ≥2.5 mm           | 220 °C                         | 220 °C                         |

Table 2. Pb-free Process – Classification Temperatures (Tc)

| Package Thickness | Volume mm <sup>3</sup><br><350 | Volume mm <sup>3</sup><br>350-2000 | Volume mm <sup>3</sup><br>>2000 |
|-------------------|--------------------------------|------------------------------------|---------------------------------|
| <1.6 mm           | 260 °C                         | 260 °C                             | 260 °C                          |
| 1.6 mm – 2.5 mm   | 260 °C                         | 250 °C                             | 245 °C                          |
| ≥2.5 mm           | 250 °C                         | 245 °C                             | 245 °C                          |

## Reliability Test Program

| Test item     | Method             | Description                            |
|---------------|--------------------|----------------------------------------|
| SOLDERABILITY | JESD-22, B102      | 5 Sec, 245°C                           |
| HOLT          | JESD-22, A108      | 1000 Hrs, Bias @ T <sub>j</sub> =125°C |
| PCT           | JESD-22, A102      | 168 Hrs, 100%RH, 2atm, 121°C           |
| TCT           | JESD-22, A104      | 500 Cycles, -65°C~150°C                |
| HBM           | MIL-STD-883-3015.7 | VHBM 2KV                               |
| MM            | JESD-22, A115      | VMM 200V                               |
| Latch-Up      | JESD 78            | 10ms, 1 <sub>tr</sub> 100mA            |

## Customer Service

### Anpec Electronics Corp.

Head Office :

No.6, Dusing 1st Road, SBIP,  
Hsin-Chu, Taiwan, R.O.C.  
Tel : 886-3-5642000  
Fax : 886-3-5642050

Taipei Branch :

2F, No. 11, Lane 218, Sec 2 Jhongsing Rd.,  
Sindian City, Taipei County 23146, Taiwan  
Tel : 886-2-2910-3838  
Fax : 886-2-2917-3838