



**Input rectifier bridge + Brake
+ 3 Phase Bridge
Trench IGBT® Power Module**

**$V_{CES} = 1200V$
 $I_C = 75A @ T_c = 80^\circ C$**

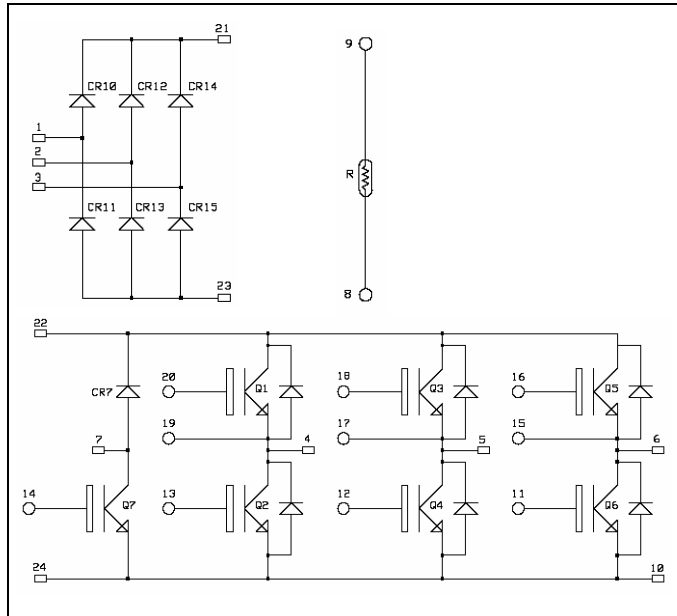

APTGT75X120RTP3: Without Brake (Pin 7 & 14 not connected)

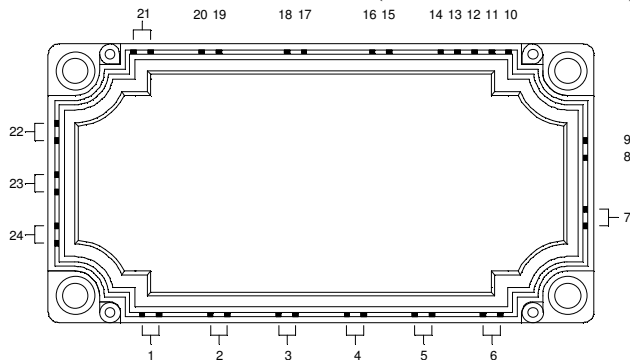

Application

- AC Motor control

Features

- Trench + Field Stop IGBT® Technology
 - Low voltage drop
 - Low tail current
 - Switching frequency up to 20 kHz
 - Soft recovery parallel diodes
 - Low diode VF
 - Low leakage current
 - Avalanche energy rated
 - RBSOA and SCSOA rated
- Kelvin emitter for easy drive
- Very low stray inductance
- High level of integration
- Internal thermistor for temperature monitoring

Benefits

- Low conduction losses
- Stable temperature behavior
- Very rugged
- Solderable terminals for easy PCB mounting
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive TC of VCEsat
- Low profile

All ratings @ $T_j = 25^\circ C$ unless otherwise specified

1. Absolute maximum ratings

Diode rectifier Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	1600	V
I_D	DC Forward Current	$T_C = 80^\circ C$ 80	A
I_{FSM}	Surge Forward Current	$T_j = 25^\circ C$ 500	
		$T_j = 150^\circ C$ 400	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

IGBT & Diode Brake (only for APTGT75X120BTP3) Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit
V_{CES}	Collector - Emitter Breakdown Voltage	1200	V
I_C	Continuous Collector Current	$T_C = 25^\circ\text{C}$ 60	A
		$T_C = 80^\circ\text{C}$ 50	
I_{CM}	Pulsed Collector Current	$T_C = 25^\circ\text{C}$ 100	
V_{GE}	Gate – Emitter Voltage	± 20	V
P_D	Maximum Power Dissipation	$T_C = 25^\circ\text{C}$ 200	W
I_F	DC Forward Current	$T_C = 80^\circ\text{C}$ 25	A

IGBT & Diode Inverter Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit
V_{CES}	Collector - Emitter Breakdown Voltage	1200	V
I_C	Continuous Collector Current	$T_C = 25^\circ\text{C}$ 105	A
		$T_C = 80^\circ\text{C}$ 75	
I_{CM}	Pulsed Collector Current	$T_C = 25^\circ\text{C}$ 150	
V_{GE}	Gate – Emitter Voltage	± 20	V
P_D	Maximum Power Dissipation	$T_C = 25^\circ\text{C}$ 350	W
RBSOA	Reverse Bias Safe Operating Area	$T_j = 125^\circ\text{C}$ 150A @ 1100V	
I_F	DC Forward Current	$T_C = 80^\circ\text{C}$ 75	A
I_{FRM}	Repetitive Peak Forward Current	$t_p = 1\text{ms}$ 150	

2. Electrical Characteristics

Diodes Rectifier Electrical Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
I_R	Reverse Current	$V_R = 1600\text{V}$ $T_j = 150^\circ\text{C}$		3		mA
V_F	Forward Voltage	$I_F = 75\text{A}$ $T_j = 150^\circ\text{C}$		1.2		V
R_{thJC}	Junction to Case				0.65	$^\circ\text{C/W}$

IGBT Brake & Diode (only for APTGT75X120BTP3) Electrical Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
I_{CES}	Zero Gate Voltage Collector Current	$V_{GE} = 0\text{V}$, $V_{CE} = 1200\text{V}$		400		μA
$V_{CE(on)}$	Collector Emitter on Voltage	$V_{GE} = 15\text{V}$ $T_j = 25^\circ\text{C}$ $I_C = 50\text{A}$	1.4	1.7	2.1	V
		$T_j = 125^\circ\text{C}$		2.0		
$V_{GE(th)}$	Gate Threshold Voltage	$V_{GE} = V_{CE}$, $I_C = 2\text{mA}$	5.0	5.8	6.5	V
I_{GES}	Gate – Emitter Leakage Current	$V_{GE} = 20\text{V}$, $V_{CE} = 0\text{V}$			600	nA
C_{ies}	Input Capacitance	$V_{GE} = 0\text{V}$		3600		pF
C_{oes}	Output Capacitance	$V_{CE} = 25\text{V}$		188		
C_{res}	Reverse Transfer Capacitance	$f = 1\text{MHz}$		163		
V_F	Forward Voltage	$V_{GE} = 0\text{V}$ $T_j = 25^\circ\text{C}$ $I_F = 25\text{A}$		1.6		V
		$T_j = 125^\circ\text{C}$		1.8		
R_{thJC}	Junction to Case	IGBT			0.6	$^\circ\text{C/W}$
		Diode			1.2	

IGBT & Diode Inverter Electrical Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
BV _{CES}	Collector - Emitter Breakdown Voltage	V _{GE} = 0V, I _C = 500μA	1200			V
I _{CES}	Zero Gate Voltage Collector Current	V _{GE} = 0V, V _{CE} = 1200V		4		mA
V _{CE(on)}	Collector Emitter on Voltage	V _{GE} = 15V I _C = 75A		1.7 2.0	2.1	V
		T _j = 25°C T _j = 125°C				
V _{GE(th)}	Gate Threshold Voltage	V _{GE} = V _{CE} , I _C = 3 mA	5.0	5.8	6.5	V
I _{GES}	Gate – Emitter Leakage Current	V _{GE} = 20V, V _{CE} = 0V			500	nA
C _{ies}	Input Capacitance	V _{GE} = 0V		5345		pF
C _{oss}	Output Capacitance	V _{CE} = 25V		280		
C _{rss}	Reverse Transfer Capacitance	f = 1MHz		242		
T _{d(on)}	Turn-on Delay Time	Inductive Switching (25°C)		260		ns
T _r	Rise Time	V _{GE} = ±15V		30		
T _{d(off)}	Turn-off Delay Time	V _{Bus} = 600V		420		
T _f	Fall Time	I _C = 75A R _G = 4.7Ω		65		
T _{d(on)}	Turn-on Delay Time	Inductive Switching (125°C)		285		ns
T _r	Rise Time	V _{GE} = ±15V		45		
T _{d(off)}	Turn-off Delay Time	V _{Bus} = 600V		520		
T _f	Fall Time	I _C = 75A		90		
E _{off}	Turn off Energy	R _G = 4.7Ω		9.4		
V _F	Forward Voltage	V _{GE} = 0V I _F = 75A		1.6 1.6	2.2	V
		T _j = 25°C T _j = 125°C				
Q _{rr}	Reverse Recovery Charge	I _F = 75A V _R = 600V di/dt=825A/μs		8 14		μC
		T _j = 25°C T _j = 125°C				
R _{thJC}	Junction to Case				0.35 0.58	°C/W
		IGBT Diode				

Temperature sensor NTC

Symbol	Characteristic	Min	Typ	Max	Unit
R ₂₅	Resistance @ 25°C		5		kΩ
B _{25/50}	T ₂₅ = 298.16 K		3375		K


$$R_T = \frac{R_{25}}{\exp \left[B_{25/50} \left(\frac{1}{T_{25}} - \frac{1}{T} \right) \right]}$$

T: Thermistor temperature
R_T: Thermistor value at T

3. Thermal and package characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
V _{ISOL}	RMS Isolation Voltage, any terminal to case t = 1 min, I _{isol} < 1mA, 50/60Hz	2500			V
T _J	Operating junction temperature range	-40		150	°C
T _{STG}	Storage Temperature Range	-40		125	
T _C	Operating Case Temperature	-40		125	
Torque	Mounting torque	To Heatsink	M5	3.3	N.m
Wt	Package Weight			300	g

4. Package outline

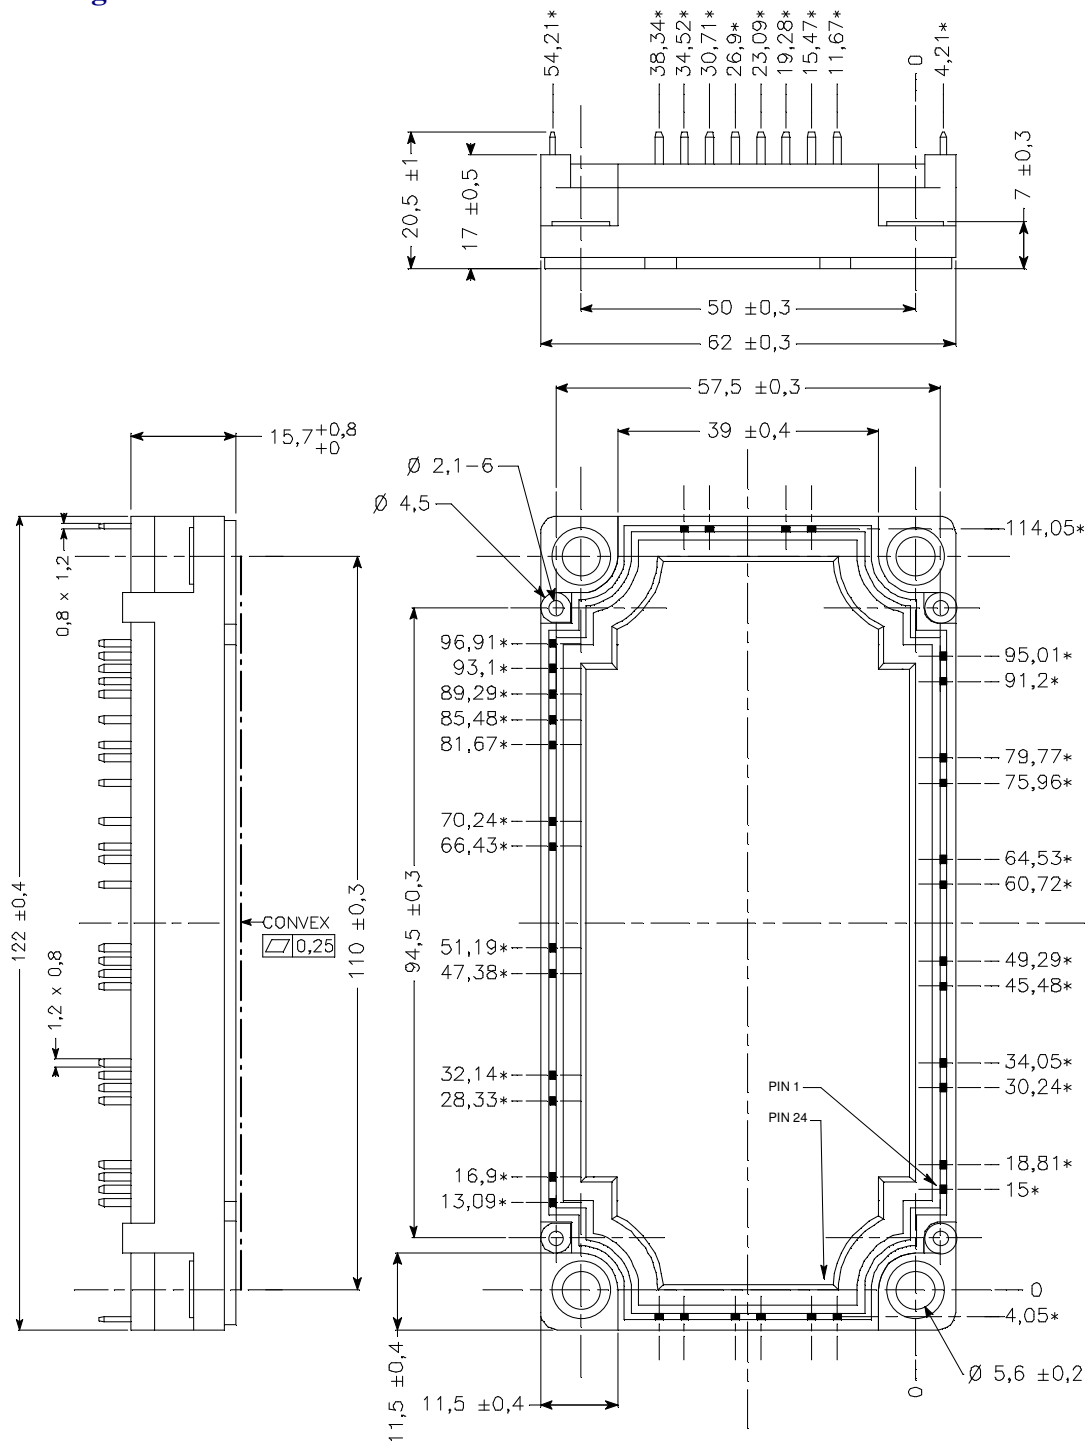

ALL DIMENSIONS MARKED " * " ARE TOLERENCED AS : ± 0.4

APT reserves the right to change, without notice, the specifications and information contained herein

APT's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.