



**DIP8-pin type
featuring low on-resistance
with 400V load voltage**

**PhotoMOS®
HE 2 Form A
(AQW254)**

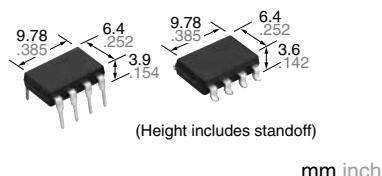

RoHS compliant

FEATURES

1. High sensitivity and low on-resistance

Can control max. 0.16 A load current with 5 mA input current. Low on-resistance of Typ. 10.2Ω. (in case of using only 1 channel)

2. Applicable for 2 Form A use as well as two independent 1 Form A use

3. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. Low-level off state leakage current of max. 1 μA

TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment

TYPES

| | Output rating* | | Package | Part No. | | | | Packing quantity | |
|----------------|----------------|--------------|----------|-----------------------|------------------------|----------------------------------|----------------------------------|--|---------------|
| | | | | Through hole terminal | Surface-mount terminal | | | | |
| | Load voltage | Load current | | Tube packing style | | Tape and reel packing style | | Tube | Tape and reel |
| | | | | | | Picked from the 1/2/3/4-pin side | Picked from the 5/6/7/8-pin side | | |
| AC/DC dual use | 400 V | 120 mA | DIP8-pin | AQW254 | AQW254A | AQW254AX | AQW254AZ | 1 tube contains: 50 pcs. 1 batch contains: 500 pcs. | 1,000 pcs |

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQW254(A) | Remarks |
|-------------------------|-------------------------|------------|-----------------------------|---|
| Input | LED forward current | I_F | 50 mA | |
| | LED reverse voltage | V_R | 5 V | |
| | Peak forward current | I_{FP} | 1 A | $f = 100 \text{ Hz}$, Duty factor = 0.1% |
| | Power dissipation | P_{in} | 75 mW | |
| Output | Load voltage (peak AC) | V_L | 400 V | |
| | Continuous load current | I_L | 0.12 A (0.16 A) | A connection: Peak AC, DC (): in case of using only 1 channel |
| | Peak load current | I_{peak} | 0.36 A | 100 ms (1 shot), $V_L = \text{DC}$ |
| | Power dissipation | P_{out} | 800 mW | |
| Total power dissipation | | P_T | 850 mW | |
| I/O isolation voltage | | V_{iso} | 1,500 Vrms | |
| Ambient temperature | Operating | T_{opr} | -40 to +85°C -40 to +185°F | (Non-icing at low temperatures) |
| | Storage | T_{stg} | -40 to +100°C -40 to +212°F | |

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | | Symbol | AQW254(A) | Condition |
|----------------------------------|---------------------------|------------------|-------------------|--|--|
| Input | LED operate current | Typical | I _{Fon} | 0.9 mA | I _L = Max. |
| | | Maximum | | 3 mA | |
| | LED turn off current | Minimum | I _{Foff} | 0.4 mA | I _L = Max. |
| | | Typical | | 0.8 mA | |
| | LED dropout voltage | Typical | V _F | 1.25 V (1.14 V at I _F = 5 mA) | I _F = 50 mA |
| Maximum | | 1.5 V | | | |
| Output | On resistance | Typical | R _{on} | 10.2 Ω | I _F = 5 mA I _L = Max. Within 1 s |
| | | Maximum | | 16 Ω | |
| | Off state leakage current | Maximum | I _{Leak} | 1 μA | |
| Transfer characteristics | Turn on time* | Typical | T _{on} | 0.8 ms | I _F = 5 mA I _L = Max. |
| | | Maximum | | 2 ms | |
| | Turn off time* | Typical | T _{off} | 0.04 ms | I _F = 5 mA I _L = Max. |
| | | Maximum | | 0.2 ms | |
| | I/O capacitance | Typical | C _{iso} | 0.8 pF | f = 1 MHz V _B = 0 V |
| | | Maximum | | 1.5 pF | |
| Initial I/O isolation resistance | Minimum | R _{iso} | 1,000 MΩ | 500 V DC | |

*Turn on/Turn off time

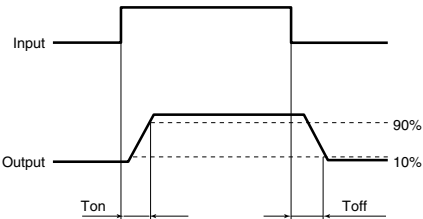

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item | | Symbol | Number of used channels | Min. | Max. | Unit |
|-----------|-------------------------|----------------|-----------------------------------|------|--------------|------|
| AQW254(A) | LED current | I _F | <div><div></div></div> 1ch 2ch | 5 | 30 | mA |
| | Load voltage (Peak AC) | V _L | | — | 320 | V |
| | Continuous load current | I _L | | — | 0.16 0.12 | A |


■ These products are not designed for automotive use.
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

When using 2 channels

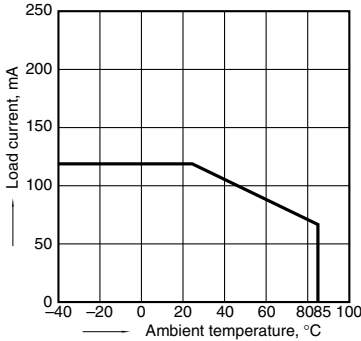


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6,
7 and 8; LED current: 5 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

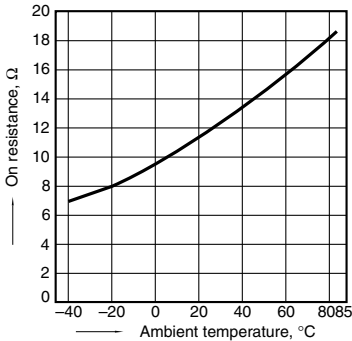


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

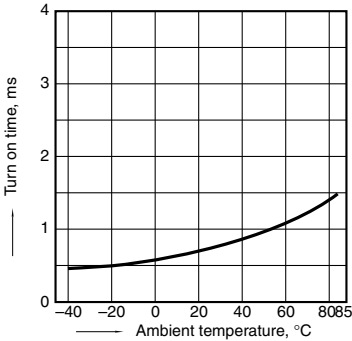


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

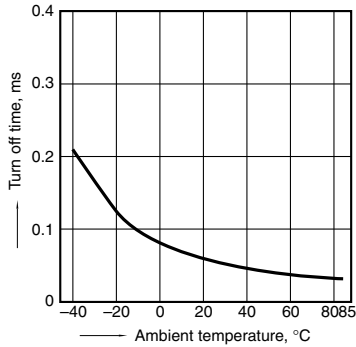


5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

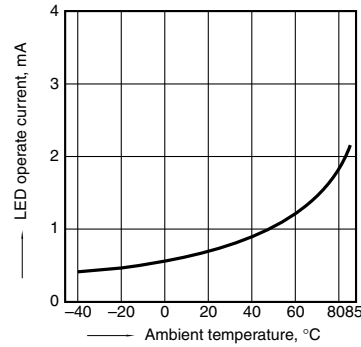


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

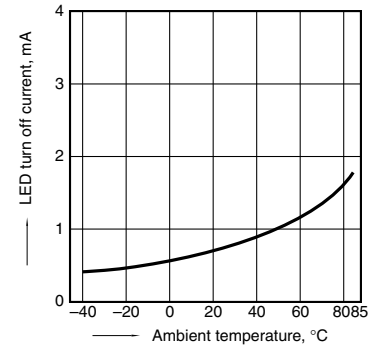


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

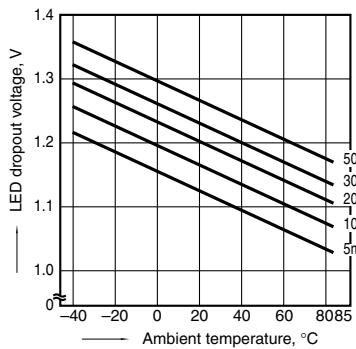


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

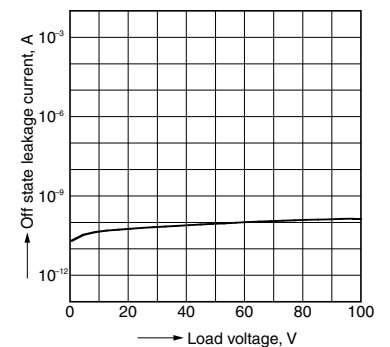


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

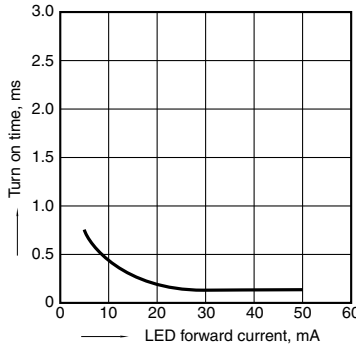


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

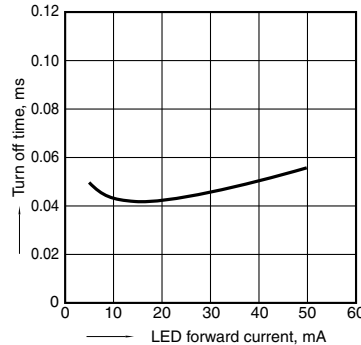

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

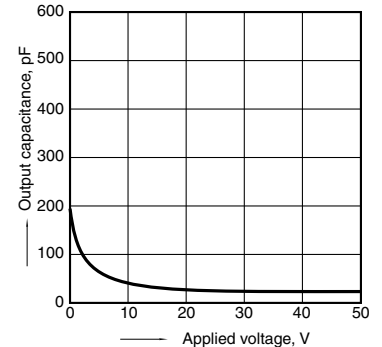

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017