

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.15kg min.

Durability : 25 Cycles

Electrical

Voltage Rating: 25V

Current Rating: 0.3A

Contact Resistance: 50mΩ max.

Dielectric Withstanding Voltage: 250V AC/1 min.

Insulation Resistance: 100MΩ

Physical

Housing: Thermoplastic, UL 94V-0 rated in Ivory Color

Contact: Copper alloy

Plating: See "ORDERING INFORMATION"

Metal Spring: Copper alloy

Operating Temperature: -40 to +85


DDR SO DIMM Socket

AS Series


5.2mm Height SMT Type

0.60mm [0.024"] Pitch

200 Pos.

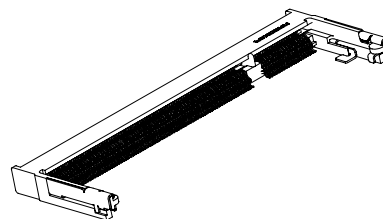

DRAWING

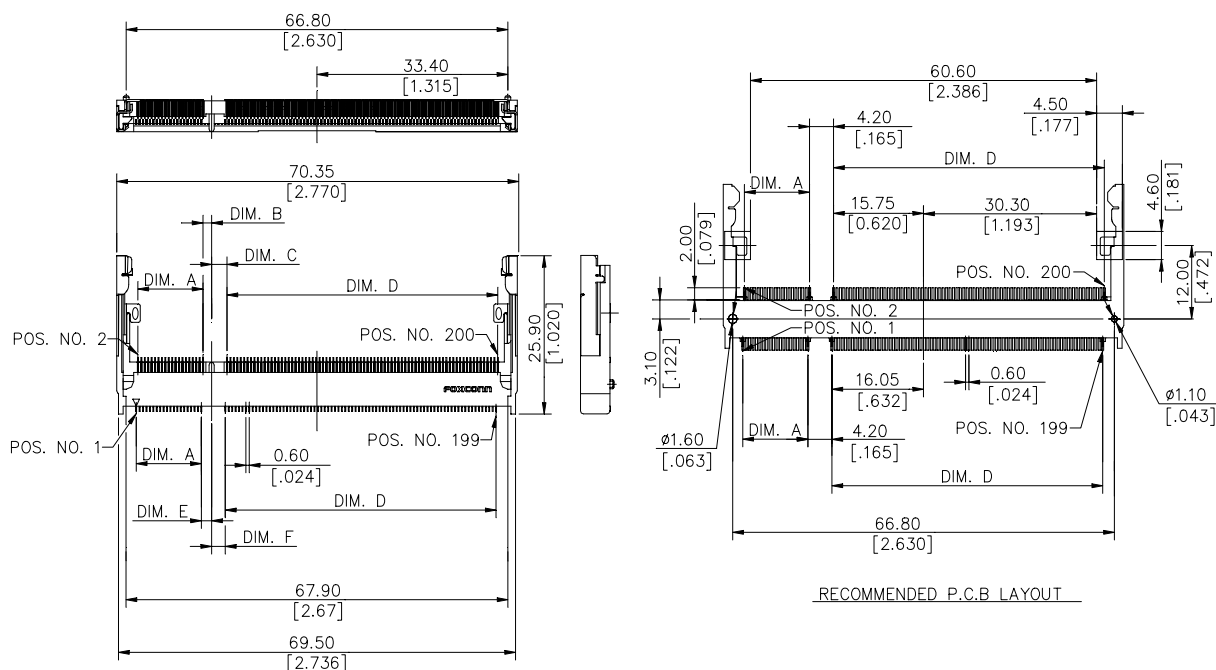

ORDERING INFORMATION

PRODUCT NO.: A S 0 A4 2 6 - B2 *

Memory Module Socket

Horizontal Type

Single Row

No. of Pos.
A4=200 Pos.

S=Standard Type
R=Reverse Type

B2 =5.2mm Height

Contact Area Plating
6=10u" Gold

SMT Type

AS0A426-B2R	11.40 [.449]	2.70 [.108]	1.50 [.059]
AS0A426-B2S	47.40 [1.866]	1.80 [.071]	2.40 [.094]
P/N	DIM. D	DIM. E	DIM. F
AS0A426-B2R	47.40 [1.866]	2.40 [.094]	1.80 [.071]
AS0A426-B2S	11.40 [.449]	1.50 [.059]	2.70 [.108]
P/N	DIM. A	DIM. B	DIM. C