

AT-64020

Up to 4 GHz Linear Power Silicon Bipolar Transistor



Data Sheet

Description


The AT-64020 is a high performance NPN silicon bipolar transistor housed in a hermetic BeO disk package for good thermal characteristics. This device is designed for use in medium power, wide band amplifier and oscillator applications operating over VHF, UHF and microwave frequencies.

Excellent device uniformity, performance and reliability are produced by the use of ion-implantation, self-alignment techniques, and gold metallization in the fabrication of these devices. The use of ion-implanted ballast resistors ensures uniform current distribution through the multiple emitter fingers.

Features

- High Output Power:
27.5 dBm Typical P1 dB at 2.0 GHz
26.5 dBm Typical P1 dB at 4.0 GHz
- High Gain at 1 dB Compression:
10.0 dB Typical G1 dB at 2.0 GHz
6.5 dB Typical G1 dB at 4.0 GHz
- 35% Total Efficiency
- Emitter Ballast Resistors
- Hermetic, Metal/Beryllia Package

200 mil BeO Package



AT-64020 Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum ^[1]
V_{EBO}	Emitter-Base Voltage	V	2
V_{CBO}	Collector-Base Voltage	V	40
V_{CEO}	Collector-Emitter Voltage	V	20
I_C	Collector Current	mA	200
P_T	Power Dissipation ^[2,3]	W	3
T_j	Junction Temperature	°C	200
T_{STG}	Storage Temperature	°C	-65 to 200

Thermal Resistance^[2,4]:

$$\theta_{jc} = 40^{\circ}\text{C/W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. $T_{case} = 25^{\circ}\text{C}$.
3. Derate at 25 mW/°C for $T_c > 80^{\circ}\text{C}$.
4. The small spot size of this technique results in a higher, though more accurate determination of θ_{jc} than do alternate methods. See MEASUREMENTS section "Thermal Resistance" for more information.

Electrical Specifications, $T_A = 25^{\circ}\text{C}$

Symbol	Parameters and Test Conditions ^[1]	Units	Min.	Typ.	Max.
$ S_{21E} ^2$	Insertion Power Gain; $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$	$f = 2.0\text{ GHz}$ $f = 4.0\text{ GHz}$		7.0 2.0	
$P_{1\text{ dB}}$	Power Output @ 1 dB Gain Compression $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$	$f = 2.0\text{ GHz}$ $f = 4.0\text{ GHz}$	26.5	27.5 26.5	
$G_{1\text{ dB}}$	1 dB Compressed Gain; $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$	$f = 2.0\text{ GHz}$ $f = 4.0\text{ GHz}$	8.5	10.0 6.5	
η_T	Total Efficiency at 1 dB Compression: $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$	$f = 4.0\text{ GHz}$		35.0	
h_{FE}	Forward Current Transfer Ratio; $V_{CE} = 8\text{ V}$, $I_C = 110\text{ mA}$	—	20	50	200
I_{CBO}	Collector Cutoff Current; $V_{CB} = 16\text{ V}$	μA			100
I_{EBO}	Emitter Cutoff Current; $V_{EB} = 1\text{ V}$	μA			5.0

Note:

1. $\eta_T = (\text{RF Output Power})/(\text{RF Input Power} + \text{VCEIC})$.

AT-64020 Typical Performance, $T_A = 25^\circ\text{C}$

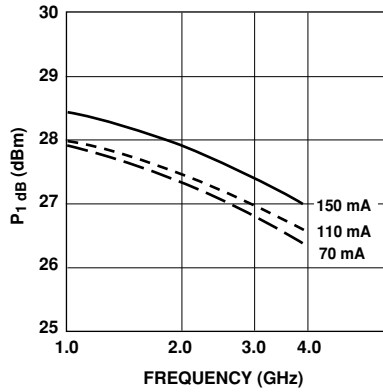


Figure 1. Power Output @ 1 dB Gain Compression vs. Frequency and Collector Current. $V_{CE} = 16\text{ V}$.

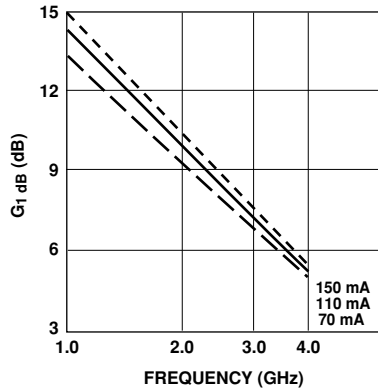


Figure 2. 1 dB Compressed Gain vs. Frequency and Collector Current. $V_{CE} = 16\text{ V}$.

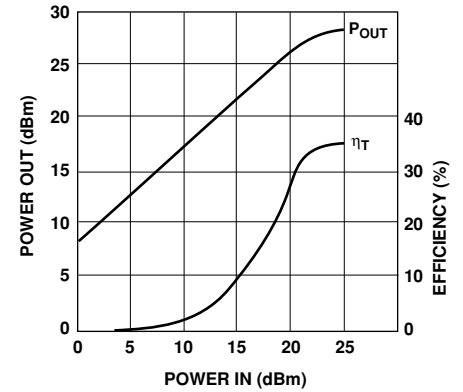


Figure 3. Output Power and Efficiency vs. Input Power. $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$, $f = 4.0\text{ GHz}$.

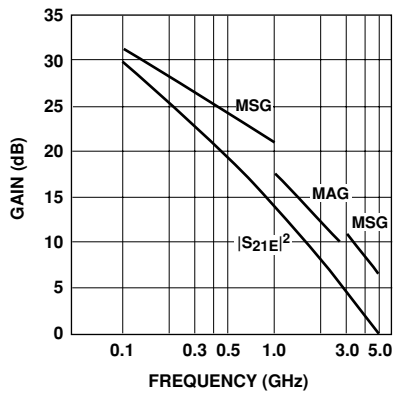


Figure 4. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency. $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$.

Typical Scattering Parameters, Common Emitter, $Z_0 = 50\ \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 16\text{ V}$, $I_C = 110\text{ mA}$


Freq. GHz	S ₁₁		S ₂₁			S ₁₂			S ₂₂	
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.
0.1	.61	-116	30.0	31.51	130	-33.1	.022	57	.67	-48
0.5	.75	-173	18.4	8.27	86	-28.8	.036	41	.23	-88
1.0	.75	171	12.5	4.23	66	-27.4	.043	49	.20	-100
1.5	.74	159	9.2	2.90	50	-23.5	.067	48	.21	-110
2.0	.74	148	7.0	2.23	35	-21.6	.083	46	.25	-120
2.5	.73	141	5.2	1.82	26	-19.8	.103	47	.27	-127
3.0	.73	130	3.8	1.56	12	-17.5	.133	41	.32	-135
3.5	.74	119	2.7	1.37	-2	-16.1	.157	35	.35	-146
4.0	.73	107	1.8	1.23	-16	-14.7	.186	26	.38	-158
4.5	.72	93	0.9	1.11	-30	-13.3	.217	18	.41	-168
5.0	.71	79	0.1	1.01	-43	-11.8	.256	8	.42	179

A model for this device is available in the DEVICE MODELS section.

Ordering Information

Part Number	No. of Devices
AT-64020	100

200 mil BeO Package Dimensions

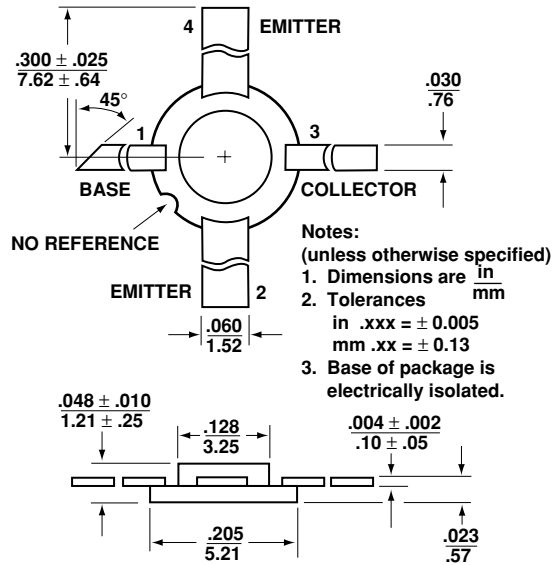

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries. Data subject to change. Copyright © 2008 Avago Technologies Limited. All rights reserved. Obsoletes 5989-2657EN AV02-1220EN May 5, 2008

AVAGO
TECHNOLOGIES