

AT-12864I


•128x64 dots 1/64 Duty

FEATURE

- 1.Construction : FSTN LCD a
- 2.LCD Driver : SED1565T04.
- 3.On-chip LCD booster.
- 4.Extended temperature type.

液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

BLOCK DIAGRAM

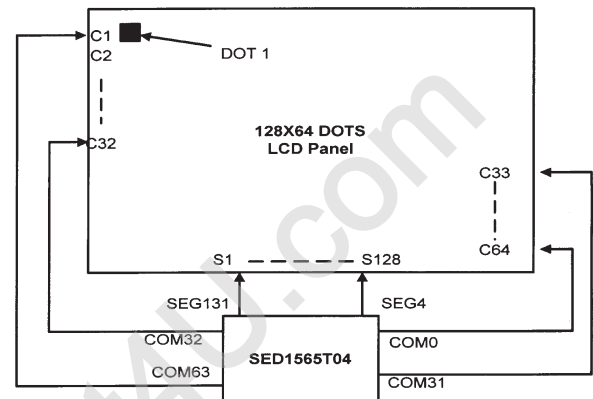

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Typ. Value	Unit.
LCD Driving Voltage	VDD-V5	25°C	9.0	V
Logic Supply Current	IDD	VDD=3V	0.5	mA

INTERFACE

1	2	3	4	5	6	7	8	9	10	11
NC	FR	CL/	DOF/	CS1	CS2 /RES	A0	/WR	/RD	D0	
12	13	14	15	16	17	18	19	20	21	22
D1	D2	D3	D4	D5	D6	D7	VDD	VSS	VSS2	VOUT
23	24	25	26	27	28	29	30	31	32	33
CAP3- CAP1+	CAP1-	CAP2-	CAP2+	VRS	VDD	V1	V2	V3	V4	
34	35	36	37	38	39	40	41	42	43	
V5	VR	VDD	M/S	CLS	C86	P/S	/HPM	IRS	NC	

