

## AUG Series

30 Watts

Total Power: 30 Watts  
Input Voltage: 36V - 75V  
# of Outputs: Single



## Special Features

- Ultra Low Profile - 4.4mm
- Efficiency - 91% @ 5V
- -40°C to +85°C Operating temperature(Ambient)
- Open Frame SMT
- Low output ripple and noise
- Regulation to zero load
- CISPR22, Class A for Conduct and Radiated EMI
- Parallel Application
- Pb-free reflow compatible and ROHS compliant

## Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency	91% @ 5Vo
Output	
Line / Load Regulation	+5%, -3%
Noise / Ripple	50mV p-p
OVP	120% of Vo <sub>nom</sub> (latch-up)
OCP	6.2A for 5V 9.3A for 3.3V 10.3A for 2.5V 11.3A for 1.5V and 1.8V
LVP	95% of Vo <sub>nom</sub> (latch-up)
Isolation	1500VDC
Control	
Enable	ON: RC pin connected to -Vin or open OFF: RC pin connected to +Vin

## Environmental Specifications

Ambient Operating temperature	-40°C to +85°C (forced air 0.2m/s)
Storage temperature	-45°C to +90°C

## Safety


UL 60950  
CE CE Mark



## Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
48V	1.5V @ 11A	85% (Typ)	AUK11M48
48V	1.8V @ 11A	86% (Typ)	AUK11Y48
48V	2.5V @ 10A	89% (Typ)	AUK10G48
48V	3.3V @ 9A	90% (Typ)	AUK09F48
48V	5.0V @ 6A	91% (Typ)	AUK06A48

## Pin Assignment

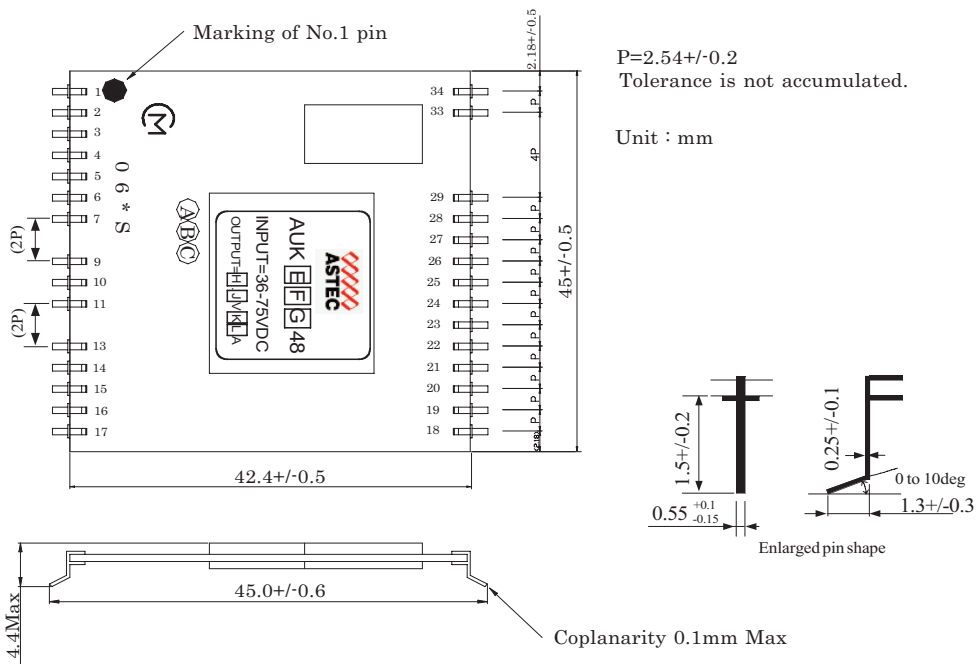

## Pin Assignments

Pin No	Symbol	Function	Pin No	Symbol	Function
1, 2, 16,	NC	Mechanical supplemental contact pins	11	-Vin	Input
19, 33,	-	-	13	+Vin	Input
3	ALM	Alarm output	14	+Vin	Input
4	NC	-	15	+Vin	Input
5	RC	-Remote On/Off control	20	+Vin	Output
6	NC	-	21	+Vin	Output
7	PO	Parallel Operation	22	+Vin	Output
9	-Vin	Input	23	+Vin	Output
10	-Vin	Input	24, 25, 26	-Vout	Output
			27, 28, 29		

Note: Astec reserves the right to make changes to the information contained herein without notice and assumes no liability of its use and application.

## Astec Power

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698  
Technical Support: +1 888 41 ASTEC  
or +1 407 241 2752

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21  
Tower 1, Metroplaza  
223, Hing Fong Road  
Kwai Fong, New Territories  
Hong Kong  
Telephone: +852 2437 9662  
Facsimile: +852 2402 4426

For global contact, visit:

[www.astecpower.com](http://www.astecpower.com)  
[technicalsupport@astec.com](mailto:technicalsupport@astec.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

## Emerson Network Power.

The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2005 Emerson Electric Co.