



AVF 49xyA

Jan/2004



AVF 49xyA Audio/Video Front-End

The AVF 49xyA is a fully integrated Audio-Video Front-end solution specifically well suited for DVD recorder and personal video recorder (PVR) applications. It combines the functional units of both a Multistandard Sound Processor (MSP) and a Video Pixel Decoder (VPX) and it provides the audio/video synchronization of the output signal. The AVF 49xyA comes in a PQFP128 package.

The MSP unit covers the sound processing of all analog TV standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing – starting with analog sound IF signal input down to processed analog AF signal output – is performed.

The VPX unit provides the full-feature video acquisition for consumer and multimedia applications. All of the processing capability necessary to convert an analog video signal in CVBS, Y/C or YC_rC_b format into a digital component stream is integrated. Additionally, text slicing for Intericast, Teletext, and Closed Caption is provided. For improved Y/C separation, an adaptive 4H comb filter is included.

General Features

- ◆ I²C interface with different device addresses for using two AVF 49xyA in one system
- ◆ Audio / video synchronization either in Master or Slave mode
- ◆ PQFP128-2 package

Video Features

- ◆ High-performance adaptive 4H comb filter Y/C separator with adjustable vertical peaking
- ◆ Multistandard color decoding:
 - NTSC-M, NTSC-443
 - PAL-BDGH, PAL-M, PAL-N, PAL-60
 - SECAM, S-VHS
- ◆ Video ADCs with clamping and automatic gain control (AGC)
- ◆ Seven analog inputs with integrated selector for the following sources:
 - 4×composite video (CVBS), or
 - 2×CVBS and 2×Y/C (S-VHS), or
 - 2×CVBS, 1×Y/C and 1×YP_rP_b
- ◆ Decoding and detection of full Macrovision 7.01 protected video

- ◆ Dual-window cropping and scaling
- ◆ Horizontal resizing between 32 and 864 pixels/line
- ◆ High-quality anti-aliasing filter
- ◆ Scaling controlled peaking and coring
- ◆ Digital YC_rC_b 4:2:2 format
- ◆ ITU-R 601/656 compliant output format
- ◆ Square pixel format (640/768 pixels/line)
- ◆ 8-bit or 16-bit synchronous output mode
- ◆ 13.5 MHz/16-bit and 27 MHz/8-bit output rate
- ◆ VBI bypass and raw ADC data output
- ◆ High-performance hardware data slicing
- ◆ Multistandard data slicer
 - NABTS, WST
 - CAPTION (1×, 2×), CGMS, VPS, WSS, Antiope
- ◆ Full support for
 - Teletext, Intericast
 - WebTV for Windows, EPG services
- ◆ VBI and Full-field mode
- ◆ Data insertion into video stream
- ◆ Simultaneous acquisition of Teletext, VPS, WSS, and Caption

AVF 49xyA

Jan/2004

Audio Features

- ◆ Standard selection with single I²C transmission
- ◆ Automatic standard detection of terrestrial TV standards
- ◆ Automatic sound selection (mono/stereo/bilingual), new registers MODUS, STATUS
- ◆ Sound IF (SIF) input
- ◆ Automatic-carrier-mute function
- ◆ Interrupt output programmable (indicating status change)
- ◆ Main/Aux channel with volume
- ◆ Automatic volume correction (AVC)
- ◆ Two channel mixer
- ◆ Selectable preemphasis for Aux channel
- ◆ Four stereo Line inputs, two stereo Line outputs
- ◆ Complete Line in/out switching matrix
- ◆ Two 48-kHz I²S inputs; one asynchronous 5 ... 50-kHz I²S input, one asynchronous I²S output
- ◆ All analog Mono sound carriers including AM-SECAM
- ◆ All analog FM-Stereo A2 and satellite standards
- ◆ All NICAM standards
- ◆ Simultaneous demodulation of (very) high-deviation FM-Mono and NICAM
- ◆ Demodulation of the BTSC multiplex signal and the SAP channel
- ◆ Alignment-free digital DBX noise reduction for BTSC Stereo and SAP
- ◆ BTSC stereo and EIA-J separation significantly better than spec.
- ◆ SAP and stereo detection for BTSC
- ◆ Korean FM-Stereo A2 standard
- ◆ Alignment-free Japanese standard EIA-J
- ◆ Demodulation of the FM-Radio multiplex signal

System Application

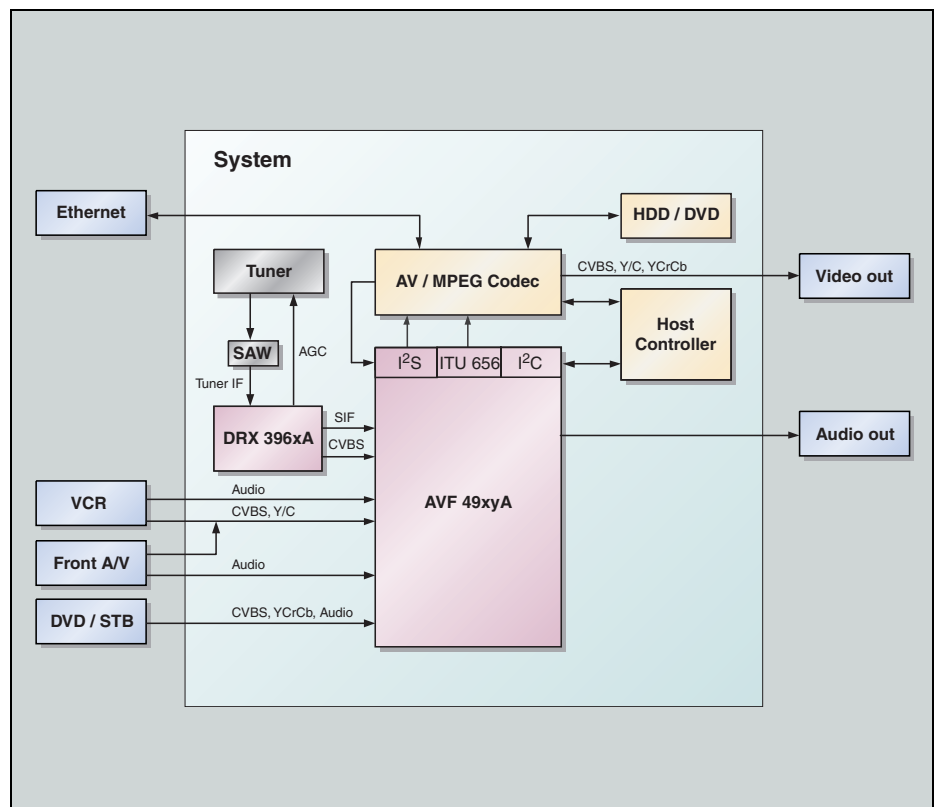


Fig. 1: Digital video recorder system with the AVF 49xyA

All information and data contained in this product information are without any commitment, are not to be considered as an offer for conclusion of a contract, nor shall they be construed as to create any liability. Product or development sample availability and delivery are exclusively subject to our respective order confirmation form. By this publication, Micronas GmbH does not assume responsibility for patent infringements or other rights of third parties which may result from its use.

No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of Micronas GmbH.

Edition Jan. 29, 2004; Order No. 6251-625-1PI